



Sales Manual Accessories 2022

Net list, valid as of October 1, 2021


1

Base unit accessories
Sink unit accessories
Waste collector

Plastic cutlery trays and pull-out organisers




Cutlery tray Trend
grey, height: 43 mm,
fits drawer depth of 500 mm,
side depth: 561 mm
500 mm depth: Also fits lowered frame MP-NIEZA

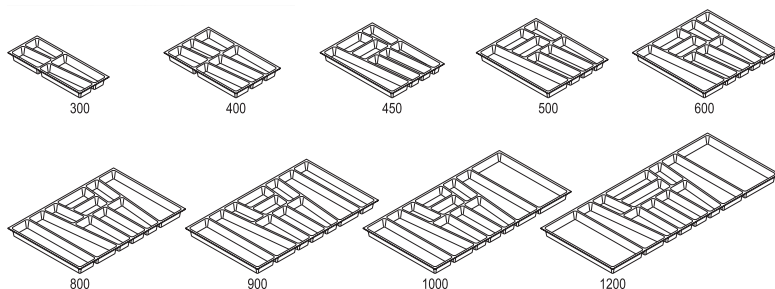

| | | | |
|----|-----|-------|----|
| BE | 30 | 26121 | 12 |
| BE | 40 | 26122 | 12 |
| BE | 45 | 26123 | 12 |
| BE | 50 | 26124 | 13 |
| BE | 60 | 26126 | 13 |
| BE | 80 | 26128 | 19 |
| BE | 90 | 26129 | 19 |
| BE | 100 | 26130 | 22 |
| BE | 120 | 26132 | 25 |


**as above, however for drawer depth 400 mm,
side depth 461 mm**

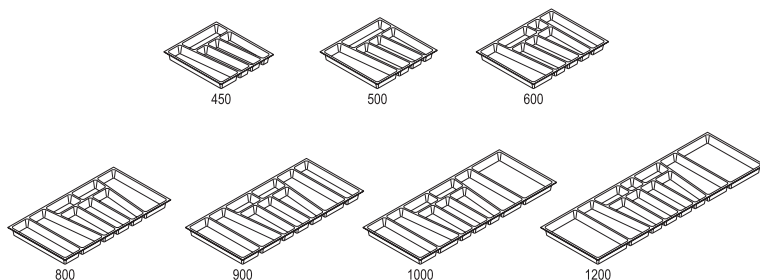

| | | | |
|----|--------|-------|----|
| BE | 45-46 | 26104 | 12 |
| BE | 50-46 | 26105 | 13 |
| BE | 60-46 | 26106 | 13 |
| BE | 80-46 | 26108 | 19 |
| BE | 90-46 | 26109 | 20 |
| BE | 100-46 | 26110 | 22 |
| BE | 120-46 | 26111 | 25 |




Cutlery tray Move
silver grey, with dividers for customisable divisions,
height: 47 mm,
fits drawer depth of 500 mm,
side depth: 561 mm
500 mm depth: Also fits lowered frame MP-NIEZA

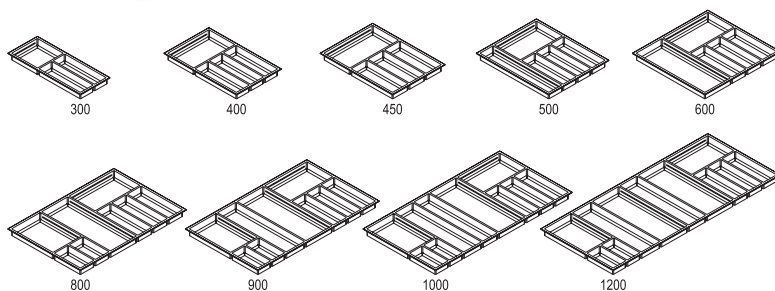

















| | | | | |
|----|-----|---|-------|----|
| BE | 30 | M | 26561 | 25 |
| BE | 40 | M | 26562 | 29 |
| BE | 45 | M | 26563 | 29 |
| BE | 50 | M | 26564 | 31 |
| BE | 60 | M | 26565 | 34 |
| BE | 80 | M | 26566 | 45 |
| BE | 90 | M | 26567 | 48 |
| BE | 100 | M | 26568 | 51 |
| BE | 120 | M | 26569 | 57 |

**as above, however for drawer depth 400 mm,
side depth 461 mm**

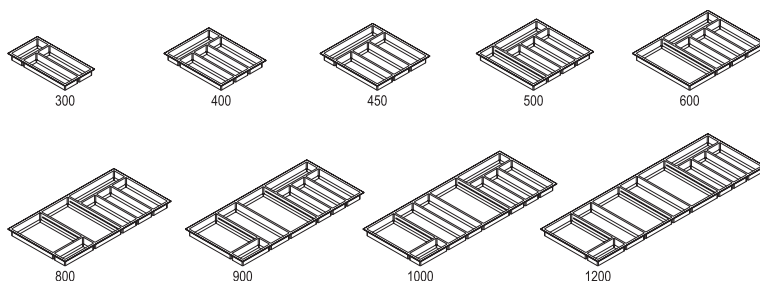


























| | | | | |
|----|--------|---|-------|----|
| BE | 30-46 | M | 26571 | 25 |
| BE | 40-46 | M | 26572 | 29 |
| BE | 45-46 | M | 26573 | 29 |
| BE | 50-46 | M | 26574 | 31 |
| BE | 60-46 | M | 26575 | 34 |
| BE | 80-46 | M | 26576 | 45 |
| BE | 90-46 | M | 26577 | 48 |
| BE | 100-46 | M | 26578 | 51 |
| BE | 120-46 | M | 26579 | 57 |


Base unit accessories

| Base unit accessories | | Abbreviation | | | Order No. | Points |
|--|---|--------------|-----|-------|-----------|--------|
| | | Width in cm | | | | |
|  <p>Cutlery tray Move with knife block silver grey, solid wood knife block, with dividers for customisable divisions, height: 47 mm, fits drawer depth of 500 mm, side depth: 561 mm 500 mm depth: Also fits lowered frame MP-NIEZA</p>     | | BE-M | 80 | M | 26581 | 83 |
| | | BE-M | 90 | M | 26582 | 86 |
| | | BE-M | 100 | M | 26583 | 89 |
| | | BE-M | 120 | M | 26584 | 95 |
|  <p>Cutlery tray Move with insert for spice jars silver grey, insert for spice jars, solid wood, with dividers for customisable divisions, height: 47 mm, fits drawer depth of 500 mm, side depth: 561 mm 500 mm depth: Also fits lowered frame MP-NIEZA <i>For drawers in 141 mm height, do not use in conjunction with construction or spacer shelf KKB* / DBKI*.</i> <i>Not for use in conjunction with LED interior unit light LSID.</i></p>     | | BE-G | 80 | M | 26586 | 67 |
| | | BE-G | 90 | M | 26587 | 72 |
| | | BE-G | 100 | M | 26588 | 73 |
| | | BE-G | 120 | M | 26589 | 80 |
| | <p>Spices 12 jars, a selection of the most common spices <i>Not available in: USA, Canada.</i></p> | GD12 | | | 9487 | 28 |
|  <p>Cutlery tray Move with insert for foil dispenser silver grey, insert for foil dispenser, solid wood, with dividers for customisable divisions, height: 47 mm, fits drawer depth of 500 mm, side depth: 561 mm 500 mm depth: Also fits lowered frame MP-NIEZA</p>     | | BE-F | 80 | M | 26591 | 112 |
| | | BE-F | 90 | M | 26592 | 117 |
| | | BE-F | 100 | M | 26593 | 118 |
| | | BE-F | 120 | M | 26594 | 127 |
|  <p>Universal organiser alu profile with 4 dividers for individualised divisions, height: 125 mm, fits pull-out depth of 500 mm, side depth: 561 mm, 1 alu profile for 600 mm width, 2 alu profiles for widths 800 - 900 mm, 3 alu profiles for widths 1000 - 1200 mm <i>Please order the correct number for the unit width!</i></p> | AUO | | 56 | 26156 | 60 | |
| | <p>as above, however for pull-out depth 400 mm, side depth 461 mm</p> | AUO | | 46 | 26146 | 58 |


Base unit accessories


| Base unit accessories | | Abbreviation | | | Order No. | Points | | |
|---|--|--------------|-------------|-------|-----------|--------|--|------|
| | | | Width in cm | | | | | |
|  <p>Cutlery tray Concept Non-slip soft touch surface, anthracite, height: 52 mm, fits drawer depth 500 mm, side depth: 561 mm</p>          | BE | 30 | C | 39603 | 10 | | | |
| | BE | 40 | C | 39604 | 12 | | | |
| | BE | 45 | C | 39645 | 13 | | | |
| | BE | 50 | C | 39605 | 13 | | | |
| | BE | 60 | C | 39606 | 16 | | | |
| | BE | 80 | C | 39608 | 28 | | | |
| | BE | 90 | C | 39609 | 32 | | | |
| | BE | 100 | C | 39621 | 34 | | | |
| | BE | 120 | C | 39622 | 47 | | | |
|  <p>Cutlery tray Concept with knife block Non-slip soft touch surface, anthracite, knife block, solid wood, height: 52 mm, fits drawer depth 500 mm, side depth: 561 mm</p>     | BE-M | 80 | C | 39638 | 72 | | | |
| | BE-M | 90 | C | 39639 | 77 | | | |
| | BE-M | 100 | C | 39641 | 79 | | | |
| | BE-M | 120 | C | 39642 | 92 | | | |
|  <p>Cutlery tray Concept with insert for spice jars Non-slip soft touch surface, anthracite, insert for spice jars, solid wood, height: 52 mm, fits drawer depth 500 mm, side depth: 561 mm</p> <p><i>For drawers in 141 mm height, do not use in conjunction with construction or spacer shelf KKB* / DBKI*.</i></p> <p><i>Not for use in conjunction with LED interior unit light LSID.</i></p>     | BE-G | 80 | C | 39658 | 58 | | | |
| | BE-G | 90 | C | 39659 | 64 | | | |
| | BE-G | 100 | C | 39661 | 66 | | | |
| | BE-G | 120 | C | 39662 | 79 | | | |
| | Spices 12 jars, a selection of the most common spices <i>Not available in: USA, Canada.</i> | | | | | GD12 | | 9487 |
|  <p>Cutlery tray Concept with insert for foil dispenser Non-slip soft touch surface, anthracite, insert for foil dispenser, solid wood, height: 52 mm, fits drawer depth 500 mm, side depth: 561 mm</p>     | BE-F | 80 | C | 39678 | 130 | | | |
| | BE-F | 90 | C | 39679 | 133 | | | |
| | BE-F | 100 | C | 39681 | 134 | | | |
| | BE-F | 120 | C | 39682 | 147 | | | |
















Base unit accessories

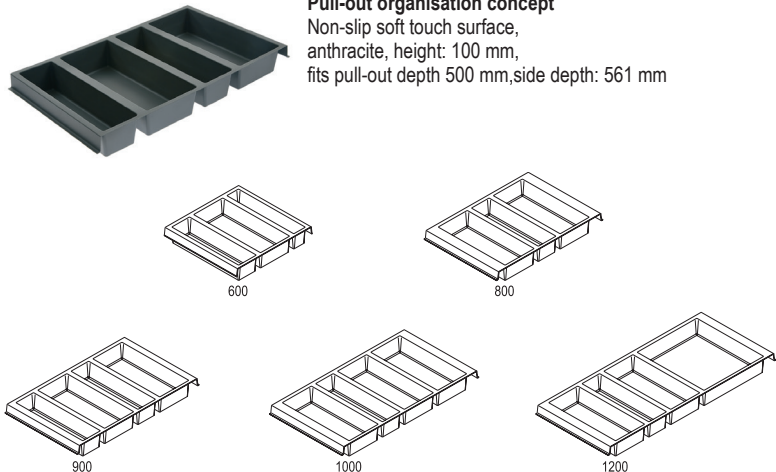
























| Base unit accessories | | | | | Abbreviation | | Order No. | Points |
|---|----|-----|---|-------|--------------|--|-----------|--------|
| | | | | | Width in cm | | | |
|  <p>Pull-out organisation concept Non-slip soft touch surface, anthracite, height: 100 mm, fits pull-out depth 500 mm,side depth: 561 mm</p> | AO | 60 | C | 39686 | 47 | | | |
| | AO | 80 | C | 39688 | 61 | | | |
| | AO | 90 | C | 39689 | 66 | | | |
| | AO | 100 | C | 39691 | 72 | | | |
| | AO | 120 | C | 39692 | 80 | | | |


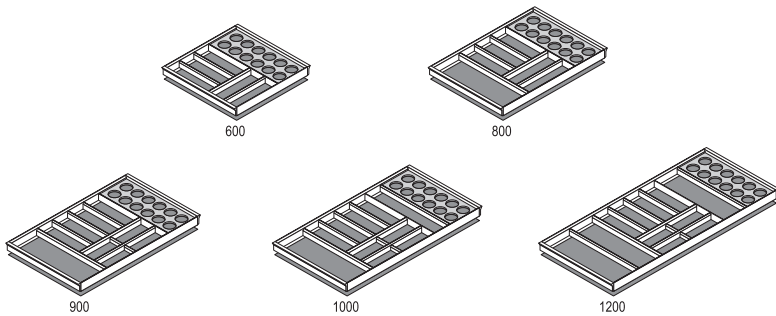

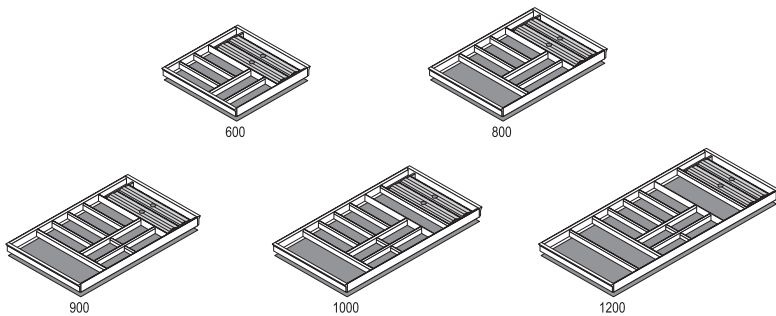


Beech cutlery trays and pull-out organisers




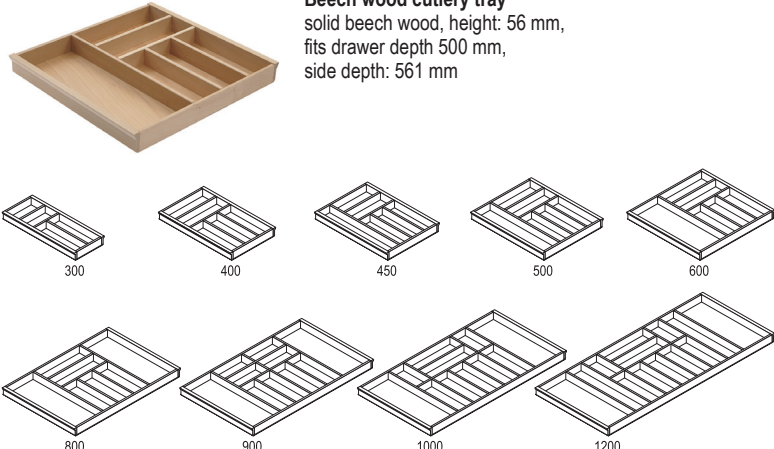



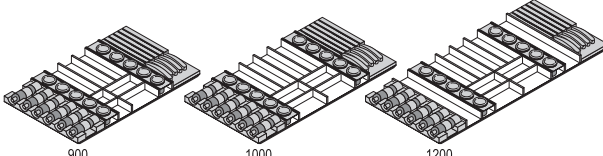

| | | | | | |
|---|----|-----|---|-------|-----|
|  <p>Beech wood cutlery tray solid beech wood, height: 56 mm, fits drawer depth 500 mm, side depth: 561 mm</p> | BE | 30 | H | 36011 | 29 |
| | BE | 40 | H | 36012 | 45 |
| | BE | 45 | H | 36013 | 48 |
| | BE | 50 | H | 36024 | 51 |
| | BE | 60 | H | 36026 | 53 |
| | BE | 80 | H | 36028 | 72 |
| | BE | 90 | H | 36029 | 77 |
| | BE | 100 | H | 36030 | 88 |
| | BE | 120 | H | 36032 | 105 |
| | | | | | |

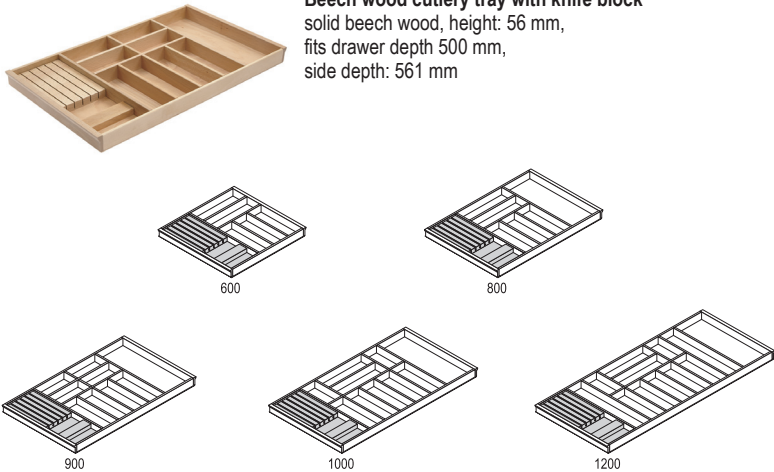



| | | | | | |
|---|------|-----|---|-------|-----|
|  <p>Beech wood cutlery tray with knife block solid beech wood, height: 56 mm, fits drawer depth 500 mm, side depth: 561 mm</p> | BE-M | 60 | H | 36036 | 79 |
| | BE-M | 80 | H | 36038 | 99 |
| | BE-M | 90 | H | 36039 | 111 |
| | BE-M | 100 | H | 36040 | 121 |
| | BE-M | 120 | H | 36042 | 133 |




| Base unit accessories | | | Abbreviation | | | Order No. | Points |
|--|---|--|--------------|-----|---|-----------|--------|
| | | | Width in cm | | | | |
|  | Beech wood cutlery tray with insert for spice jars solid beech wood, height: 56 mm, fits drawer depth 500 mm, side depth: 561 mm <i>For drawers in 141 mm height, do not use in conjunction with construction or spacer shelf KKB* / DBKI*.</i> <i>Not for use in conjunction with LED interior unit light LSID.</i> | | BE-G | 60 | H | 36046 | 77 |
| | | | BE-G | 80 | H | 36048 | 99 |
| | | | BE-G | 90 | H | 36049 | 110 |
| | | | BE-G | 100 | H | 36050 | 118 |
| | | | BE-G | 120 | H | 36052 | 133 |
| | | | | | | | |
|  600  800  900  1000  1200 | | | | | | | |
| | Spices 12 jars, a selection of the most common spices <i>Not available in: USA, Canada.</i> | | GD12 | | | 9487 | 28 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
|  | Beech wood cutlery tray with insert for foil dispenser solid beech wood, height: 56 mm, fits drawer depth 500 mm, side depth: 561 mm | | BE-F | 60 | H | 36056 | 146 |
| | | | BE-F | 80 | H | 36058 | 166 |
| | | | BE-F | 90 | H | 36059 | 178 |
| | | | BE-F | 100 | H | 36060 | 185 |
| | | | BE-F | 120 | H | 36062 | 199 |
| | | | | | | | |
|  600  800  900  1000  1200 | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
|  | Universal organiser, beech with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 8 solid wood partitions in beech for 600 mm width, incl. 16 solid wood partitions in beech for 800/900/1000 mm width, incl. 24 solid wood partitions in beech for 1200 mm width | | AO | 60 | H | 36066 | 89 |
| | | | AO | 80 | H | 36068 | 139 |
| | | | AO | 90 | H | 36069 | 152 |
| | | | AO | 100 | H | 36070 | 166 |
| | | | AO | 120 | H | 36072 | 190 |
| | | | | | | | |
|  | Solid wood pegs in beech for universal organiser, in addition set of 8 pegs each, height: 160 mm, diameter: 25 mm | | AO-STAB | | | 3919 | 25 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
|  | Beech wood universal organiser with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 7 solid wood partitions in beech for 600 mm width, incl. 10 solid wood partitions in beech for 800/900/1000 mm width, incl. 13 solid wood partitions in beech for 1200 mm width | | AOS | 60 | H | 36076 | 128 |
| | 3 x 116 + 4 x 180 mm | | AOS | 80 | H | 36078 | 171 |
| | 2 x 116 + 6 x 180 + 2 x 148 mm | | AOS | 90 | H | 36079 | 194 |
| | 2 x 116 + 8 x 180 mm | | AOS | 100 | H | 36080 | 209 |
| | 10 x 180 mm | | AOS | 120 | H | 36082 | 222 |
| | 12 x 180 + 1 x 148 mm | | | | | | |
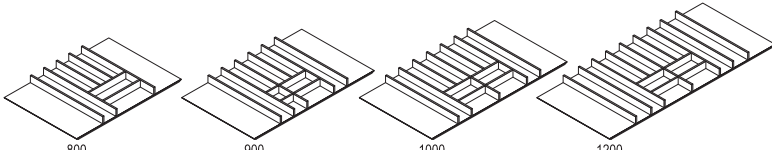
| Base unit accessories | | | | Abbreviation | | Order No. | Points |
|--|---|------|----|--------------|-------|-----------|--------|
| | | | | Width in cm | | | |
| Oak cutlery trays and pull-out organisers | | | | | | | |
|  <p>Oak wooden segment cutlery tray solid wood design in oak, with anti-slip mat in anthracite, height: 55 mm, segment width: 274 mm, fits drawer depth of 500 mm, side depth: 561 mm One wood segment is delivered up to a width of 600 mm. For widths exceeding 800 mm 2 wood segments are delivered.</p>         | BEHS | 40 | E | 48382 | 51 | | |
| | BEHS | 45 | E | 48383 | 54 | | |
| | BEHS | 50 | E | 48384 | 57 | | |
| | BEHS | 60 | E | 48386 | 61 | | |
| | BEHS | 80 | E | 48388 | 88 | | |
| | BEHS | 90 | E | 48389 | 89 | | |
| | BEHS | 100 | E | 48390 | 98 | | |
| | BEHS | 120 | E | 48396 | 112 | | |
| |  <p>Oak wooden cutlery tray solid wood design in oak, with anti-slip mat in anthracite, height: 55 mm, fits drawer depth of 500 mm, side depth: 561 mm</p>          | BE | 30 | E | 47321 | 45 | |
| | | BE | 40 | E | 47322 | 57 | |
| BE | | 45 | E | 47323 | 60 | | |
| BE | | 50 | E | 47324 | 63 | | |
| BE | | 60 | E | 47326 | 69 | | |
| BE | | 80 | E | 47328 | 93 | | |
| BE | | 90 | E | 47329 | 95 | | |
| BE | | 100 | E | 47330 | 112 | | |
| BE | | 120 | E | 47332 | 131 | | |
|  <p>Oak wooden cutlery tray with knife block solid wood design in oak, with anti-slip mat in anthracite, height: 55 mm, fits drawer depth of 500 mm, side depth: 561 mm</p>      | | BE-M | 60 | E | 47336 | 107 | |
| | BE-M | 80 | E | 47338 | 136 | | |
| | BE-M | 90 | E | 47339 | 136 | | |
| | BE-M | 100 | E | 47340 | 153 | | |
| | BE-M | 120 | E | 47342 | 171 | | |


| Base unit accessories | | | Abbreviation | | Order No. | Points | | | | |
|--|---|------|--------------|-------------|-----------|--------|---|-------|------|----|
| | | | | Width in cm | | | | | | |
|  <p>Oak wooden cutlery tray with insert for spice jars solid wood design in oak, with anti-slip mat in anthracite, height: 55 mm, fits drawer depth of 500 mm, side depth: 561 mm</p> <p><i>For drawers in 141 mm height, do not use in conjunction with construction or spacer shelf KKB* / DBKI*.</i></p> <p><i>Not for use in conjunction with LED interior unit light LSID.</i></p>  | BE-G | 60 | E | 47346 | 98 | | | | | |
| | BE-G | 80 | E | 47348 | 128 | | | | | |
| | BE-G | 90 | E | 47349 | 130 | | | | | |
| | BE-G | 100 | E | 47350 | 146 | | | | | |
| | BE-G | 120 | E | 47352 | 165 | | | | | |
| | | | | | | | | | | |
| | <p>Spices 12 jars, a selection of the most common spices</p> <p><i>Not available in: USA, Canada.</i></p> | | | | | GD12 | | | 9487 | 28 |
| |  <p>Oak wooden cutlery tray with insert for foil dispenser solid wood design in oak, with anti-slip mat in anthracite, height: 55 mm, fits drawer depth of 500 mm, side depth: 561 mm</p>  | BE-F | 60 | E | 47356 | 180 | | | | |
| | | BE-F | 80 | E | 47358 | 207 | | | | |
| | | BE-F | 90 | E | 47359 | 212 | | | | |
| BE-F | | 100 | E | 47360 | 223 | | | | | |
| BE-F | | 120 | E | 47362 | 244 | | | | | |
| | | | | | | | | | | |
|  <p>Universal organiser, oak with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 8 solid wood partitions in oak for 600 mm width, incl. 16 solid wood partitions in oak for 800/900/1000 mm width, incl. 24 solid wood partitions in oak for 1200 mm width</p> | AO | 60 | E | 48366 | 114 | | | | | |
| | AO | 80 | E | 48368 | 172 | | | | | |
| | AO | 90 | E | 48369 | 188 | | | | | |
| | AO | 100 | E | 48370 | 197 | | | | | |
| | AO | 120 | E | 48372 | 218 | | | | | |
| | | | | | | | | | | |
| <p>Solid wood pegs in oak for universal organiser, in addition set of 8 bars each, height: 160 mm, diameter: 25 mm</p> | | | | | AOSTAB | | E | 48381 | 48 | |
|  <p>Universal organiser, oak with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 7 solid wood partitions in oak for 600 mm width, incl. 10 solid wood partitions in oak for 800/900/1000 mm width, incl. 13 solid wood partitions in oak for 1200 mm width</p> | AOS | 60 | E | 48376 | 126 | | | | | |
| | AOS | 80 | E | 48378 | 172 | | | | | |
| | AOS | 90 | E | 48379 | 188 | | | | | |
| | AOS | 100 | E | 48380 | 196 | | | | | |
| | AOS | 120 | E | 48352 | 223 | | | | | |
| | | | | | | | | | | |

| Base unit accessories | | Abbreviation | | Order No. | Points | |
|---|--|--------------|-----|-----------|--------|-----|
| | | Width in cm | | | | |
| Black ash cutlery trays and pull-out organisers | | | | | | |
|  <p>Black ash wood cutlery tray solid ash wood, stained black, height: 56 mm, fits drawer depth of 500 mm, side depth: 561 mm</p>   | BE | 30 | N | 39403 | 51 | |
| | BE | 40 | N | 39404 | 54 | |
| | BE | 45 | N | 39445 | 57 | |
| | BE | 50 | N | 39405 | 63 | |
| | BE | 60 | N | 39406 | 67 | |
| | BE | 80 | N | 39408 | 67 | |
| | BE | 90 | N | 39409 | 85 | |
| | BE | 100 | N | 39410 | 92 | |
| | BE | 120 | N | 39412 | 110 | |
| |  <p>Black ash wood cutlery tray with knife block solid ash wood, stained black, incl. 5 knives, height: 56 mm, fits drawer depth of 500 mm, side depth: 561 mm</p> | BE-M | 60 | N | 39417 | 169 |
|  <p>Black ash wood cutlery tray with insert for spice mills solid ash wood, stained black, incl. 6 spice mills, height: 56 mm, fits drawer depth of 500 mm, side depth: 561 mm</p> | BE-GM | 60 | N | 39416 | 200 | |
|   <p>Black ash wood cutlery tray with knife block and insert for spice mills and spice jars solid ash wood, stained black, incl. 5 knives, 6 spice mills, 5 spice jars, height: 56 mm, fits drawer depth of 500 mm, side depth: 561 mm</p> | BE-MGG | 80 | N | 39418 | 388 | |
| | <p>as above, however as also includes 5 shaker cans</p>  | BEMGG | 90 | N | 39419 | 451 |
| | | BEMGG | 100 | N | 39420 | 466 |
| | | BEMGG | 120 | N | 39422 | 482 |
| |  <p>Universal organiser, black ash with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 8 solid wood partitions in ash for 600 mm width, incl. 16 solid wood partitions in ash for 800/900/1000 mm width, incl. 24 solid wood partitions in ash for 1200 mm width</p> | AO | 60 | N | 39426 | 107 |
| | | AO | 80 | N | 39428 | 161 |
| | | AO | 90 | N | 39429 | 169 |
| AO | | 100 | N | 39430 | 181 | |
| AO | | 120 | N | 39432 | 222 | |
| <p>Solid wood partitions in ash for universal organiser, in addition set of 8 bars each, height: 160 mm, diameter: 25 mm</p> | | AO-STAB | | N | 39444 | 41 |






| Base unit accessories | | | | Abbreviation | | | | Points |
|---|---|--------------------------------|---------|--------------|-------------|-------|-----------|--------|
| | | | | | | | | |
| | | | | | Width in cm | | Order No. | |
|  | Universal organiser, black ash with solid wood partitions for individualised divisions, fits pull-out depth 500 mm, side depth: 561 mm, incl. 7 solid wood partitions in ash for 600 mm width, incl. 10 solid wood partitions in ash for 800/900/1000 mm width, incl. 13 solid wood partitions in ash for 1200 mm width | 3 x 116 + 4 x 180 mm | AOS | 60 | N | 39436 | 120 | |
| | | 2 x 116 + 6 x 180 + 2 x 148 mm | AOS | 80 | N | 39438 | 168 | |
| | | 2 x 116 + 8 x 180 mm | AOS | 90 | N | 39439 | 177 | |
| | | 10 x 180 mm | AOS | 100 | N | 39440 | 190 | |
| | | 12 x 180 + 1 x 148 mm | AOS | 120 | N | 39442 | 219 | |
|  | Universal organiser, black ash with storage canisters with solid wood partitions for individualised divisions and insert for storage canisters, fits pull-out depth 500 mm, side depth: 561 mm, 600 mm width: with 3 storage canisters, for 800-1200 mm width: with 6 storage canisters, incl. 4 solid wood partitions in ash for 600/800/900 mm width, incl. 7 solid wood partitions in ash for 1000 mm width, incl. 10 solid wood partitions in ash for 1200 mm width, | | AOSV | 60 | N | 39446 | 334 | |
| | | | AOSV | 80 | N | 39448 | 359 | |
| | | | AOSV | 90 | N | 39449 | 371 | |
| | | | AOSV | 100 | N | 39450 | 403 | |
| | | | AOSV | 120 | N | 39452 | 439 | |
| Anti-slip mat for base units | | | | | | | | |
|  | Flocked linen mat anthracite, fits drawer depth of 500 mm, side depth: 561 mm <i>Other drawer dimensions can be cut.</i> | | EMB | 30 | | 49601 | 18 | |
| | | | EMB | 40 | | 49602 | 22 | |
| | | | EMB | 45 | | 49603 | 23 | |
| | | | EMB | 50 | | 49605 | 23 | |
| | | | EMB | 60 | | 49606 | 26 | |
| | | | EMB | 80 | | 49608 | 31 | |
| | | | EMB | 90 | | 49609 | 34 | |
| | | | EMB | 100 | | 49610 | 37 | |
| | | | EMB | 120 | | 49612 | 41 | |
|  | Anti-slip mat, anthracite fits drawers with pull-out depth of 500 mm, with 561 mm side depth. Other drawer dimensions can be cut. | | RM | 30 | | 26711 | 7,9 | |
| | | | RM | 40 | | 26712 | 10,1 | |
| | | | RM | 45 | | 26714 | 11,2 | |
| | | | RM | 50 | | 26715 | 11,7 | |
| | | | RM | 60 | | 26716 | 13 | |
| | | | RM | 80 | | 26718 | 16,6 | |
| | | | RM | 90 | | 26719 | 18,7 | |
| | | | RM | 100 | | 26720 | 19,9 | |
| | | | RM | 120 | | 26721 | 22,6 | |
| | as above, however fits drawers with pull-out depth of 400 mm, with 461 mm side depth. Other drawer dimensions can be cut. | | RM | 45-46 | | 26704 | 9,5 | |
| | | | RM | 50-46 | | 26705 | 10,7 | |
| | | | RM | 60-46 | | 26706 | 13,6 | |
| | | | RM | 80-46 | | 26708 | 16,8 | |
| | | | RM | 90-46 | | 26709 | 18,1 | |
| | | | RM | 100-46 | | 26710 | 19 | |
| | | | RM | 120-46 | | 26702 | 20,9 | |
| No image | Anti-slip mat, anthracite for corner base units as carousel units 2 pieces, fits models UEK*/-X and UEDK*/-X/-M | | RM-UEK | 80 | | 29240 | 38 | |
| | | | RM-UEK | 90 | | 29241 | 54 | |
| | as above, however 2 pieces, fits models UETK*/-X, UEDTK*/-X and NUETK | | RM-UETK | 80 | | 29304 | 35 | |
| | | | RM-UETK | 90 | | 29262 | 35 | |
| No image | Anti-slip mat, anthracite for chamfered corner base units as carousel units 2 pieces, fits models UEDT*/-X/-M and UET*/-X | | RM-UED | 80 | | 29308 | 35 | |
| | | | RM-UED | 90 | | 29309 | 35 | |
| No image | Anti-slip mat, anthracite for corner base units 2 pieces, fits models UEBD*/-X, UEDBD*/-X/-M and NUEBD <i>RM-UE120 suitable for 1000 mm and 1200 mm width!</i> | | RM-UE | 80 | | 29244 | 20 | |
| | | | RM-UE | 90 | | 29245 | 25 | |
| | | | RM-UE | 120 | | 29246 | 34 | |

| Base unit accessories | | | Abbreviation | | Order No. | Points |
|---|--|---------|--------------|---|-----------|--------|
| | | | Width in cm | | | |
|  | Anti-slip mats, anthracite for corner units and corner highboards with swivel pull-out 2 pieces, fits models UEDSA*/-X/-M, UESA*/-X, UEV(S)A*(-X), NUESA*/-X and HESA*/-X | RM-UESA | 90-45 | R | 29250 | 26 |
| | | RM-UESA | 90-45 | L | 29251 | 26 |
| | | RM-UESA | 100-50 | R | 29252 | 37 |
| | | RM-UESA | 100-50 | L | 29253 | 37 |
| | | RM-UESA | 100-60 | R | 29254 | 37 |
| | | RM-UESA | 100-60 | L | 29255 | 37 |
|  | Anti-slip mats, anthracite for pull-out unit 2 pieces, fits models UAMD*/-X, UAM*/-X and NUAM30/-X | RM-UAM | 20 | | 29301 | 12 |
| | | RM-UAM | 30 | | 29269 | 15 |
|  | Anti-slip mats, anthracite for pull-out units, chamfered 2 pieces, fits models UZAD30 and UZA30 | RM-UZA | | R | 29302 | 12 |
| | | RM-UZA | | L | 29303 | 12 |

Accessories for base units



| | | | | | | |
|---|--|---|-----------------------------------|------------------------|----------------|------------|
|   | Sensomatic opening system for drawers and pull-outs for electro-mechanical opening of drawers and front pull-outs, comprised of: drive unit, connection cable, power supply unit, power cable, spring-loaded bumper for front, mounting screws and assembly instructions | up to 600 mm width from 800 mm width | SOS-SET SOS2-SET | -F -F | 5238 5241 | 391 632 |
| | Sockets - model F | | | | | |
| | Sockets - model E | | SOS-SET SOS2-SET | -E -E | 51238 51241 | 391 632 |
| | Sockets - model G | | SOS-SET SOS2-SET | -G -G | 52238 52241 | 423 663 |
| | Sockets - model I | | SOS-SET SOS2-SET | -I -I | 57238 57241 | 423 663 |
| | Sockets - model J | | SOS-SET SOS2-SET | -J -J | 53238 53241 | 420 656 |
| | Sockets - model K | | SOS-SET SOS2-SET | -K -K | 54238 54241 | 422 661 |
| | Sockets - model L | | SOS-SET SOS2-SET | -L -L | 55238 55241 | 435 676 |
| | Sockets - model B <i>One opening system is required per drawer or pull-out.</i> <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i> | | SOS-SET SOS2-SET | -B -B | 56238 56241 | 435 673 |
|  | SpaceFlexx Flexible organisation system for storage canisters, for use from 600 mm width, anthracite / chrome, height 130 mm, fits drawer depth upwards of 472 mm, flexible divider nesttex® adjusts to fit stored goods, nesttex® is safe for the washing machine, no tipping over or storage canisters falling out. <i>Can be used with front pull-out widths upwards of 600 mm and frame depths of 500 mm.</i> | | SPFLEXx | | 26100 | 95 |

| Base unit accessories | | | Abbreviation | Width in cm | Order No. | Points |
|-----------------------|---|--|--------------|-------------|-----------|--------|
| | | | | | | |
| |  <p>Set of 4 wooden trays for base units with tablar pull-outs (URTA*) solid wood design in oak, height: 53 mm consisting of: 1 tray 456 x 152 mm 3 trays 228 x 152 mm</p> | | ERTA | | 39693 | 123 |
| |  <p>Towel rail, matt chromium-plated 3-part telescopic towel rail, all metal on ball bearings rails, suitable for visible fitting to open shelf units or to side panels. 40 mm high, 490 mm depth, 890 mm when extended, width 145 mm.</p> | | HT-CR | | 4394 | 55 |
| |  <p>Organiser system „Pantry Box“ includes plastic rack, suitable for wiping, with drip and ventilation slots and carrying caddy height: 230 mm, depth: 491 mm white plastic components <i>LED unit interior light LSID is not possible with 285 mm high pull-outs in conjunction with the Pantry Box!</i></p> | | UPBOX | 60 | 9413 | 274 |
| USA CAN |  <p>Electric multi slicer Ritter multi-slicer AES 62 SR, metal design in silver metallic, for drawers from 500 mm width and side depth of 561 mm, food is cut from the right, holding bracket for finger protection and food remnant holder, infinitely adjustable slice thickness up to approx. 14 mm, safety switch for intermittent and continuous operation, stainless steel food collecting tray <i>Model with country-dependent socket. Available in countries of the EU/EEA, with the exception of socket model G and Belgium. An updated overview of additional country approvals can be found in the nobilia Extranet. An overview of sockets can be found on the rear side of chapter index 2 for worktop décors.</i></p> | | EAS | | 4448 | 571 |
| |  <p>Protection strip for worktop above dishwasher to prevent damage to worktop by condensation. Silver anodized, self-adhesive dimensions: w x d = 700 x 80 mm.</p> | | SLGSP | | 9448 | 26 |
| NEW |  <p>Crossbar reinforcement made of metal Metal profile for decreasing sagging or for additional reinforcement of worktops and top shelves of 10 to 16 mm thickness. Suitable for base units and sink units of 800 mm width or more. For installation on site.</p> | | TRAVM | 80 | 47478 | 50 |
| | | | TRAVM | 90 | 47479 | 51 |
| | | | TRAVM | 100 | 47480 | 55 |
| | | | TRAVM | 120 | 47482 | 57 |

| Base unit accessories | | Abbreviation | Width in cm | Order No. | Points |
|--|---|--|--|--|--|
| | | | | | |
|  | Latch for simultaneous opening of internal drawers suitable for pull-out units with internal drawers | MITIS | | 26730 | 22 |
| | | | | | |
|  | Lid and towel holder, stainless steel finish 2 pieces with mounting plate, 2 knurled screws drill spacing: 392 mm dimensions: 457 x 40 mm, 12 mm Ø | DTH | | 9412 | 20 |
|  | Plinth drawer drawer depth of 400 mm, for mounting beneath base units and tall units on site, no special units, such as e.g. all corner units, plinth panel with bar handle, stainless steel coloured. Plinth drawer can only be installed with a plinth height of 150 mm and 200 mm and a side depth of 561 mm. <u>Do not plan beneath appliance housing units,</u> since appliance ventilation is provided through the plinth panel. Planning in freestanding runs requires continuous back panel cladding, rear plinth panel cannot be mounted. <i>Plan 2 plinth drawers for 2-door base units.</i> <i>SSKN40 is not suitable for use with 400 mm wide larder units</i> <i>HA40*!</i> <i>Cannot be combined with Cargo HC* and HDC*.</i> <i>If planned at end of run, an upright panel is necessary!</i> | SSKN 40 SSKN 45 SSKN 50 SSKN 60 SSKN 80 SSKN 90 SSKN 100 SSKN 120 | 40 45 50 60 80 90 100 120 | 3424 3427 3425 3426 3428 3429 3421 3422 | 117 118 118 123 134 136 142 146 |
|  | Fold-out step ladder / Stepfix made of aluminium, Black, 2 steps with safety lock, easy folding mechanism, includes universal holder for side mounting in base or tall units upwards of 461 mm side depth. step height: 167 mm / 350 mm, dimensions when folded: W x H x D = 402 x 463 x 98 mm <i>Can be mounted in drawers upwards of 600 mm width with</i> <i>frame depth of 500 mm.</i> <i>Cannot be mounted in plinth drawers!</i> <i>Maximum load 150 kg!</i> | TSA | | 3414 | 114 |
|  | 135° plastic profile, grey 1100 mm high, to join carcass panelling required for 135° corner joints of carcass sides without mitre cut (e.g. for back panelling made of carcass material) | RKZ | | 9229 | 13 |

| Sink unit accessories | | Abbreviation | | Width in cm | Order No. | Points |
|---|---|--------------|-----|-------------|-----------|--------|
| | | | | | | |
| Accessories for sink units | | | | | | |
|  | Moisture protection sheet aluminium sheet, serrated, for sink base units, cannot be used with front pull-outs, fits only for a side depth of 561 mm FB90: also fits corner sink units SPUE(D)90-45(-X) and NSPUE90-45(-X) FB100: also fits corner sink units SPUE(D)100-50(-X) and NSPUE100-50(-X) | FB | 40 | | 4212 | 25 |
| | | FB | 45 | | 4213 | 25 |
| | | FB | 50 | | 4214 | 25 |
| | | FB | 60 | | 4215 | 26 |
| | | FB | 80 | | 4216 | 26 |
| | | FB | 90 | | 4217 | 34 |
| | | FB | 100 | | 4218 | 35 |
| | | FB | 120 | | 4219 | 37 |
| | Moisture protection panel as above, however, fits the following corner sink units FBE90R: fits SPUE(D)90-40(-X) and NSPUE90-40(-X), right version FBE90L: fits SPUE(D)90-40(-X) and NSPUE90-40(-X), left version FBE100R: fits SPUE(D)100-60(-X) and NSPUE100-60(-X), right version FBE100L: fits SPUE(D)100-60(-X) and NSPUE100-60(-X), left version | FBE | 90 | R | 7185 | 35 |
| | | FBE | 90 | L | 7186 | 35 |
| | | FBE | 100 | R | 7187 | 37 |
| | | FBE | 100 | L | 7188 | 37 |
|  | Moisture protection shelf aluminium sheet, serrated, for chamfered corner sink unit SPUE(D)90/105(-X) <i>Can only be factory-fitted into the corner unit.</i> | FBE | 90 | | 7035 | 67 |
| | | FBE | 105 | | 7036 | 70 |
|  | Waterproof mat plastic, slate grey, for sink base units, not for use with front pull-outs, fits only side depth of 561 mm <i>Not possible in conjunction with hose and cable feed-through SKD or with opening support mechanism Libero AOUL.</i> | WSMS | 40 | | 39901 | 31 |
| | | WSMS | 45 | | 39902 | 31 |
| | | WSMS | 50 | | 39903 | 31 |
| | | WSMS | 60 | | 39904 | 31 |
| | | WSMS | 80 | | 39905 | 32 |
| | | WSMS | 90 | | 39906 | 41 |
| | | WSMS | 100 | | 39907 | 42 |
| | | WSMS | 120 | | 39908 | 45 |
|  | Hose and cable lead-through white plastic, 2 piece, 165 x 165 mm, for sink base units. Neatly covers the cut-outs, including 35 x 15 mm fastening screws and template | SKD | | | 7037 | 10 |
|  | Hose deflector for pull-out mixer taps to be fitted with two screws, creates a spacing between hand spray hose and waste separation and organiser system | SA-MB | | | 7020 | 23 |




Sink unit accessories

| Sink unit accessories | | Abbreviation | | Order No. | Points |
|---|--|--------------|--|-----------|--------|
| | | Width in cm | | | |
|  | Cleaning products pull-out 2 compartments, metal colour powder coating, dimensions: h x w x d = 420 x 117 x 470 mm, installation on site to the side panel (door hinged side) | AS4331 | | 4331 | 86 |
|  | Cleaning products pull-out „Vario Line“ aluminium, back panel coated silver grey, 3 trays and 3 hooks, for mounting to the side panel on site, h x w x d = 485 x 158 x 484 mm | PMA | | 4416 | 194 |

Waste collecting systems

| | | Abbreviation | Order No. | Points |
|---|--|--------------|-----------|--------|
| Waste collecting systems (fitted on bottom shelf behind hinged door) | | | | |
|  | Built-in waste collector „Solo“ plastic, slate grey, with full pull-out, capacity: 20 litres, Built-in dimensions: h x w x d = 396 x 245 x 427 mm To be fitted on site onto the bottom shelf. <i>Can be built-in upwards of 300 mm door width.</i> <i>Take sink syphon into account and plan space saving connector 021!</i> | AS9430 | 9430 | 66 |
|  | Built-in waste collector „Tandem“ as a full pull-out with 2 bins for ecological waste separation, with mechanical pull-out and lid lifting system, dimensions: h x w x d = 415 x 250 x 480 mm. Volume: 2 x 15 l. To be fitted on site onto the bottom shelf. <i>Can be built-in upwards of 300 mm door width.</i> <i>Take sink syphon into account and plan space saving connector 021!</i> | AS4311 | 4311 | 111 |
|  | Built-in waste collector Bio-Trio 30 DT With 3 plastic bins, Orion grey, for odourless, ecological waste separation, plastic parts Orion grey, capacity: 3 x 10 litres, incl. bio lid, H x W x D = 385 x 254 x 475 mm To be fitted on site onto the bottom shelf. <i>Can be built-in upwards of 300 mm door width.</i> <i>Take sink syphon into account and plan space saving connector 021!</i> | AS4753 | 4753 | 111 |
|  | Built-in waste collector „space saving Tandem“ sorting in 3 bins: volume: 1 x 18 l, 2 x 8.5 l, 1 additional bio lid, H x W x D = 320 x 336 x 471 mm <i>Can be built-in upwards of 400 mm door width.</i> <i>Take sink syphon into account and plan space saving connector 021!</i> | AS4742 | 4742 | 126 |
|  | Built-in waste collector „space saving Tandem S“ sorting in 3 bins: volume: 1 x 12 l, 2 x 8.5 l, 1 additional bio lid, H x W x D = 347 x 434 x 330 mm <i>Can be built-in upwards of 500 mm door width.</i> <i>Take sink syphon into account and plan space saving connector 021!</i> | AS9431 | 9431 | 124 |
|  | Waste collector 40 DT 2 plastic bins, Orion grey, for ecological waste separation, capacity: 2 x 16 l, H x W x D = 320 x 338 x 475 mm To be fitted on site onto the bottom shelf. <i>Can be built-in upwards of 400 mm door width.</i> <i>Take sink syphon into account and plan space saving connector 021!</i> | AS4752 | 4752 | 111 |

Waste collecting systems

| | | Abbreviation | Order No. | Points |
|---|--|--------------|-----------|--------|
| Waste collecting systems (fitted on shelf behind hinged door, diagonal) | | | | |
|  | Built-in waste collector „Rondo“, revolving 3 plastic containers as full pull-out, volume: 1 x 18 litres, 2 x 8.5 litres, multi-purpose bucket 12 litre with perforated lid, 2 lateral trays, additional bio lid for a 8.5 l bucket. To be fitted on site onto the unit bottom shelf. Built-in dimensions: h x w x d = 341 x 345 x 700 mm <i>Can be fitted into chamfered base units from 900 mm width on!</i> <i>Take sink syphon into account and plan space saving connector 021!</i> | AS4378 | 4378 | 244 |
| | | | | |
| Waste collecting systems (pull-outs, fitted to the front) | | | | |
|  | Built-in waste collector „Syncro“ Fully synchronised pull-out rails, with over extension runner, cushioned and covered, metal and plastic parts in slate grey. H x d: 424 x 400 mm Contents: 2 x 18 litres <i>Matching sink units: SPUA(D)45(-X) / SPUA45(-M) / NSPUAL45(-X)!</i> | AS3550 | 3550 | 277 |
| | as above, however, with the following contents: 1 x 18 l, 2 x 13 l, 1 additional bio lid <i>Matching sink units: SPUA(D)50(-X) / SPUA50(-M) / NSPUAL50(-X)!</i> | AS3551 | 3551 | 293 |
| | as above, however, with the following contents: 2 x 28 l <i>Matching sink units: SPUA(D)60(-X) / SPUA60(-M) / NSPUAL60(-X)!</i> | AS3552 | 3552 | 293 |
| | as above, however, with the following contents: 1 x 28 l, 2 x 13 l, 1 additional bio lid <i>Matching sink units: SPUA(D)60(-X) / SPUA60(-M) / NSPUAL60(-X)!</i> | AS3553 | 3553 | 296 |
|  | Built-in waste collector „Euro-ZK Boxx“ 1 drawer with adjustable rear panel, insert tray, contents: 1 x 38 litres for 35- or 17 litre waste bags subject to charges, h x d: 457 x 347 mm <i>Matching sink units: SPUA(D)K-BW45(-X) and NSPUAK-BW45(-X)!</i> | AS9765 | 9765 | 171 |
| | as above <i>Matching sink units: SPUA(D)K-BW50(-X) and NSPUAK-BW50(-X)!</i> | AS9766 | 9766 | 171 |
| | as above, however with additional bio container <i>Matching sink units: SPUA(D)K-BW60(-X) and NSPUAK-BW60(-X)!</i> | AS9767 | 9767 | 187 |
| | as above, however with additional auxiliary container 16 l and bio container, h x d: 457 x 370 mm <i>Matching sink units: SPUA(D)-BW60(-X) and NSPUA-BW60(-X)!</i> | AS9768 | 9768 | 209 |

| Waste collecting systems | | Abbreviation | Order No. | Points |
|---|--|--------------|-----------|--------|
| Waste collecting systems (fitted to hinged door) | | | | |
|  | <p>Built-in waste collector, silver-coloured made of metal with removable plastic waste bins, lid and rims are black plastic, right-hand side or left-hand side mounting, no load on door hinges, 13 l capacity. Lid automatically lifts upon opening door. Dimensions: h x w x d = 470 x 340 x 285 mm Please note: Only mount waste collector on side wall with door hinge or on centre stile with corner sink units. <i>Can be built-in upwards of 400 mm door width.</i></p> | AS9441 | 9441 | 38 |
|  | <p>Built-in waste collector flat design, 19 l volume container. Installation dimensions: h x w x d = 470 x 410 x 210 mm. Please note! Waste container only to be fitted to the side wall with door fittings, or to the centre post of corner sink units. In case of corner sink units, the adapter, order No. 9465 (to be fitted to the centre post) is required. <i>Can be built-in upwards of 450 mm door width.</i></p> | AS9449 | 9449 | 63 |
|  | <p>Econtainer Junior, double waste collector flat design, with two 10 l and 19 l bins. Dimensions: h x w x d = 470 x 460 x 400 mm. Please note! Waste connector can only be fitted to the side panel with door fittings, or to the centre post of corner sink units. In case of corner sink units the adapter, order No. 9465 (to be fitted to the centre post) is required. <i>Can be built-in upwards of 500 mm door width.</i> <i>Front bin fits underneath the sink connections, order space saving adapter 021.</i></p> | AS9440 | 9440 | 115 |
|  | <p>Built-in waste collector „Euro Flexx“ 35 l large container with cover frame and bin liner clamping system, fits 1 x 35 l or 2 x 17 l, lid with indentation can be mounted on the right or left H x W x D = 499 x 370 x 356 mm <i>Can be built-in upwards of 450 mm door width.</i></p> | AS9450 | 9450 | 133 |
|  | <p>Adapter for corner sink base units with centre post, galvanised suitable for all Econtainers and 9449 / 9440 waste collectors. Please note! Observe door widths to be sufficient to allow the installation of waste collectors. Screw the adapter to the centre post, and then fasten the waste collector holder.</p> | ASZ9465 | 9465 | 13 |

254




An up-to-date overview of additional approved countries can be found in the Nominal Extract.
An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.

Country approval for electrified accessories


Electrified accessories / furniture items are generally approved for the EU or European Economic Area EEA (= EU + Norway, Liechtenstein, Iceland).

Sockets overview




Sockets - model F

for Bulgaria, Germany, Estonia, Finland, Greece, Iceland, Croatia, Latvia, Lithuania, Luxembourg, Netherlands, Norway, Austria, Portugal, Romania, Sweden, Slovenia, Spain, Hungary




Sockets - model E

for Belgium, France, Poland, Slovakia, the Czech Republic, French Guiana, French Polynesia, New Caledonia, Réunion




Sockets - model G

for Great Britain, Ireland, Malta, Cyprus




Sockets - model K

for Denmark




Sockets - model L

for Italy



Sockets - model I


for Australia, New Zealand



Sockets - model J

for Liechtenstein, Switzerland







16A - T23





Sockets - model B

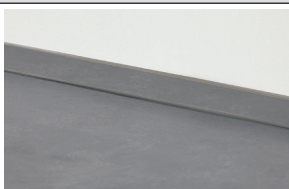for Canada, Taiwan, USA

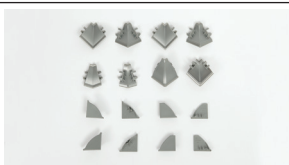An updated overview of additional country approvals can be found in the nobilia Extranet.



| Worktop accessories | | | | Abbreviation | | Width in cm | Order No. | Points |
|---|---|------------------------|---------|--------------|--|-------------|-----------|--------|
| | | | | | | | | |
| Upstands | | | | | | | | |
|  | Plastic upstand Top section with sealing lips, dimensions: 25 mm high, 25 mm deep, delivered as strand material. Available in all worktop designs, see chapter 2! Also available in: 014 Stainless steel appearance | Length 2000 mm | WAP | 200 | | 4082 | 16 | |
| | | Length 4000 mm | WAP | 400 | | 4084 | 22 | |
| | | Special length 5000 mm | WAP | 500 | | 4085 | 53 | |
| | | | | | | | | |
|  | WAP accessory bag matches the plastic upstands WAP <u>consisting of:</u> 4 x interior corner 90° 2 x interior corner 135° 2 x exterior corner 90° 2 x sets of end caps | | WAP-Z | | | 7928 | 13 | |
| No image | Heat shield for WAP brushed stainless steel, 700 mm long, 32 mm high, to be glued on to the upstand WAP <i>Note: Please use for gas hobs!</i> | | WAP-HS | | | 4459 | 15 | |
|  | Upstands for continuous planning with niche cladding 2 sectional plastic profile with sealing lip, incl. vertical sealing profile, dimensions: 25 mm high, 25 mm deep Delivered as strand material. Available in: 014 Stainless steel appearance, 010 Black <i>Bottom profile adds 4 mm to the worktop.</i> | Length 2000 mm | WAPN | 200 | | 3942 | 25 | |
| | | Length 4000 mm | WAPN | 400 | | 3944 | 47 | |
| | | Special length 5000 mm | WAPN | 500 | | 3945 | 85 | |
| | | | | | | | | |
|  | WAPN accessory bag matches the plastic upstands WAPN <u>consisting of:</u> 4 x interior corner 90° / 2 x interior corner 135° 2 x exterior corner 90° 2 x set of end caps for WAPN 2 x set of end caps for niche cladding Available in: 014 Stainless steel appearance, 010 Black | | WAPN-Z | | | 3940 | 15 | |
| No image | Heat shield for WAPN brushed stainless steel, 700 mm long, 32 mm high, to be glued on to the upstand WAPN <i>Note: Please use for gas hobs!</i> | | WAPN-HS | | | 3972 | 20 | |
|  | Niche end profile aluminium profile, 2-piece, for niche claddings, incl. 1 set of end caps (left / right), screws and dowels Available in: 014 Stainless steel appearance, 010 Black <i>The profile NKPA* adds 16,5 mm.</i> | Length 2000 mm | NKPA | 200 | | 9342 | 51 | |
| | | Length 4000 mm | NKPA | 400 | | 9344 | 89 | |
|  | 1 set of end caps matching aluminium profile for niche cladding NKPA Available in: 014 Stainless steel appearance, 010 Black | | NKPA-EK | | | 9349 | 18 | |

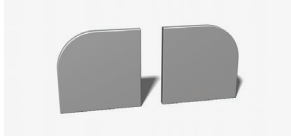


| Worktop accessories | | | | Abbreviation | | Order No. | Points |
|--|---|----------------|---------|--------------|-------|-----------|--------|
| | | | | Width in cm | | | |
|  | Niche connecting profile aluminium profile, 2-piece, for niche claddings, incl. 1 set of end caps (left / right), screws and dowels | Length 2000 mm | NKPV | 200 | 9365 | 57 | |
| | | Length 4000 mm | NKPV | 400 | 9367 | 96 | |
| <div>Available in: 014 Stainless steel appearance, 010 Black</div> <div>The profile NKPV* adds 16,5 mm.</div> <div>For railing system Linero-MosaiQ, also order LED light profile NKPL.</div> | | | | | | | |
|  | 1 set of end caps matching aluminium profile for niche cladding NKPV | | NKPV-EK | | 9369 | 19 | |
| <div>Available in: 014 Stainless steel appearance, 010 Black</div> | | | | | | | |
|  | LED light profile for LINERO MosaiQ aluminium profile with integrated LED light strip, niche end profile and / or connecting profile, incl. 2 sets of end caps (left / right), screws and dowels Permitted for the following niche claddings: NV*, NVH*, NVM*, NVG120 Permitted for designs with the following profiles: WAPN, NPUK, NKPU, NKPA, NKPV | | NKPL | | 9394 | 55 | |
| <div>Energy efficiency rating: G, with Emotion technology</div> <div>12 watts per running metre</div> <div>Profile length: 100 - 4000 mm, including 2000 mm connection cable to power supply set, upwards of 3000 mm profile lengths will be supplied with 2 connection cables and 2000 mm extension cable.</div> <div>Price per started 100 mm.</div> <div>Available in: 014 Stainless steel appearance, 010 Black</div> <div>The profile NKPL adds 16.5 mm.</div> <div>The end caps add 2 mm per piece.</div> <div>Please specify the total width of the light profile and the width dimension of the individual end and/or connecting profiles. The connecting profile can be used to horizontally join niche claddings.</div> <div>Cannot be planned with Slim Line cooker hoods.</div> <div>Attention: The niche must be divided.</div> <div>LED starter and follow-up sets are not included in the scope of delivery - refer to accessories list, page Z 4.13.</div> | | | | | | | |
|  | Niche profile on bottom 2-piece aluminium profile with sealing profile for niche cladding and back panelling or as upstand, dimensions: 17 mm high, 20 mm deep | Length 2000 mm | NKPU | 200 | 39570 | 42 | |
| | | Length 4000 mm | NKPU | 400 | 39571 | 73 | |
| <div>Available in: 014 Stainless steel appearance, 010 Black</div> <div>The profile NKPU* adds 4 mm.</div> | | | | | | | |
|  | Niche profile on top aluminium profile, stainless steel appearance for niche cladding incl. 1 set of end caps (left-hand side / right-hand side), dimensions: 16 mm high, 16 mm deep | Length 2000 mm | NKPO | 200 | 9573 | 35 | |
| | | Length 4000 mm | NKPO | 400 | 9574 | 61 | |
| <div>The profile NKPO* adds 2 mm.</div> | | | | | | | |


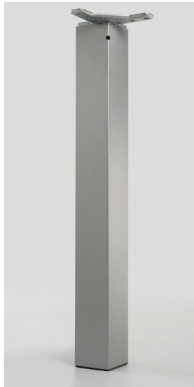


| Worktop accessories | | | Abbreviation | Width in cm | Order No. | Points |
|---------------------|--|--|-------------------|-------------------|----------------------|----------------|
| | | | | | | |
| |  <p>NKP accessory bag matches upstand NKPU consisting of: 4 x interior corner 90° / 2 x interior corner 135° 2 x exterior corner 90° 2 x set of end caps for upstand 1 x set of end caps for niche cladding</p> <p>Available in: 014 Stainless steel appearance, 010 Black</p> | | NKP-Z | | 9347 | 22 |
| |  <p>1 set of end caps matching aluminium profile for niche cladding NKPO</p> | | NKP-EK | | 9579 | 16 |
| |  <p>Plastic top profile in stainless steel appearance for niche cladding incl. 1 set of end caps (left-hand side / right-hand side) <i>The profile NVP* adds 2 mm.</i></p> | Length 2000 mm Length 4000 mm Special length 5000 mm | NVP NVP NVP | 200 400 500 | 3946 3947 3948 | 19 25 58 |
| |  <p>1 set of end caps matching plastic profile for niche cladding NVP</p> | | NVP-EK | | 3949 | 10 |
| Support consoles | | | | | | |
| |  <p>Round support console, straight aluminium in stainless steel appearance, for mounting breakfast bars to the worktop, 190 mm high, 45 mm Ø</p> <p>Maximum breakfast bar depth: 500 mm, Maximum breakfast bar load capacity: 50 kg/m² Breakfast bar widths up to 1200 mm require 2 support consoles, add 1 more for every additional 600 mm. <i>Not suitable for mounting on Slim Line, quartz and Xtra Ceramic worktops.</i></p> | | STK-R | | 44030 | 64 |
| |  <p>Right-angled support console, straight aluminium, for installation of breakfast bars on the worktop, 190 mm high, W x D = 50 x 50 mm</p> <p>Available in: 014 Stainless steel appearance, 010 Black</p> <p>Maximum breakfast bar depth: 500 mm, Maximum breakfast bar load capacity: 50 kg/m² Breakfast bar widths up to 1200 mm require 2 support consoles, add 1 more for every additional 600 mm. <i>Not suitable for mounting on Slim Line, quartz and Xtra Ceramic worktops.</i></p> | | STK-E | | 44032 | 39 |
| |  <p>Support console BKS, slanted made of aluminium in Stainless steel appearance, 45 mm Ø, 190 mm high, with base plate, plan at a distance of approx. 600 to 800 mm, for mounting on breakfast bars made of worktop material on the worktop</p> <p>Maximum breakfast bar depth: 500 mm, Maximum breakfast bar load capacity: 50 kg/m² Breakfast bar widths up to 1200 mm require 2 support consoles, add 1 more for every additional 600 mm. <i>Not suitable for mounting on Slim Line, quartz and Xtra Ceramic worktops.</i></p> | | STK-NI | | 44031 | 110 |

| Worktop accessories | | Abbreviation | Width in cm | Order No. | Points |
|---------------------|--|--------------|-------------|-----------|--------|
| | | | | | |
| |  <p>Right-angled support console, slanted made of aluminium in Stainless steel appearance, for mounting breakfast bars made of worktop material on the worktop, 190 mm high, W x D = 50 x 50 mm</p> <p>Maximum breakfast bar depth: 500 mm, Maximum breakfast bar load capacity: 50 kg/m² Breakfast bar widths up to 1200 mm require 2 support consoles, add 1 more for every additional 600 mm.</p> <p><i>Not suitable for mounting on Slim Line, quartz and Xtra Ceramic worktops.</i></p> | STK-ES | | 44034 | 82 |
| |  <p>Round support console, slanted aluminium in stainless steel appearance for side installation, 180 mm high, 45 mm Ø, inclination: 45°</p> <p>Maximum breakfast bar depth: 500 mm, Maximum breakfast bar load capacity: 50 kg/m² Breakfast bar widths up to 1200 mm require 2 support consoles, add 1 more for every additional 600 mm.</p> <p><i>Not suitable for mounting on Slim Line, quartz and Xtra Ceramic worktops.</i></p> | STK-S 45 | | 4024 | 118 |
| |  <p>Support console SLIM LINE, slanted made of flat steel in Stainless steel appearance, for mounting breakfast bars made of worktop material on the worktop 172 mm high, W x D = 10 x 60 mm</p> <p>Maximum breakfast bar depth: 500 mm, Maximum breakfast bar load capacity: 50 kg/m² Breakfast bar widths up to 1200 mm require 2 support consoles, add 1 more for every additional 600 mm.</p> <p><i>Also suitable for mounting on Slim Line worktops.</i></p> <p><i>Not suitable for mounting on quartz and Xtra Ceramic worktops.</i></p> | STK-SL | | 44029 | 86 |
| |  <p>Support angle aluminium, 250 mm wide, for fitting worktops to wall, or to fasten breakfast bars to base units or back panels. 40 x 40 mm legs, including fixing screws</p> <p>Maximum breakfast bar depth: 500 mm, Maximum breakfast bar load capacity: 50 kg/m² Breakfast bar widths up to 1200 mm require 2 support consoles, add 1 more for every additional 600 mm.</p> <p><i>Not suitable for mounting on Slim Line, quartz and Xtra Ceramic worktops.</i></p> | STW | | 4032 | 13 |
| |  <p>Right-angled support console BSG, straight made of steel in Stainless steel appearance, for mounting breakfast bars made of worktop material or the worktop, 190 mm high, W x D = 70 x 70 mm</p> <p>Maximum breakfast bar depth: 500 mm, Maximum breakfast bar load capacity: 50 kg/m² Breakfast bar widths up to 1200 mm require 2 support consoles, add 1 more for every additional 600 mm.</p> <p><i>Not suitable for mounting on Slim Line, quartz and Xtra Ceramic worktops.</i></p> | STK-BSG | | 47070 | 73 |






Worktop accessories

| Worktop accessories | | Abbreviation | Width in cm | Order No. | Points |
|---|--|--------------|-------------|-----------|--------|
| | | | | | |
|  | Right-angled support console BSGC, straight with double socket with touch protection, made of steel in Stainless steel appearance, for mounting breakfast bars made of worktop material on the worktop, 190 mm high, W x D = 70 x 70 mm, 1900 mm power cable Maximum breakfast bar depth: 500 mm, Maximum breakfast bar load capacity: 50 kg/m² Breakfast bar widths up to 1200 mm require 2 support consoles, add 1 more for every additional 600 mm. Sockets - model F | STK-BSGC | -F | 47071 | 165 |
| | Sockets - model E | STK-BSGC | -E | 47072 | 165 |
| | Sockets - model G | STK-BSGC | -G | 47073 | 165 |
| | Sockets - model J without contact protection | STK-BSGC | -J | 47078 | 181 |
| | Sockets - model L | STK-BSGC | -L | 47075 | 165 |
| | Sockets - model K <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of the socket range can be found on the rear side of the chapter 2 index for worktop accessories. Not suitable for mounting on Slim Line, quartz and Xtra Ceramic worktops.</i> | STK-BSGC | -K | 47077 | 159 |
| | | | | | |
|  | Right-angled support console BSS, slanted made of steel in Stainless steel appearance, for mounting breakfast bars made of worktop material on the worktop, 190 mm high, W x D = 70 x 70 mm Maximum breakfast bar depth: 500 mm, Maximum breakfast bar load capacity: 50 kg/m² Breakfast bar widths up to 1200 mm require 2 support consoles, add 1 more for every additional 600 mm. <i>Not suitable for mounting on Slim Line, quartz and Xtra Ceramic worktops.</i> | STK-BSS | | 47080 | 73 |




| Worktop accessories | | | Abbreviation | | Order No. | Points |
|--|---|-------------|--------------|-------|-----------|--------|
| | | | Width in cm | | | |
|  | Right-angled support console BSSC, slanted with double socket with touch protection, made of steel in Stainless steel appearance, for mounting breakfast bars made of worktop material on the worktop, 190 mm high, W x D = 70 x 70 mm, 1900 mm power cable Maximum breakfast bar depth: 500 mm, Maximum breakfast bar load capacity: 50 kg/m² Breakfast bar widths up to 1200 mm require 2 support consoles, add 1 more for every additional 600 mm. Sockets - model F | STK-BSSC | -F | 47081 | 171 | |
| | Sockets - model E | STK-BSSC | -E | 47082 | 171 | |
| | Sockets - model G | STK-BSSC | -G | 47083 | 180 | |
| | Sockets - model J without contact protection | STK-BSSC | -J | 47088 | 180 | |
| | Sockets - model L | STK-BSSC | -L | 47085 | 171 | |
| | Sockets - model K <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i> <i>Not suitable for mounting on Slim Line, quartz and Xtra Ceramic worktops.</i> | STK-BSSC | -K | 47087 | 172 | |
| | | | | | | |
| Support legs and table frames | | | | | | |
|  | Support leg 60 mm Ø in stainless steel appearance, height adjustment + 30 m <i>Max. 1400 mm worktop overhang in relation to a wall or base unit for 38 APD/APN.</i> <i>Not suitable in combination with Slim Line, quartz and Xtra Ceramic worktops.</i> <i>Please note: Not suitable for construction of a separate, free-standing table, breakfast bar or other similar element!</i> | 720 mm high | SFED | 72 | 44072 | 34 |
| | | 820 mm high | SFED | 82 | 44082 | 34 |
| | | 870 mm high | SFED | 87 | 44087 | 35 |
| | | 892 mm high | SFED | 89 | 44089 | 37 |
| | | | | | | |
|  | Support leg round, variable in stainless steel appearance, variable height: 785 to 968 mm high, height adjustment + 183 mm. <i>Max. 1400 mm worktop overhang in relation to a wall or base unit for 38 APD/APN.</i> <i>Not suitable in combination with Slim Line, quartz and Xtra Ceramic worktops.</i> <i>Please note: Not suitable for construction of a separate, free-standing table, breakfast bar or other similar element!</i> | Ø 60 mm | SF-RV60 | | 44060 | 66 |
| | | Ø 90 mm | SF-RV90 | | 44090 | 108 |












| Worktop accessories | | | | Abbreviation | | Width in cm | Order No. | Points |
|---|--|---|-------------|--------------|-------|-------------|-----------|--------|
| | | | | | | | | |
|  | Support leg round 45 mm Ø in stainless steel appearance, height adjustment + 15 mm <i>Max. 1400 mm worktop overhang in relation to a wall or base unit for 38 APD/APN.</i> <i>Not suitable in combination with Slim Line, quartz and Xtra Ceramic worktops.</i> <i>Please note: Not suitable for construction of a separate, free-standing table, breakfast bar or other similar element!</i> | 720 mm high | SF-R | 72 | 4513 | 88 | | |
| | | 820 mm high | SF-R | 82 | 45003 | 79 | | |
| | | 870 mm high | SF-R | 87 | 45007 | 77 | | |
| | | 892 mm high | SF-R | 89 | 45009 | 80 | | |
| | | 1100 mm high | SF-R | 110 | 44045 | 91 | | |
| | | 1122 mm high | SF-R | 112 | 45012 | 86 | | |
|  | Support leg square height adjustment + 15 mm, w x d = 50 x 50 mm Available in: 014 Stainless steel appearance, 010 Black <i>Max. 1400 mm worktop overhang in relation to a wall or base unit for 38 APD/APN.</i> <i>Not suitable in combination with Slim Line, quartz and Xtra Ceramic worktops.</i> <i>Please note: Not suitable for construction of a separate, free-standing table, breakfast bar or other similar element!</i> | 720 mm high | SF-EA | 50 | -72 | 45471 | 41 | |
| | | 820 mm high | SF-EA | 50 | -82 | 45472 | 47 | |
| | | 870 mm high | SF-EA | 50 | -87 | 45473 | 50 | |
| | | 892 mm high | SF-EA | 50 | -89 | 45474 | 53 | |
| | | 1100 mm high | SF-EA | 50 | -110 | 45475 | 64 | |
| | | 1122 mm high | SF-EA | 50 | -112 | 45476 | 66 | |
| | as above, however with w x d = 80 x 80 mm Available in: 014 Stainless steel appearance | 720 mm high | SF-EA | 80 | -72 | 48405 | 88 | |
| | | 820 mm high | SF-EA | 80 | -82 | 48407 | 91 | |
| | | 870 mm high | SF-EA | 80 | -87 | 48408 | 96 | |
| | | 892 mm high | SF-EA | 80 | -89 | 48409 | 105 | |
| |  | Support leg square of wood in carcase colour , height adjustment -10 mm, + 20 mm, w x d = 80 x 80 mm <i>Max. 1400 mm worktop overhang in relation to a wall or base unit for 38 APD/APN.</i> <i>Not suitable in combination with Slim Line, quartz and Xtra Ceramic worktops.</i> <i>Please note: Not suitable for construction of a separate, free-standing table, breakfast bar or other similar element!</i> | 720 mm high | SF-EH | 80 | -72 | 33411 | 146 |
| | | | 790 mm high | SF-EH | 80 | -79 | 33412 | 146 |
| | | | 820 mm high | SF-EH | 80 | -82 | 33413 | 146 |
| | | | 870 mm high | SF-EH | 80 | -87 | 33414 | 146 |
| 892 mm high | | | SF-EH | 80 | -89 | 33415 | 177 | |
|  | Support leg SFE, square made of steel in stainless steel appearance, height adjustment + 15 mm, w x d = 70 x 70 mm <i>Max. 1400 mm worktop overhang in relation to a wall or base unit for 38 APD/APN.</i> <i>Not suitable in combination with Slim Line, quartz and Xtra Ceramic worktops.</i> <i>Please note: Not suitable for construction of a separate, free-standing table, breakfast bar or other similar element!</i> | 720 mm high | SF-SFE | 72 | 47410 | 121 | | |
| | | 870 mm high | SF-SFE | 87 | 47420 | 146 | | |
| | | 892 mm high | SF-SFE | 89 | 47430 | 150 | | |

Worktop accessories

| Worktop accessories | | | | Abbreviation | | Order No. | Points |
|---|--|--------------------------------|-----------|--------------|-------|-----------|--------|
| | | | | Width in cm | | | |
|  | Support leg SFEC, square with double socket with contact protection, made of steel in stainless steel appearance, height adjustment + 15 mm, w x d = 70 x 70 mm 1900 mm power supply cable Sockets - model F | 720 mm high | SF-SFEC72 | -F | 47411 | 206 | |
| | | 870 mm high | SF-SFEC87 | -F | 47421 | 244 | |
| | | 892 mm high | SF-SFEC89 | -F | 47431 | 247 | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | Sockets - model E | 720 mm high | SF-SFEC72 | -E | 47412 | 206 | |
| | | 870 mm high | SF-SFEC87 | -E | 47422 | 244 | |
| | | 892 mm high | SF-SFEC89 | -E | 47432 | 241 | |
| | Sockets - model G | 720 mm high | SF-SFEC72 | -G | 47413 | 222 | |
| | | 870 mm high | SF-SFEC87 | -G | 47423 | 261 | |
| | | 892 mm high | SF-SFEC89 | -G | 47433 | 272 | |
| | Sockets - model J without contact protection | 720 mm high | SF-SFEC72 | -J | 47418 | 226 | |
| | | 870 mm high | SF-SFEC87 | -J | 47428 | 267 | |
| | | 892 mm high | SF-SFEC89 | -J | 47438 | 286 | |
| Sockets - model L | 720 mm high | SF-SFEC72 | -L | 47415 | 222 | | |
| | 870 mm high | SF-SFEC87 | -L | 47425 | 261 | | |
| | 892 mm high | SF-SFEC89 | -L | 47435 | 272 | | |
| Sockets - model K <i>Max. 1400 mm worktop overhang in relation to a wall or base unit for 38 APD/APN.</i> <i>Not suitable in combination with Slim Line, quartz and Xtra Ceramic worktops.</i> <i>Attention: Not suitable for construction of a separate, free-standing table, breakfast bar or other similar element!</i> <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i> | 720 mm high | SF-SFEC72 | -K | 47417 | 213 | | |
| | 870 mm high | SF-SFEC87 | -K | 47427 | 253 | | |
| | 892 mm high | SF-SFEC89 | -K | 47437 | 272 | | |
|   | Table frame for worktops 720 mm high, 790 mm deep, 1490 mm - 2490 mm long, worktop overhang on all sides: min. 5 mm, max. 105 mm <i>Not suitable for combination with quartz and Xtra Ceramic worktops.</i> | 014 Stainless steel appearance | ATG-E | | 4100 | 493 | |
| | | | | | | | |
|   | Bench base for worktops 415 mm high, 430 mm deep, 1490 mm - 2490 mm long, worktop overhang on all sides: min. 5 mm, max. 105 mm <i>Not suitable for combination with quartz and Xtra Ceramic worktops.</i> | 014 Stainless steel appearance | ABG | | 4145 | 431 | |
| | | | | | | | |




| Worktop accessories | | | Abbreviation | | Order No. | Points | |
|--|---|--------------------------------|------------------------------|-------------------------|----------------------|----------------------------------|--------------------------|
| | | | Width in cm | | | | |
|   | Table frame for worktops 711 mm high, 800 mm deep, 1400 mm - 2000 mm long, worktop depth: 800 - 1000 mm, worktop width: 1400 - 2200 mm, worktop overhang: min. 87 mm, max. 187 mm <i>Not suitable for combination with quartz and Xtra Ceramic worktops.</i> <i>With a depth of 800 mm and a length of 1400 mm, the worktop is flush with the foot ends.</i> | 014 Stainless steel appearance | ATGT-E | | 4130 | 493 | |
| | | | | | | | |
|   | Table frame Otello for worktops black, 732 mm high, worktop overhang on all sides: min. 4 mm, max. 104 mm ATGO-S 90: 592 mm deep, 892 mm long worktop depth 600 - 800 mm, worktop width 900 - 1100 mm ATGO-S 150: 742 mm deep, 1492 mm long worktop depth 750 - 950 mm, worktop width 1500 - 1700 mm ATGO-S 180: 842 mm deep, 1792 mm long worktop depth 850 - 1050 mm, worktop width 1800 - 2000 mm ATGO-S 210: 942 mm deep, 2092 mm long worktop depth 950 - 1150 mm, worktop width 2100 - 2300 mm <i>Not suitable for combination with quartz and Xtra Ceramic worktops.</i> | Black | ATGO ATGO ATGO ATGO | 90 150 180 210 | -S -S -S -S | 40026 40027 40028 40029 | 393 420 432 441 |
| | | | | | | | |
|   | Table frame Otello for worktops alpine white, 732 mm high, worktop overhang on all sides: min. 4 mm, max. 104 mm ATGO-W 90: 592 mm deep, 892 mm long worktop depth 600 - 800 mm, worktop width 900 - 1100 mm ATGO-W 150: 742 mm deep, 1492 mm long worktop depth 750 - 950 mm, worktop width 1500 - 1700 mm ATGO-W 180: 842 mm deep, 1792 mm long worktop depth 850 - 1050 mm, worktop width 1800 - 2000 mm ATGO-W 210: 942 mm deep, 2092 mm long worktop depth 950 - 1150 mm, worktop width 2100 - 2300 mm <i>Not suitable for combination with quartz and Xtra Ceramic worktops.</i> | Alpine white | ATGO ATGO ATGO ATGO | 90 150 180 210 | -W -W -W -W | 40031 40032 40033 40034 | 393 420 432 441 |
| | | | | | | | |
|   | Table frame for worktops in stainless steel appearance, 720 mm high, worktop overhang on all sides: min. 4 mm, max. 104 mm ATGF90: 592 mm deep, 892 mm long worktop depth 600 - 800 mm, worktop width 900 - 1100 mm ATGF150: 742 mm deep, 1492 mm long worktop depth 750 - 950 mm, worktop width 1500 - 1700 mm ATGF180: 842 mm deep, 1792 mm long worktop depth 850 - 1050 mm, worktop width 1800 - 2000 mm ATGF210: 942 mm deep, 2092 mm long worktop depth 950 - 1150 mm, worktop width 2100 - 2300 mm <i>Not suitable for combination with quartz and Xtra Ceramic worktops.</i> | 014 Stainless steel appearance | ATGF ATGF ATGF ATGF | 90 150 180 210 | | 40009 40015 40018 40021 | 399 410 415 428 |
| | | | | | | | |

| Worktop accessories | | | | Abbreviation | | | | Points |
|--|---|--------------------------------|--------|--------------|-------------|-----|--|--------|
| | | | | | Width in cm | | | |
|   | Bench base for worktops in stainless steel appearance, 415 mm high, 442 mm deep, worktop overhang on all sides: min. 4 mm, max. 104 mm | 014 Stainless steel appearance | ABGF | 150 | 40215 | 352 | | |
| | ABGF150: 442 mm deep, 1492 mm long worktop depth 450 - 650 mm, worktop width 1500 - 1700 mm | | ABGF | 180 | 40218 | 361 | | |
| | ABGF180: 442 mm deep, 1792 mm long worktop depth 450 - 650 mm, worktop width 1800 - 2000 mm | | ABGF | 210 | 40221 | 374 | | |
| | ABGF210: 442 mm deep, 2092 mm long worktop depth 450 - 650 mm, worktop width 2100 - 2300 mm <i>Not suitable for combination with quartz and Xtra Ceramic worktops.</i> | | | | | | | |
|  | Table sled frame, steel as worktop end of run for island designs with max. 1400 mm worktop overhang distance to a wall or base unit, height adjustable + 20 mm | 870 mm high | ATK62 | 87 | 40881 | 425 | | |
| | | 870 mm high | ATK78 | 87 | 40882 | 444 | | |
| | | 870 mm high | ATK95 | 87 | 40889 | 451 | | |
| | | 870 mm high | ATK106 | 87 | 40884 | 483 | | |
| | | 870 mm high | ATK116 | 87 | 40885 | 496 | | |
| | Available in: 014 Stainless steel appearance, 010 Black | | | | | | | |
| | ATK62-87 / 89 = 617 mm deep, for one-sided islands with units of 561 mm side depth | | | | | | | |
| | ATK78-87 / 89 = 783 mm deep, for two-sided islands with LINE N units of 561 mm side depth and frame element of 180 mm side depth | | | | | | | |
| | ATK95-87 / 89 = 953 mm deep, for two-sided islands with units of 561 mm and 350 mm side depth | | | | | | | |
| | ATK106-87 / 89 = 1064 mm deep, for two-sided islands with units of 561 mm and 461 mm side depth | | | | | | | |
| | ATK116-87 / 89 = 1164 mm deep, for two-sided islands with two units of 561 mm side depth | | | | | | | |
| | ATK...-87 is for designs with a base unit height of 720 mm and plinth height of 150 mm | | | | | | | |
| | as above, however 892 mm high | 892 mm high | ATK62 | 89 | 40891 | 426 | | |
| | | 892 mm high | ATK78 | 89 | 40892 | 445 | | |
| | ATK...-89 is for designs with a base unit height of 792 mm and plinth height of 100 mm | 892 mm high | ATK95 | 89 | 40899 | 454 | | |
| | | 892 mm high | ATK106 | 89 | 40894 | 485 | | |
| | | 892 mm high | ATK116 | 89 | 40895 | 499 | | |
| | as above, however for table designs including wall covering | 720 mm high | ATK62 | 72 | 40871 | 412 | | |
| | | 720 mm high | ATK78 | 72 | 40872 | 431 | | |
| | <i>Not suitable for combination with Slim Line, quartz and Xtra Ceramic worktops.</i> | 720 mm high | ATK95 | 72 | 40879 | 439 | | |
| | <i>Please note: Not suitable for construction of a separate, free-standing table, breakfast bar or other similar element!</i> | 720 mm high | ATK106 | 72 | 40874 | 470 | | |
| | | 720 mm high | ATK116 | 72 | 40875 | 483 | | |

| Worktop accessories | | Abbreviation | Width in cm | Order No. | Points |
|---|---|--------------|-------------|-----------|--------|
| | | | | | |
| Trolley table | | | | | |
|  |  <p>Trolley table SERVE Steel frame, Black with 2 shelves made of 16 mm carcass material, with 4 castors, foldable dimensions: 555 mm x 822 mm x 555 mm, when folded: 555 mm x 822 mm x 100 mm <i>The storage shelf is available in all carcass colours and worktop décors of décor group 1, except 066 Slate décor and 366 Black textured.</i> <i>Not available in Xtra décors.</i> <i>The illustrated accessory items are not included in the scope of delivery.</i></p> | SERVE | | 7011 | 364 |
| |    | | | | |
|  |  <p>Bottle holder Material: Metal, Black incl. mounting bracket, also suitable for use with trolley table SERVE dimensions: 548 mm x 154 mm x 123 mm</p> | SERVE-FA | | 7023 | 137 |
|  |  <p>Multi-purpose shelf with lid Material: Metal, Black incl. mounting bracket, also suitable for use with trolley table SERVE dimensions: 548 mm x 54 mm x 150 mm</p> | SERVE-UA | | 7022 | 178 |
|  |  <p>Paper roll holder with towel hooks Material: Metal, Black incl. mounting bracket, also suitable for use with trolley table SERVE dimensions: 545 mm x 125 mm x 123 mm</p> | SERVE-PH | | 7021 | 104 |








| Worktop accessories | | Abbreviation | | Order No. | Points |
|--|--|--------------|--|-----------|--------|
| | | Width in cm | | | |
| Sockets | | | | | |
|  | Double socket, silver colour 2 safety sockets, 230 V, with sliding covers, with contact protection. For mounting on worktops. W = 322 mm, h = 66 mm, d = 56 mm, 2000 mm power supply cable | STD-F | | 33450 | 79 |
| | Sockets - model F | | | | |
| | Sockets - model E | STD-E | | 33451 | 83 |
| | Sockets - model G | STD-G | | 33454 | 83 |
| | Sockets - model L <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i> | STD-L | | 33458 | 83 |
|    | Built-in socket Twist Double socket, with contact protection, plastic housing, metal cover plate in stainless steel appearance or black lacquered. For mounting in worktops. Mounting hole: 105 mm diameter, 2000 mm power supply cable | TWIST-F | | 33447 | 147 |
| | Available in: 014 Stainless steel appearance, 010 Black | | | | |
| | Sockets - model F | | | | |
| | Sockets - model E | TWIST-E | | 33448 | 147 |
| | Sockets - model J <i>If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.</i> <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i> | TWIST-J | | 33449 | 175 |
|  | Double socket Corner Double socket, with contact protection, aluminium housing, stainless steel appearance. For mounting on worktops. W = 64 mm, h = 152 mm, d = 64 mm, 1800 mm power supply cable | CORN-F | | 33316 | 74 |
| | Sockets - model F | | | | |
| | Sockets - model E | CORN-E | | 33311 | 74 |
| | Sockets - model G | CORN-G | | 33312 | 76 |
| | Sockets - model J without contact protection | CORN-J | | 33317 | 105 |
| | Sockets - model L <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i> | CORN-L | | 33315 | 102 |

Worktop accessories





| | | Abbreviation | Width in cm | Order No. | Points |
|------------|---|--------------|-------------|-----------|--------|
| | | | | | |
| USA CAN |  <p>Double socket Power Corner with USB charger Double socket with contact protection and integrated USB charger for all common smartphones and tablets currently on the market. Charger: 2 x USB ports 5 V / 2.1 A / 10.5 W, Short-circuit and overload protection, SELV. Stainless steel housing, glass cover plate. For mounting on worktops. W = 113 mm, H = 274 mm, D = 69 mm 2000 mm power supply cable</p> <p>Glass cover plate available in: 053 Black high gloss, 085 Alpine white high gloss</p> <p>Sockets - model F</p> | PECK-F | | 33467 | 156 |
| | Sockets - model E | PECK-E | | 33468 | 156 |
| | Sockets - model J without contact protection | PECK-J | | 33469 | 177 |
| | | | | | |
| USA CAN |  <p>Triple socket Trio Triple socket with contact protection, housing of plastic, lid Black, W = 143 mm, H = 268 mm, D = 75 mm, 1800 mm power supply cable</p> <p>Cover available in: 014 Stainless steel appearance, 010 Black, 193 Alpine white</p> | TRIO-F | | 38901 | 107 |
| | Sockets - model E | TRIO-E | | 38902 | 108 |
| | Sockets - model G (Double socket with switch) | TRIO-G | | 38903 | 128 |
| | Sockets - model I-CN without contact protection | TRIO-I-CN | | 38904 | 193 |
| | Sockets - model B | TRIO-B | | 38905 | 188 |
| | | | | | |
| USA CAN |  <p>Triple socket Power Quad with USB charger Triple socket with contact protection and integrated USB charger for all common smartphones and tablets currently on the market. Charger: 2 x USB ports 5 V / 2.1 A / 10.5 W, Short-circuit and overload protection, SELV. Stainless steel housing, glass cover plate. For mounting on worktops. W = 170 mm, H = 200 mm, D = 72 mm 2000 mm power supply cable</p> <p>Glass cover plate available in: 053 Black high gloss, 085 Alpine white high gloss</p> <p>Sockets - model F</p> | PQUAD-F | | 33477 | 156 |
| | Sockets - model E | PQUAD-E | | 33478 | 156 |
| | Sockets - model J without contact protection | PQUAD-J | | 33479 | 185 |

Worktop accessories











| Worktop accessories | | Abbreviation | Width in cm | Order No. | Points |
|---|---|--------------|-------------|-----------|--------|
| | | | | | |
|  |  <p>EVOLine Square80 Socket with charging function via USB port model A, 5 V DC, charging current: 1000 mA, with contact protection, black plastic housing, cover in stainless steel appearance. The sliding cover in the Qi version is designed as an inductive charging station in accordance with the WPC 1.1 standard for wireless charging of suitable mobile phones. 3000 mm power supply cable. For mounting in worktops up to max. 50 mm thick</p> <p>Sockets - model F</p> | SQ80-F | | 33424 | 215 |
| | Sockets - model E | SQ80-E | | 33426 | 215 |
| | Sockets - model G | SQ80-G | | 33427 | 232 |
| | Sockets - model K <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i> | SQ80-K | | 33429 | 225 |
| | | | | | |
|  |  <p>Double socket Toki with USB charger and Bluetooth speaker Double socket with charging function via USB port model A, 5 V DC, charging current: 1000 mA, with contact protection, integrated loudspeaker, Bluetooth connection for audio playback, aluminium housing, stainless steel appearance, 1800 mm connection cable. For vertical mounting on worktops. W = 85 mm, H = 518 mm, D = 46 mm, incl. 19 mm adapter (for 538 mm recess for planning with tall- and dresser units in height 3)</p> <p>Sockets - model F</p> | TOKI-F | | 36206 | 203 |
| | Sockets - model E | TOKI-E | | 36207 | 206 |
| | Sockets - model G | TOKI-G | | 36208 | 206 |
| | Sockets - model L <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i> | TOKI-L | | 36209 | 206 |
| | | | | | |

| Worktop accessories | | Abbreviation | Width in cm | Order No. | Points |
|---|---|--------------|-------------|-----------|--------|
| | | | | | |
|  |  <p>EVoline Backflip with USB charger Retractable double socket with charging function via USB port model A, 5 V DC, charging current: 1000 mA, with contact protection, housing made of plastic, Black For mounting in worktops up to max. 50 mm thick. Cut-out dimensions: W = 215 mm, H = 53 mm, D = 88 mm, 2500 mm power supply cable</p> <p>Cover available in: 014 Stainless steel appearance, 010 Black</p> <p>Sockets - model F</p> | FLIP-F | | 36201 | 201 |
| |  <p>Sockets - model E</p> | FLIP-E | | 36202 | 171 |
| |  <p>Sockets - model G</p> | FLIP-G | | 36203 | 191 |
| | <p>Sockets - model J without contact protection</p> | FLIP-J | | 36204 | 171 |
| | <p>Sockets - model K <i>If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.</i> <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i></p> | FLIP-K | | 36205 | 171 |
|  |  <p>EVoline plug Extra flat safety plug with triple socket, without contact protection, 1500 mm power supply cable</p> <p>Sockets - model F</p> | PLUG-F | | 33480 | 38 |
| |  <p>as above, however with coupling box, with contact protection</p> <p>Sockets - model E <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i></p> | PLUG-E | | 33482 | 34 |

Worktop accessories

| Worktop accessories | | Abbreviation | Width in cm | Order No. | Points |
|---|---|--------------|-------------|-----------|--------|
| | | | | | |
|  |  <p>EVoline V port with USB charger Double socket with charging function via USB port model A, 5 V DC, charging current: 1000 mA, with contact protection, aluminium housing, black anodised, stainless steel cover, 2500 mm power supply cable. For vertical mounting in recess corners. With the Soft-Touch feature, light pressure makes the socket element glide gently out of the housing.</p> <p>Sockets - model F</p> | VPORT-F | | 33490 | 142 |
| | Sockets - model E | VPORT-E | | 33491 | 142 |
| | Sockets - model G | VPORT-G | | 33492 | 185 |
| | Sockets - model J without contact protection | VPORT-J | | 33497 | 191 |
| | Sockets - model K | VPORT-K | | 33494 | 185 |
| | Sockets - model L <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i> | VPORT-L | | 33495 | 185 |
|  |  <p>EVoline port with USB charger Retractable double socket with charging function via USB port model A, 5 V DC, Charging current: 1000 mA, with contact protection, housing made of aluminium, Silver or Black anodised tilting cover and bushing made of plastic For mounting in worktops up to max. 50 mm thick. Mounting hole: 102 mm diameter. 2500 mm power supply cable</p> <p>Available in: 014 Stainless steel appearance, 010 Black</p> <p>Sockets - model F</p> | PORT-F | | 36211 | 143 |
| | Sockets - model E | PORT-E | | 36212 | 143 |
| | Sockets - model G | PORT-G | | 36213 | 149 |
| | Sockets - model K | PORT-K | | 36215 | 149 |
| | Sockets - model L | PORT-L | | 36216 | 149 |
| | Sockets - model J without contact protection | PORT-J | | 36214 | 149 |
| | Sockets - model B <i>If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.</i> <i>Available in EU and EEA countries. An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of our socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i> | PORT-B | | 33489 | 229 |

| Worktop accessories | | | Abbreviation | | Width in cm | Order No. | Points |
|---|---|--------------|--------------|-----|-------------|-----------|--------|
| | | | | | | | |
| Accessories for worktops | | | | | | | |
|  | Spatter shield made of glass 8 mm thick, 200 mm high, with 2 supports in stainless steel appearance for mounting on the worktop, for planning behind hot plates and sinks width 600 mm: drilling distance 554 mm, drill hole diameter 6 mm width 900 mm: drilling distance 854 mm, drill hole diameter 6 mm <i>Not suitable for mounting on Slim Line worktops, 12 mm quartz worktops and Xtra Ceramic worktops.</i> | 600 mm wide | APSS | 60 | 33416 | 98 | |
| | | 900 mm wide | APSS | 90 | 33419 | 111 | |
|  | Child safety guard for hobs and hot plates to be fitted on the worktop <i>Not suitable for mounting on Slim Line worktops, 12 mm quartz worktops and Xtra Ceramic worktops.</i> | 600 mm wide | APKS | 60 | 4746 | 77 | |
| | | 900 mm wide | APKS | 90 | 4749 | 80 | |
|   | Storage tray Tara Aluminium profile incl. cover and non-slip mat 140 mm high, 175 mm deep, For 612 and 912 mm: 1 tray insert, solid wood 150 mm long 1 partition For 1212 mm: 2 tray inserts, solid wood 150 mm long 2 partitions Cut-out dimensions: 600 mm / 900 mm / 1200 mm x 150 mm Available in: 014 Stainless steel appearance and 010 Black <i>Can only be installed in extra deep worktops.</i> | 612 mm wide | APTARA | 60 | 44416 | 232 | |
| | | 912 mm wide | APTARA | 90 | 44419 | 269 | |
| | | 1212 mm wide | APTARA | 120 | 44422 | 364 | |
|  | Ventilation grille, stainless steel 70 mm deep, for installation in worktops as venting for heating systems Cut-out dimensions LGA 41: 388 x 60 mm, ventilation cross section 70,2 cm² Cut-out dimensions LGA 54: 518 x 60 mm, ventilation cross section 93,6 cm² <i>Not suitable for venting refrigerators.</i> | | LGA | 41 | 9505 | 20 | |
| | | | LGA | 54 | 9507 | 22 | |
|  | Cable feed-through Die-cast zinc, with locking lid for mounting in top shelves and worktops, 21 mm high outer diameter: 67 mm cut-out dimensions: 60 mm Available in: 014 Stainless steel appearance, 010 Black | | KDW | | 3510 | 22 | |
|  | Worktop sealing strip as moisture protection for hot plate and sink cut-outs, as well as for use as steam protection beneath the worktop above dishwashers, incl. installation instructions. Length: 9000 mm, width: 50 mm, thickness 0.5 mm <i>The sealing strip is included in the delivery of the worktop, but must be ordered separately with replacement delivery.</i> | | APVSB | | 9880 | 25 | |







| Worktop accessories | | | | Abbreviation | | Width in cm | Order No. | Points | |
|--|--|---|--------------|--------------|-----|-------------|-----------|--------|--|
| | | | | | | | | | |
| Rail system in stainless steel appearance | | | | | | | | | |
| |  | Set of railing 1 in stainless steel appearance <u>consisting of:</u> 1 moulding, 600 mm wide 1 pegboard | 600 mm wide | R-SET1 | | | 3501 | 60 | |
| |  | Set of railing 2 in stainless steel appearance <u>consisting of:</u> 2 mouldings, 600 mm wide 1 pegboard 1 paper roll holder | 1200 mm wide | R-SET2 | | | 3502 | 117 | |
| |  | Set of railing 3 in stainless steel appearance <u>consisting of:</u> 3 mouldings, 600 mm wide 1 pegboard 1 paper roll holder 1 multi-functional tray | 1800 mm wide | R-SET3 | | | 3503 | 185 | |
| |  | Railing bar with hooks in stainless steel appearance in 600 mm width: 4 hooks in 900 mm width: 8 hooks | 600 mm wide | RSLH-H | 60 | | 3506 | 69 | |
| | | | 900 mm wide | RSLH-H | 90 | | 3509 | 88 | |
| Railing system with LED lighting | | | | | | | | | |
|   |  | Railing bar with hooks and LED lighting black, in 600 mm width: 4.7 W with 4 hooks in 900 mm width: 7 W with 6 hooks in 1200 mm width: 9.4 W with 8 hooks 1700 mm connection cable to starter set with Emotion technology Energy efficiency rating: F <i>LED starter sets LSET30/60(-F), LSETR30/60(-F), LSET60-4K and follow-up set LFSET30/60 are not included in the scope of delivery.</i> <i>Refer to accessories list, page Z 4.13.</i> <i>Cannot be planned with glass niche cladding NVG*.</i> | 600 mm wide | RSLED | 60 | -S | 45816 | 101 | |
| | | | 900 mm wide | RSLED | 90 | -S | 45817 | 121 | |
| | | | 1200 mm wide | RSLED | 120 | -S | 45818 | 142 | |
|   |  | Railing bar with hooks and LED lighting in stainless steel appearance, in 600 mm width: 4.7 W with 4 hooks in 900 mm width: 7 W with 6 hooks in 1200 mm width: 9.4 W with 8 hooks 1700 mm connection cable to starter set with Emotion technology Energy efficiency rating: F <i>LED starter sets LSET30/60(-F), LSETR30/60(-F), LSET60-4K and follow-up set LFSET30/60 are not included in the scope of delivery.</i> <i>Refer to accessories list, page Z 4.13.</i> <i>Cannot be planned with glass niche cladding NVG*.</i> | 600 mm wide | RSLED | 60 | -E | 45820 | 96 | |
| | | | 900 mm wide | RSLED | 90 | -E | 45821 | 118 | |
| | | | 1200 mm wide | RSLED | 120 | -E | 45822 | 139 | |

| Worktop accessories | | | | Abbreviation | | Order No. | Points |
|---|--|-------------|--------------|--------------|-------|-----------|--------|
| | | | | Width in cm | | | |
| Railing system Linero-MosaiQ | | | | | | | |
|  | Aluminium profile LINERO-MosaiQ in stainless steel appearance <u>consisting of:</u> 2 end pieces, 1 connector 3 screws, 3 dowels | 600 mm wide | RSM-P | 60 | 45800 | 61 | |
| | | 900 mm wide | RSM-P | 90 | 45801 | 79 | |
| | | | 1200 mm wide | RSM-P | 120 | 45802 | 102 |
|  | Pegboard LINERO-MosaiQ black graphite dimensions: 250 mm x 38 mm x 44 mm | | RSM-HL | | 45803 | 23 | |
|  | Multi-purpose shelf LINERO-MosaiQ black graphite with black stripe dimensions: 350 mm x 110 mm x 200 mm | | RSM-UA | | 45804 | 54 | |
|  | Multi-purpose shelf LINERO-MosaiQ black graphite with black stripe dimensions: 350 mm x 110 mm x 300 mm | | RSM-UAH | | 45805 | 60 | |
|  | Multi-purpose shelf with railing LINERO-MosaiQ black graphite dimensions: 350 mm x 110 mm x 200 mm | | RSM-UAB | | 45806 | 60 | |
|  | Quiver / Herb pot LINERO-MosaiQ white, incl. removable divider (black) material: ABS, UV-resistant, food safe and dishwasher safe, comes standard equipped with a magnet dimensions: 135 mm x 135 mm x 156 mm | | RSM-KH | | 45807 | 23 | |
|  | Magnetic knife holder LINERO-MosaiQ black graphite, knife holding fixture made of plastic dimensions: 350 mm x 45 mm x 200 mm | | RSM-MH | | 45808 | 145 | |

Worktop accessories

| | | | Abbreviation | Width in cm | Order No. | Points |
|------------|--|---|--------------|-------------|-----------|--------|
| | | | | | | |
| |  | Paper roll holder LINERO-MosaiQ black graphite for kitchen rolls up to 295 mm wide dimensions: 350 mm x 120 mm x 155 mm | RSM-RH | | 45809 | 44 |
| |  | Foil dispenser LINERO-MosaiQ black graphite suitable for rolls up to 330 mm wide dimensions: 350 mm x 110 mm x 300 mm | RSM-FR | | 45810 | 130 |
| NEW |  | LINERO-MosaiQ tablet holder graphite black outer dimensions: 250 mm x 268,5 mm x 147 mm tray dimensions: 250 mm x 226 mm x 47 mm | RSM-TH | | 45813 | 38 |
| |  | Tray flat LINERO-MosaiQ white, material: ABS, UV-resistant, food safe and dishwasher safe dimensions: 116 mm x 115 mm x 56 mm | RSM-SF | | 45811 | 18 |
| |  | Top shelf LINERO-MosaiQ black graphite dimensions: 350 mm x 107 mm x 8 mm | RSM-AO | | 45812 | 31 |

Niche accessory with mounting bracket






| | | | | | | |
|---|--|--|----------|--|------|-----|
|  |  | Paper roll holder with towel hooks Material: Metal, Black incl. mounting bracket, also suitable for use with trolley table SERVE dimensions: 545 mm x 125 mm x 123 mm | SERVE-PH | | 7021 | 104 |
|  |  | Multi-purpose shelf with lid Material: Metal, Black incl. mounting bracket, also suitable for use with trolley table SERVE dimensions: 548 mm x 54 mm x 150 mm | SERVE-UA | | 7022 | 178 |
|  |  | Bottle holder Material: Metal, Black incl. mounting bracket, also suitable for use with trolley table SERVE dimensions: 548 mm x 154 mm x 123 mm | SERVE-FA | | 7023 | 137 |











3







Tall unit accessories
Wall unit accessories
General accessories













| Tall unit accessories | | | Abbreviation | | Width in cm | Order No. | Points |
|---|--|--|--|----------------------------|--|----------------------------------|--------|
| | | | | | | | |
| Accessories for tall units | | | | | | | |
|  | ComfortSpin Turntable, rotates 360° for refrigerators, pantry units or wall unit bottom shelves upwards of 500 mm width. transparent matt plastic, load capacity: 8 kg, off-centre load capacity up to 3 kg, installation surface: min. 425 x 285 mm, attach with suction cups or screws <i>Minimum unit width 500 mm.</i> <i>In wall units can only be mounted on bottom shelves.</i> <i>Not possible with wall units incl. MP-WOGL.</i> | COMSPIN | | | 3600 | 118 | |
|  | Tablar shelf with metal railing matches pantry unit „Cargo“ | TB-HC TB-HC | 50 60 | | 29227 29229 | 69 69 | |
|  | Hanging basket with wood bottom and metal railing, incl. mounting bracket, matches larder pull-out HA* / NHA* | HA-K HA-K | 30 40 | | 23860 23870 | 50 51 | |
|  | Hanging basket with wooden base and glass side panelling matches larder pull-out HA* / NHA* | HD-KG HD-KG | 30 40 | | 29703 29704 | 73 79 | |
| No image | Anti-slip mats, anthracite for corner units and corner highboards with swivel pull-out 2 pieces, fits models UEDSA*/-X/-M, UESA*/-X, UEV(S)A*(-X), NUESA*/-X and HESA*/-X | RM-UESA RM-UESA RM-UESA RM-UESA RM-UESA RM-UESA | 90-45 90-45 100-50 100-50 100-60 100-60 | R L R L R L | 29250 29251 29252 29253 29254 29255 | 26 26 37 37 37 37 | |
| No image | Anti-slip mats, anthracite for pantry unit Cargo 2 pieces matching for model (20571/20572, 22711/22712, 25571/25572, 31571/31572, 32711/32712, 35571/35572, 37571/37572, 38571/ 38572, 38711/38712, 42711/42712, 45571/45572, 57571/57572, 65711/65712, 68571/68572) | RM-HC RM-HC | 50 60 | | 29225 29226 | 13 15 | |
| No image | Anti-slip mat, anthracite for larder units 2 pieces matching for model HA* / NHA | Premium RM-HA RM-HA | 30 40 | | 23861 23871 | 13 15 | |
|  | Latch for simultaneous opening of internal drawers suitable for pull-out units with internal drawers | MITIS | | | 26730 | 22 | |

| Tall unit accessories | | Abbreviation | Width in cm | Order No. | Points |
|--|---|--------------|-------------|-----------|--------|
| | | | | | |
|  | Lid and towel holder, stainless steel finish 2 pieces with mounting plate, 2 knurled screws drill spacing: 392 mm dimensions: 457 x 40 mm, 12 mm Ø | DTH | | 9412 | 20 |
|  | Clothes drying rack, laundry area for mounting to unit or to the wall, foldable height: 300 mm, width: 525 mm, depth: 820 mm | WTLA | | 28189 | 99 |
|  | Tablar pull-out, laundry area Tablar pull-out, white powder-coated metal height: 67.5 mm, width: 568, depth: 509.5 mm <i>Max. load capacity of tablar shelf: 40 kg</i> <i>Can be installed in 561 mm deep base and tall units.</i> | WTBLA | | 28190 | 239 |
|  | Laundry basket, laundry area blue plastic, matches tablar pull-out WTBLA or can be installed in a bottom pull-out minimum 357 mm high and 600 mm wide. height: 304 mm, width: 520 mm, depth: 462 mm <i>Can be combined with Laundry Area tablar pull-out or installed in a bottom pull-out at least 357 mm high, upwards of 600 mm width.</i> | WKLA | | 28191 | 96 |
|  | Recycling collector with cotton sack, laundry area carrier frame with cover flap, white powder-coated metal, incl. durable cotton sack cover flap dimensions: height: 125 mm, width: 404 mm, depth: 261 mm <i>Note that for installation in pantry units, the construction shelf must be moved up.</i> <i>Please specify this in the order.</i> | WDBLA | | 28192 | 161 |
|  | Broom / mop holder, laundry area white powder-coated metal <i>Note that for installation in pantry units, the construction shelf must be moved up.</i> <i>Please specify this in the order.</i> | BWHLA | | 28193 | 82 |
|  | 2 utensil containers with mounting brackets, laundry area for hanging up and taking out, for clothes-pegs and bits and pieces, wall bracket white powder-coated metal, utensil holder blue plastic height: 241 mm, width: 436 mm, depth: 198 mm | UBWLA | | 28194 | 83 |
|  | Shelf with dustpan set, laundry area shelf for mop bucket, white powder-coated metal, dustpan set | AKSLA | | 28195 | 162 |
|  | 2 multi-purpose brackets, laundry area white powder-coated metal <i>Note that for installation in pantry units, the construction shelf must be moved up.</i> <i>Please specify this in the order.</i> | MFHLA | | 28196 | 53 |

| Wall unit accessories | | | | Abbreviation | | Width in cm | Order No. | Points |
|---|---|--|--|--------------|----|-------------|-----------|--------|
| | | | | | | | | |
| Accessories for wall units | | | | | | | | |
|  | Spice rack for 12 spice jars 456,5 mm high, 184 mm wide, 73 mm deep, without spices <i>If retrofitting after initial installation, the wall unit shelf must be reduced in depth by the customer (this is not necessary if ordered with the unit).</i> | | | GB | 30 | -12 | 9022 | 26 |
| | | | | GB | 40 | -12 | 9023 | 26 |
| | | | | GB | 45 | -12 | 9024 | 26 |
| | | | | GB | 50 | -12 | 9025 | 26 |
| | | | | GB | 60 | -12 | 9027 | 26 |
| | Spices 12 jars, a selection of the most common spices <i>Not available in: USA, Canada.</i> | | | GD12 | | | 9487 | 28 |
|  | Spice rack for 24 spice jars 456,5 mm high, 358 mm wide, 73 mm deep, without spices <i>If retrofitting after initial installation, the wall unit shelf must be reduced in depth by the customer (this is not necessary if ordered with the unit).</i> | | | GB | 50 | -24 | 9029 | 37 |
| | | | | GB | 60 | -24 | 9030 | 37 |
| | Spices 24 jars, a selection of the most common spices. <i>Not available in: USA, Canada</i> | | | GD24 | | | 9486 | 54 |
|  | Steam protection plates for wall units near the hot plate, packed in pairs (1 set for LH and RH) Colour No.: 046 silver colour | | | DDS | | | 4500 | 15 |
|  | Shelf holders, suitable for wall shelf units from 6 to 52 mm thickness for mounting on the wall, height and shelf thickness adjustable between 6 - 52 mm, width: 30 mm, height: 102 - 148 mm, included in delivery: 2 pieces Available in: 014 Stainless steel appearance, 010 Black <i>4 pieces are necessary for wall shelves with widths upwards of 1001 mm!</i> <i>If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.</i> | | | VBH5 | | | 5900 | 31 |
|  | Wire cable suspension, chrome-plated Suspension height up to 1000 mm comprising of 2 wire cables, each 1000 mm long, cable mounting bracket top, cable mounting bracket bottom with infinitely adjustable height, dowels 8 mm, fastening plate and screws, load capacity up to 20 kg | | | AHDS | | | 4370 | 72 |
| No image | Anti-slip mat, anthracite for corner wall units 2 pieces matching for ref. WEDD65-1 / WEDD65-2 / WEDD65-3. | | | RM-WED | 60 | | 29260 | 25 |

| Cooker hood accessories | | | Abbreviation | Width in cm | Order No. | Points |
|---|---|---|--------------|-------------|-----------|--------|
| Cooker hoods accessories | | | | | | |
|  |  | Extraction set consisting of: • 1 flexible hose, 1500 mm long, Ø 152 mm • 2 hose clamps, Ø 152 mm • 1 reducer from 125 to 150 mm Only available in following countries: Germany, France, Netherlands, Belgium, Luxembourg, Italy and Austria | DZA-SET | | 18400 | 51 |
|  |  | Flat duct set 1 consisting of: • 2 x 1000 mm flat duct tube 150 mm • 1 x deflector with 900 mm round tube • 1 x connecting sleeve • 1 x end piece / transition element Only available in following countries: Germany, France, Netherlands, Belgium, Luxembourg, Italy and Austria | DZF-SET1 | | 18401 | 156 |
|  |  | Flat duct set 2 consisting of: • 3 x 1000 mm flat duct tube, 150 mm • 1 deflector with 900 mm round tube • 2 x connecting sleeve • 1 x end piece / transition element • 1 x bend tube 90°, horizontal Only available in following countries: Germany, France, Netherlands, Belgium, Luxembourg, Italy and Austria | DZF-SET2 | | 18402 | 222 |
|  |  | Wall conduct 150 incl. THERMOBOX Wall conduct with telescopic tube, incl. built-in heat retention system THERMOBOX and stainless steel external blind „E-Jal Col“. Guide vanes on the slats of the blind ensure optimised flow guidance. Consisting of: • hose/tube socket/, Ø 150 mm • socket depth 24 mm • installation depth 350 - 500 mm • wall penetration, Ø 155 mm • blower door certified (required opening pressure >65 Pa) Only available in following countries: Germany, France, Netherlands, Belgium, Luxembourg, Italy and Austria | DZMK | | 18403 | 327 |
|  |  | THERMOBOX 150 Heat retention system THERMOBOX for retrofitting on existing Naber wall conducts and suitable for vertical mounting (exhaust duct via roof). • blower door certified (required opening pressure >65 Pa) Only available in following countries: Germany, France, Netherlands, Belgium, Luxembourg, Italy and Austria | DZTB | | 18404 | 86 |

| Mounting sets / Internal drawers and pull-outs | | | Abbreviation | | Order No. | Points |
|---|--|---|--------------|----|-----------|--------|
| | | | Width in cm | | | |
| Mounting sets | | | | | | |
|  |  | Mounting set 1 consisting of: • 1 ball siphon 1 ½" with 40 mm drain white • 1 space-saving connector white • 1 HT bend DN 40/87 grey • 1 HT tube DN 40 x 250 mm grey • 1 HT transition element DN 40/50 mm grey • 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long • 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut | MONSET1 | | 9911 | 55 |
| | | | | | | |
|  |  | Mounting set 2 consisting of: • 1 ball siphon 1 ½" with 40 mm drain white • 1 space-saving connector white • 1 HT bend DN 40/87 grey • 1 HT tube DN 40 x 250 mm grey • 1 HT transition element DN 40/50 mm grey • 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long • 2 flex hoses acc. to KTW-A, 300 mm long, 3/8" x 10 mm with union nut • 1 hose clip, 16 - 25mm • 1 table socket triple, white with 1500 mm supply line, 3 x 1.5 mm² <i>An up-to-date overview of additional approved countries can be found in the nobilia Extranet. An overview of the socket range can be found on the rear side of the chapter 2 index for worktop accessories.</i> | MONSET2 | | 9912 | 61 |
| | | | | | | |
| Internal drawers and pull-outs | | | | | | |
|  | Internal drawer with pull-out runners drawer depth 500 mm, matches units with front pull-out , for tall or base units, load capacity of pull-out runners up to 40 kg | UIS | 30 | -A | 26732 | 120 |
| | | | | | | |
| | | UIS | 40 | -A | 26733 | 120 |
| | | | | | | |
| | | UIS | 45 | -A | 26734 | 123 |
| | | | | | | |
| | | UIS | 50 | -A | 26735 | 123 |
| | | | | | | |
| | | UIS | 60 | -A | 26736 | 124 |
| | | | | | | |
| | | UIS | 80 | -A | 26738 | 136 |
| | | | | | | |
| | | UIS | 90 | -A | 26739 | 137 |
| | | | | | | |
| | | UIS | 100 | -A | 26740 | 142 |
| | | | | | | |
| | | UIS | 120 | -A | 26742 | 147 |
| | | | | | | |
| | as above, however, matching elements with door hinge , with 110° hinges, incl. 2 x 25 mm compensation strip <i>Not to be planned for units with front pull-out.</i> <i>For use as internal drawers behind hinged doors with 110° hinges, order cutlery trays 50 mm smaller than unit width!</i> | UIS | 40 | -T | 26743 | 118 |
| | | | | | | |
| | | UIS | 45 | -T | 26744 | 118 |
| | | | | | | |
| | | UIS | 50 | -T | 26745 | 120 |
| | | | | | | |
| | | UIS | 60 | -T | 26746 | 123 |
| | | | | | | |
|  | Internal pull-out with pull-out runners drawer depth 500 mm, matches units with front pull-out , for tall or base units, load capacity of pull-out runners up to 40 kg | UIA | 30 | -A | 26751 | 130 |
| | | | | | | |
| | | UIA | 40 | -A | 26752 | 134 |
| | | | | | | |
| | | UIA | 45 | -A | 26754 | 136 |
| | | | | | | |
| | | UIA | 50 | -A | 26755 | 137 |
| | | | | | | |
| | | UIA | 60 | -A | 26756 | 142 |
| | | | | | | |
| | as above, however, matching elements with door hinge , with 110° hinges, incl. 2 x 25 mm compensation strip <i>Not to be planned for units with front pull-out.</i> | UIA | 40 | -T | 26763 | 130 |
| | | | | | | |
| | | UIA | 45 | -T | 26764 | 131 |
| | | | | | | |
| | | UIA | 50 | -T | 26765 | 134 |
| | | | | | | |
| | | UIA | 60 | -T | 26766 | 136 |
| | | | | | | |

| General accessories | | | | Abbreviation | Width in cm | Order No. | Points | |
|---|--|--|---|---|--------------|-----------|--------|--|
| | | | | | | | | |
| Pull-out rails | | | | | | | | |
|  | Profi+ pull-out runners for drawers with widths of 300 - 1000 mm and pull-outs with widths of 300 - 600 mm, load capacity up to 40 kg | Side depth 560 mm | VAS40-56 | | 26996 | 38 | | |
| | | Side depth 460 mm | VAS40-46 | | 26993 | 53 | | |
| | | Side depth 320 mm | VAS40-32 | | 26991 | 50 | | |
| | Profi+ pull-out runners for pull-outs with widths of 800 - 900 mm, load capacity up to 60 kg | Side depth 560 mm | VAS90-56 | | 26997 | 57 | | |
| | | Side depth 460 mm | VAS90-46 | | 26994 | 58 | | |
| | Profi+ pull-out runners for pull-outs with width of 1000 - 1200 mm, load capacity 70 / 80 kg | Side depth 560 mm | VAS100-56 | | 26998 | 53 | | |
| | Trolley table | | | | | | | |
| |  |  | Trolley table SERVE Steel frame, Black with 2 shelves made of 16 mm carcass material, with 4 castors, foldable dimensions: 555 mm x 822 mm x 555 mm, when folded: 555 mm x 822 mm x 100 mm <i>The storage shelf is available in all carcass colours and worktop décors of décor group 1, except 066 Slate décor and 366 Black textured.</i> <i>Not available in Xtra décors.</i> <i>The illustrated accessory items are not included in the scope of delivery.</i> | | SERVE | 7011 | 364 | |
| | |  |  |  | | | | |
|  |  | Paper roll holder with towel hooks Material: Metal, Black incl. mounting bracket, also suitable for use with trolley table SERVE dimensions: 545 mm x 125 mm x 123 mm | | SERVE-PH | 7021 | 104 | | |
|  |  | Multi-purpose shelf with lid Material: Metal, Black incl. mounting bracket, also suitable for use with trolley table SERVE dimensions: 548 mm x 54 mm x 150 mm | | SERVE-UA | 7022 | 178 | | |
|  |  | Bottle holder Material: Metal, Black incl. mounting bracket, also suitable for use with trolley table SERVE dimensions: 548 mm x 154 mm x 123 mm | | SERVE-FA | 7023 | 137 | | |

| General accessories | | | Abbreviation | Width in cm | Order No. | Points |
|---|--|----------|--------------|-------------|-----------|--------|
| | | | | | | |
| General accessories | | | | | | |
|  | Worktop logo nobilia 1 piece | BRAND | | 9405 | 9,6 | |
|  | nobilia cover caps for drawers / pull-outs 20 pieces in the bag | ADKSA | | 26907 | 14,3 | |
|  | nobilia cover caps for hinges 20 pieces in the bag <i>Not suitable for TS165.</i> | ADKS | | 26921 | 11,1 | |
|  | 85° Opening angle limit for quick-mount concealed hinge Sensys with cushioning Included in delivery: 2 pcs. for 95° hinge Sensys with cushioning 8 pcs. for 110° hinge Sensys with cushioning | OWB85 | | 6328 | 11,4 | |
| | as above, however as 90° Opening angle limit in LINE N kitchens Included in delivery: 16 pcs. for 110° hinge Sensys with cushioning 4 pcs. for 110° hinge Sensys without cushioning | NOWB | | 6332 | 13,6 | |
|  | 85° Opening angle limit for aluminium framed door Flat 2 pieces in the bag | OWBF85 | | 6338 | 11,1 | |
|  | Opening angle limiter for AVENTOS flap door fittings Included in delivery: 4 x 2 pcs. per bag incl. assembly instructions | OWB-HKSN | | 6329 | 13 | |
|  | Opening angle limiter for AVENTOS folding lifting fitting Included in delivery: 2 x 2 pcs.per bag including assembly instruction | OBK-HF | | 6336 | 12,7 | |
|  | Opening support mechanism for handleless doors for screw mounting to the carcass interior. Included in delivery: 5 pieces <i>Not possible with flaps and pull-outs and corner wall units WE 60/65/80/90*</i> | PTO5 | | 3857 | 34,9 | |

| General accessories | | | Abbreviation | | Order No. | Points | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------------------------|--|---|---------------------------------------|-----------------------|-----------|--------|-------|-------|------|------------------------|------------|-----|-------|------|-------|-----------------------|-------|------------|-------|------|-----|-----------------------|-------|----|------------|------|----|------------------------|-------|-----|-------|------|--|-----------------------|-------|----|-------|------|--|------------------------|-------|-----|-------|------|--|-----------------------|-------|----|-------|------|--|------------------------|-------|-----|-------|------|--|--|--|--|--|
| | | | Width in cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NEW |  | <p>Opening support mechanism with drill jig for handleless doors for drilling into carcass bottom or carcass side. Included in delivery: 5 pcs. with drill jig <i>Not possible with flaps, pull-outs.</i> <i>Recommended for handleless glass doors Flat.</i></p> | PTO5-BS | | 6339 | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| |  | <p>Cover plugs, white for shelf support drill holes with 5 mm Ø 200 pieces in the bag, dimensions: head: 5.7 x 0.4 mm, shaft: 7.6 mm</p> | BTS-SET | | 9201 | 12,3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| |  | <table><tr><td>Shoe for 10 mm end panel</td><td>for 635 mm side depth</td><td>ZWS10</td><td>64</td><td>10736</td><td>12,1</td></tr><tr><td></td><td>for 1170 mm side depth</td><td>ZWS10</td><td>117</td><td>10741</td><td>15,2</td></tr></table> <p>as above, however for 16 mm end panel</p> <table><tr><td></td><td>for 635 mm side depth</td><td>ZWS16</td><td>64</td><td>16736</td><td>12,4</td></tr><tr><td></td><td>for 862 mm side depth</td><td>ZWS16</td><td>86</td><td>16738</td><td>14,2</td></tr><tr><td></td><td>for 1170 mm side depth</td><td>ZWS16</td><td>117</td><td>16741</td><td>14,3</td></tr></table> <p>as above, however for 25 mm end panel</p> <table><tr><td></td><td>for 635 mm side depth</td><td>ZWS25</td><td>64</td><td>25736</td><td>12,6</td></tr><tr><td></td><td>for 1170 mm side depth</td><td>ZWS25</td><td>117</td><td>25741</td><td>14,5</td></tr></table> <p>as above, however for 50 mm end panel</p> <table><tr><td></td><td>for 635 mm side depth</td><td>ZWS50</td><td>64</td><td>50736</td><td>12,4</td></tr><tr><td></td><td>for 1170 mm side depth</td><td>ZWS50</td><td>117</td><td>50741</td><td>15,8</td></tr></table> <p>Available colours: 010 Black, 014 Stainless steel appearance <i>If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.</i></p> | Shoe for 10 mm end panel | for 635 mm side depth | ZWS10 | 64 | 10736 | 12,1 | | for 1170 mm side depth | ZWS10 | 117 | 10741 | 15,2 | | for 635 mm side depth | ZWS16 | 64 | 16736 | 12,4 | | for 862 mm side depth | ZWS16 | 86 | 16738 | 14,2 | | for 1170 mm side depth | ZWS16 | 117 | 16741 | 14,3 | | for 635 mm side depth | ZWS25 | 64 | 25736 | 12,6 | | for 1170 mm side depth | ZWS25 | 117 | 25741 | 14,5 | | for 635 mm side depth | ZWS50 | 64 | 50736 | 12,4 | | for 1170 mm side depth | ZWS50 | 117 | 50741 | 15,8 | | | | | |
| Shoe for 10 mm end panel | for 635 mm side depth | ZWS10 | 64 | 10736 | 12,1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | for 1170 mm side depth | ZWS10 | 117 | 10741 | 15,2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | for 635 mm side depth | ZWS16 | 64 | 16736 | 12,4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | for 862 mm side depth | ZWS16 | 86 | 16738 | 14,2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | for 1170 mm side depth | ZWS16 | 117 | 16741 | 14,3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | for 635 mm side depth | ZWS25 | 64 | 25736 | 12,6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | for 1170 mm side depth | ZWS25 | 117 | 25741 | 14,5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | for 635 mm side depth | ZWS50 | 64 | 50736 | 12,4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | for 1170 mm side depth | ZWS50 | 117 | 50741 | 15,8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | No image | <table><tr><td>End cap for upright panel shoe</td><td>10 mm wide</td><td>ZWS</td><td>10</td><td>-EK</td><td>10777</td><td>11,4</td></tr><tr><td></td><td>16 mm wide</td><td>ZWS</td><td>16</td><td>-EK</td><td>16777</td><td>11,8</td></tr><tr><td></td><td>25 mm wide</td><td>ZWS</td><td>25</td><td>-EK</td><td>25777</td><td>9,5</td></tr><tr><td></td><td>50 mm wide</td><td>ZWS</td><td>50</td><td>-EK</td><td>50777</td><td>9,5</td></tr></table> <p>Available colours: 010 Black, 014 Stainless steel appearance</p> | End cap for upright panel shoe | 10 mm wide | ZWS | 10 | -EK | 10777 | 11,4 | | 16 mm wide | ZWS | 16 | -EK | 16777 | 11,8 | | 25 mm wide | ZWS | 25 | -EK | 25777 | 9,5 | | 50 mm wide | ZWS | 50 | -EK | 50777 | 9,5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| End cap for upright panel shoe | 10 mm wide | ZWS | 10 | -EK | 10777 | 11,4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 16 mm wide | ZWS | 16 | -EK | 16777 | 11,8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 25 mm wide | ZWS | 25 | -EK | 25777 | 9,5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 50 mm wide | ZWS | 50 | -EK | 50777 | 9,5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| USA TGA |  | <p>Eco-power cleaner 1000 ml spray bottle, for household cleaning purposes, especially for kitchens, offices, business, worktop, leisure and hobby</p> <ul style="list-style-type: none">• removes a large number of soiling• powerful, dirt dissolving, mild cleaner• biologically degradable, phosphate free, not etching,• without solvent• concentrate to be diluted with water 1:20 | OKR | | 9458 | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Lighting symbol overview



Energy efficiency rating: A - G



With Emotion technology:


infinitely adjustable colour temperature from warm white to cold white




With colour switch:

adjustable from warm white to cold white



| Lighting | | Abbreviation | | Order No. | Points | |
|---|---|---|--|------------|--------|-----|
| | | Width in cm | | | | |
| Light fixtures | | | | | | |
| <div><div>USA CAN</div><div>2700K-6500K</div><div>F</div></div> |  | LED built-in / surface-mounted light Super-Spot stainless steel appearance LED - 2 W / 12 V DC, 2700 - 6500 K 1700 mm connection cable to starter set diameter: 48 mm, height: 25 mm, built-in depth: 15 mm, drill diameter: 42 mm. For mounting in glass wall units. Energy efficiency rating F <i>For use as individual light - refer to accessories list, page Z 4.13.</i> | | LSUPER | 15006 | 41 |
| | | LED light set Super-Spot 3 LED lights Super-Spot (model 15006) 1 LED starter set with Emotion dimmer Energy efficiency rating F | | LSUPER-SET | 15007 | 185 |
| <div><div>USA CAN</div><div>2700K-6500K</div><div>D</div></div> |  | LED built-in / surface-mounted light Moonlight stainless steel appearance LED - 3.9 W / 12 V DC, 2700 - 6500 K 1700 mm connection cable to starter set diameter: 75 mm, height: 15 mm, built-in depth: 13 mm, drill diameter: 68 mm. For mounting in glass wall units, cornice shelves and bridging shelves. Energy efficiency rating D <i>For use as individual light - refer to accessories list, page Z 4.13.</i> | | LMOON | 15008 | 50 |
| | | LED light set Moonlight 3 LED lights Moonlight (model 15008) 1 LED starter set with Emotion dimmer Energy efficiency rating D | | LMOON-SET | 15009 | 220 |
| <div><div>2700K-6500K</div><div>G</div><div>D</div></div> |  | LED built-in / built-on lamp Nova Plus stainless steel appearance LED - 3.0 W / 12 V DC, 2700 - 6500 K 1700 mm connection cable to starter set diameter: 75 mm, surface-mounted height: 14 mm built-in depth: 13 mm, drill diameter: 68 mm. For mounting in glass wall units, cornice shelves and bridging shelves. Energy efficiency rating G <i>For use as individual light - refer to accessories list, page Z 4.13.</i> | | LNP | 5971 | 50 |
| | | LED light set Nova Plus 3 LED lights Nova Plus (model 5971) 1 LED starter set with Emotion dimmer Energy efficiency rating D <i>For surcharge (MP-LNP) also available as lighted design for wall units.</i> | | LNP-SET | 5972 | 220 |
| <div><div>USA CAN</div><div>2700K-6500K</div><div>E</div></div> |  | LED built-in / surface-mounted light, Sirio stainless steel appearance LED - 3 W / 12 V DC, 2700 - 6500 K 1700 mm connection cable to starter set diameter: 64,5 mm, height: 13,5 mm built-in depth: 11,5 mm, drill diameter: 55 mm. For mounting in glass wall units, cornice shelves and bridging shelves. Energy efficiency rating E <i>For use as individual light - refer to accessories list, page Z 4.13.</i> | | LSIR | 5964 | 41 |
| | | LED light set Sirio 3 LED lights Sirio (model 5964) 1 LED starter set with Emotion dimmer Energy efficiency rating E | | LSIR-SET | 5965 | 158 |

| Lighting | | Abbreviation | Width in cm | Order No. | Points |
|------------------|---|--------------|-------------|-----------|--------|
| | | | | | |
| 2700K-6500K G |  <p>LED glass cabinet light Retangolo I stainless steel appearance LED - 2,9 W / 12 V DC, 2700 - 6500 K 1700 mm connection cable to starter set width: 25 mm, depth: 155 mm, height: 10 mm. For mounting in glass wall units. Energy efficiency rating G <i>For use as individual light - refer to accessories list, page Z 4.13.</i></p> | LVR | | 5973 | 66 |
| | <p>LED light set Retangolo I 3 LED lights Retangolo I (model 5973) 1 LED starter set with Emotion dimmer Energy efficiency rating G</p> | LVR-SET | | 5974 | 263 |

Top shelf lights





| | | | | | |
|-----------------|--|----------|--|-------|-----|
| USA CAN G |  <p>LED Top shelf light, Cottage white décor glass LED - 1.5 W / 12 V DC, 3200 K 1700 mm connection cable to power supply set glass diameter: 66 mm, depth: 220 mm, height: 175 mm. For mounting on wall units or cornice shelves. Energy efficiency rating G Available in: 092 pewter-coloured, 074 burnished <i>For use as individual light - refer to accessories list, page Z 4.14.</i></p> | LOLH | | 15012 | 79 |
| | <p>LED top shelf light set Cottage 3 LED top shelf lights, Cottage (model 15012) 1 LED power supply set 1 switch with power cable Energy efficiency rating G</p> | LOLH-SET | | 15013 | 289 |


Recess lights

| | | | | | |
|--------------------------------|---|-----------|--|-------|-----|
| USA CAN F |  <p>LED recess light Mini metal, stainless steel appearance LED - 4 W / 12 V DC, 4000 K 2000 mm connection cable to power supply set diameter: 68 mm, height: 35 mm. For mounting beneath wall units. Energy efficiency rating F <i>For use as individual light - refer to accessories list, page Z 4.14.</i></p> | LN18 | | 15018 | 23 |
| | <p>LED recess light set Mini 3 LED recess lights, Mini (model 15018) 1 LED power supply set 1 switch with power cable Energy efficiency rating F</p> | LN18M-SET | | 15019 | 114 |
| USA CAN F 3000K/4000K |  <p>LED recess light set DHL 2 LED recess lights DHL (model 15041) 1 LED recess light DHL, as master light with switch 1 power supply unit 30 W with 6 input distributor and colour switch Energy efficiency rating F</p> | LN15M-SET | | 15042 | 120 |
| | <p>LED recess light DHL as accent light metal, stainless steel appearance LED 4 W / 12 V DC, 3000 - 4000 K 2000 mm connection cable to power supply unit width: 130 mm, depth: 136 mm, height: 48 mm For mounting beneath wall units. Energy efficiency rating F</p> | LN15 | | 15041 | 34 |










| Lighting | | | Abbreviation | Width in cm | Order No. | Points |
|---|---|---|--------------|-------------|-----------|--------|
| | | | | | | |
|   3000K/ 4000K |  | LED recess light set Stratos 2 LED recess lights, Stratos (model 15043) 1 LED recess light Stratos, as master light (with switch) 1 LED power supply set Energy efficiency rating F | LN3M-SET | | 15044 | 111 |
| | | LED recess light Stratos as accent light metal, stainless steel appearance LED 4 W / 12 V DC, 3000 - 4000 K 2000 mm connection cable to power supply unit width: 85 mm, depth: 140 mm, height: 50 mm For mounting beneath wall units. Energy efficiency rating F | LN3 | | 15043 | 34 |
|   3000K/ 4000K |  | LED recess light set Tain 2 LED recess lights Tain (model 15045) 1 LED recess light Tain, as master light with switch 1 power supply unit 30 W with 6 input distributor and colour switch Energy efficiency rating F | LNT-SET | | 15046 | 118 |
| | | LED recess light Tain as accent light metal, stainless steel appearance LED 4 W / 12 V DC, 3000 - 4000 K 2000 mm connection cable to power supply unit width: 75 mm, depth: 200 mm, height: 16 mm For mounting beneath wall units. Energy efficiency rating F | LNT | | 15045 | 34 |
|   3000K/ 4000K |  | LED recess light set Alustar U 2 LED recess lights Alustar U (model 15047) 1 LED recess light Alustar U, as master light with switch 1 power supply unit 30 W with 6 input distributor and colour switch Energy efficiency rating F | LNAS-SET | | 15048 | 188 |
| | | LED recess light Alustar U as accent light metal, stainless steel appearance LED 4 W / 12 V DC, 3000 - 4000 K 2000 mm connection cable to power supply unit width: 80 mm, depth: 200 mm, height: 6 mm For mounting beneath wall units. Energy efficiency rating F | LNAS | | 15047 | 61 |
|   |  | LED recess light set POLAR 3 LED recess lights POLAR (type 15051) in Black or Aluminium 2000 mm connection cable with touch switch with dimming function 1 power supply unit 30 W / 12 V DC 200 mm connection cable with 6 input distributor 2000 mm power cable with plug Energy efficiency rating G | LNPOLAR -SET | | 15050 | 219 |
| | | LED recess light Stratos as accent light made of aluminium, in Black or Aluminium LED - 5 W / 12 V DC, 2700 - 6000 K 2000 mm connection cable to the power supply unit width: 70 mm, depth: 190 mm, height: 5 mm For installation beneath wall units. Energy efficiency rating G Available in: 010 Black 068 Aluminium <i>Cannot be combined with Emotion technology transformers.</i> | LNPOLAR | | 15051 | 51 |







| Lighting | | Abbreviation | | Width in cm | Order No. | Points |
|---|--|---|------------|-------------|-----------|--------|
| | | | | | | |
|    |  | LED recess light Sirio Long stainless steel appearance LED - 3,6 W / 12 V DC, 2700 - 6500 K 1700 mm connection cable to starter set width: 54,5 mm, depth: 165 mm, height: 13,5 mm. For mounting beneath wall units. Energy efficiency rating E <i>For use as individual light - refer to accessories list, page Z 4.13.</i> | | LNSIRL | 5966 | 47 |
| | | LED recess light set Sirio Long 3 LED recess lights Sirio Long (model 5966) 1 LED starter set with Emotion dimmer Energy efficiency rating E | | LNSIRL-SET | 5967 | 184 |
|    |  | LED recess light Retangolo II stainless steel appearance LED - 2.2 W / 12 V DC, 2700 - 6500 K 1700 mm connection cable to starter set width: 40 mm, depth: 145 mm, height: 14 mm. For mounting beneath wall units. Energy efficiency rating F <i>For use as individual light - refer to accessories list, page Z 4.13.</i> | | LNRE | 5975 | 66 |
| | | LED recess light set Retangolo II 3 LED recess lights Retangolo II (model 5975) 1 LED starter set with Emotion dimmer Energy efficiency rating F | | LNRE-SET | 5976 | 266 |
|   |  | LED recess light Derby II Aluminium profile in Stainless steel appearance or Black with integrated LED light strip, LED 12 V DC, 2700 - 6500 K 2000 mm connection cable to starter set Cable outlet is centred. Energy efficiency rating G / Protection rating IP44 For mounting beneath worktops in conjunction with glass uprights or open shelf base unit Smartcube and beneath mirrored bathroom cabinets. Available in: 014 Stainless steel appearance, 010 Black <i>LED starter sets LSET30/60(-F), LSETR30/60-F, LSET60-4K and follow-up set LFSET30/60 are not included in the scope of delivery.</i> <i>If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.</i> | 6,6 watts | LNDERB 56 | 15056 | 53 |
| | | 8,7 watts | LNDERB 74 | 15057 | 58 | |
| | | 10,5 watts | LNDERB 88 | 15058 | 61 | |
| | | 12,2 watts | LNDERB 102 | 15059 | 67 | |
| | | | | | | |
| | | LED recess light Derby II as above, however variable LED light strip, width: 300 - 4000 mm 12 watts per running metre Lateral distance of 16 mm on each side is recommended. Cable outlet always left. Energy efficiency rating G / Protection rating IP20 For individualised planning beneath / on wall units or shelving systems. | LNDERB 400 | 15054 | 95 | |
|    |  | LED panel light stainless steel appearance LED - 5,5 W / 12 V DC, 2700 - 6500 K 1700 mm connection cable to starter set width: 105 mm, depth: 176 mm, height: 10 mm. For mounting beneath wall units. Energy efficiency rating D <i>For use as individual light - refer to accessories list, page Z 4.13.</i> | | LNFLE | 5985 | 70 |
| | | LED panel lighting set 3 LED panel lights (model 5985) 1 LED starter set with Emotion dimmer Energy efficiency rating D | | LNFLE-SET | 5986 | 282 |




| Lighting | | | | Abbreviation | | Width in cm | Order No. | Points | |
|------------------------------------|---|--|-------------------|--------------|------|-------------|-----------|--------|--|
| | | | | | | | | | |
| | | | | | | | | | |
| Fluorescent tubes, white | | | | | | | | | |
| E F |  | LED recess light Snite | 312 mm / 4 W | LNSN | 31 | | 15110 | 29 | |
| | | with switch and electronic ballast, white housing, | 541 mm / 7 W | LNSN | 54 | | 15111 | 34 | |
| | | LED - 12 V DC, 4000 K | 873 mm / 13 W | LNSN | 87 | | 15112 | 42 | |
| | | 2000 mm connection cable / 230 V | 1173 mm / 18 W | LNSN | 117 | | 15113 | 48 | |
| | | can be plugged in rows or with connection cable 170 mm | | | | | | | |
| | | depth: 36 mm, height: 22.8 mm | | | | | | | |
| | | For mounting beneath wall units. | | | | | | | |
| | | LNSN 31 / 87 Energy efficiency rating E | | | | | | | |
| | | LNSN 54 / 117 Energy efficiency rating F | | | | | | | |
| Fluorescent tubes, metal coloured | | | | | | | | | |
| USA CAN 2700K-6500K F |  | LED recess light Mini Corner | 450 mm / 6,59 W | LNC | 45 | | 15154 | 55 | |
| | | LED - 12 V DC, 2700 - 6500 K | 500 mm / 7,36 W | LNC | 50 | | 15155 | 60 | |
| | | 1700 mm connection cable to starter set | 600 mm / 8,91 W | LNC | 60 | | 15156 | 74 | |
| | | depth: 26,5 mm, height: 26,5 mm | 900 mm / 13,56 W | LNC | 90 | | 15159 | 102 | |
| | | For mounting beneath wall units. | 1200 mm / 18,21 W | LNC | 120 | | 15162 | 131 | |
| | | Energy efficiency rating F | | | | | | | |
| | | LED starter and follow-up sets are not included in the scope of delivery - refer to accessories list, page Z 4.13. | | | | | | | |
| 2700K-6500K F |  | LED recess light Manila Plus | 220 mm / 3,1 W | LNMP | 22 | | 5953 | 164 | |
| | | aluminium housing, stainless steel appearance | 420 mm / 6,2 W | LNMP | 42 | | 5954 | 180 | |
| | | plexiglas cover in satin finish | 720 mm / 10,85 W | LNMP | 72 | | 5955 | 187 | |
| | | LED - 12 V DC, 2700 - 6500 K | | | | | | | |
| | | 1700 mm connection cable to starter set | | | | | | | |
| | | depth: 34 mm, height: 13 mm | | | | | | | |
| | | 1 LED starter set with Emotion dimmer | | | | | | | |
| | | For mounting beneath wall units. | | | | | | | |
| | | Energy efficiency rating F | | | | | | | |
| | | For use as individual light - refer to accessories list, page Z 4.13. | | | | | | | |
| | | LED recess light Manila Plus, as above | 220 mm / 3,1 W | LNMP | 22-E | | 5956 | 47 | |
| | | however as supplement | 420 mm / 6,2 W | LNMP | 42-E | | 5957 | 66 | |
| | | For surcharge (MP-LMP) also available as lighted design for wall units. | 720 mm / 10,85 W | LNMP | 72-E | | 5958 | 73 | |
| USA CAN F |  | LED recess light Stabi-Line | 560 mm / 5,3 W | LNSTL | 56 | | 5510 | 203 | |
| | | aluminium housing, stainless steel appearance | 860 mm / 8 W | LNSTL | 86 | | 5512 | 234 | |
| | | plexiglas cover in satin finish | | | | | | | |
| | | LED - 12 V DC, 4000 K | | | | | | | |
| | | depth: 20 mm, height: 16 mm | | | | | | | |
| | | 1700 mm connection cable to power supply set | | | | | | | |
| | | 1 LED power supply set | | | | | | | |
| | | 1 switch with power cable / 230 V | | | | | | | |
| | | For mounting beneath wall units. | | | | | | | |
| | | Energy efficiency rating F | | | | | | | |
| | | For use as individual light - refer to accessories list, page Z 4.14. | | | | | | | |
| | | LED recess light Stabi-Line, as above, | 560 mm / 5,3 W | LNSTL | 56 | -E | 5511 | 123 | |
| | | however as supplement | 860 mm / 8 W | LNSTL | 86 | -E | 5513 | 150 | |

| Lighting | | Abbreviation | | Width in cm | Order No. | Points | |
|--|--|--|-----------------|-------------|-----------|--------|----|
| | | | | | | | |
| Ambience illumination | | | | | | | |
| <div>USA</div> <div>CAN</div> <div>F</div> |  | Glass shelves with LED glass edge lighting for wall units with glass doors | 450 mm / 0,96 W | GB-WSG | 45 | 15067 | 48 |
| | | Glass shelf 8 mm thick, depth 305 mm | 500 mm / 0,96 W | GB-WSG | 50 | 15068 | 51 |
| | | with matt edge | 600 mm / 1,2 W | GB-WSG | 60 | 15069 | 66 |
| | aluminium light profile with LED 12 V DC, 3200 K | | | | | | |
| | 1700 mm connection cable to power supply set | | | | | | |
| | Energy efficiency rating F | | | | | | |
| | Not suitable for 2-door wall units. | | | | | | |
| | Not permitted for use with Climber. | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

| Lighting | | | | Abbreviation | | Order No. | Points |
|--|---|--|------------------|--------------|-------|-----------|--------|
| | | | | Width in cm | | | |
| <div>USA</div> <div>CAN</div> <div>2700K-6500K</div> <div>F</div> |  | LED lighted wall shelf Vela housing in aluminium, stainless steel appearance | 450 mm / 6,98 W | WBLF | 45 | 15114 | 158 |
| | | LED - 12 V DC, 2700 - 6500 K | 500 mm / 7,8 W | WBLF | 50 | 15115 | 172 |
| | | 1700 mm connection cable with starter set | 600 mm / 9,3 W | WBLF | 60 | 15116 | 196 |
| | | depth: 184 mm, height: 62 mm | 800 mm / 12,4 W | WBLF | 80 | 15118 | 237 |
| | | max. load capacity: 1 kg / 100 mm | 900 mm / 13,95 W | WBLF | 90 | 15119 | 256 |
| | | Energy efficiency rating F | 1000 mm / 15,5 W | WBLF | 100 | 15120 | 282 |
| | | <i>LED starter and follow-up sets are not included in the scope of delivery - refer to accessories list, page Z 4.13.</i> | 1200 mm / 18,6 W | WBLF | 120 | 15122 | 314 |
| <div>F</div> |  | LED unit interior light Detroit for base units with integrated sensor switch. | | LSID | 30 | 15143 | 105 |
| | | Aluminium housing with Plexiglas cover in satin finish | 400 mm / 3,3 W | LSID | 40 | 15144 | 107 |
| | | LED - 12 V DC, 4000 K | 450 mm / 3,9 W | LSID | 45 | 15147 | 108 |
| | | depth: 30 mm, height: 15 mm | 500 mm / 4,2 W | LSID | 50 | 15145 | 111 |
| | | 1700 mm connection cable to power supply set | 600 mm / 5,5 W | LSID | 60 | 15146 | 134 |
| | | Energy efficiency rating F | 800 mm / 7,8 W | LSID | 80 | 15148 | 140 |
| | | <i>LED power supply set is not included in delivery.</i> | 900 mm / 9,1 W | LSID | 90 | 15149 | 143 |
| | | <i>suitable set: ESS6-LED (5401) - refer to accessories list, page Z 4.14.</i> | 1000 mm / 10,1 W | LSID | 100 | 15150 | 165 |
| | | 1200 mm / 12,7 W | LSID | 120 | 15152 | 177 | |
| |  | LED plinth light stainless steel frame 1.5 mm, glass cover white | | LSO | | 5980 | 41 |
| LED - 0.35 W / 12 V DC, 2700 - 6500 K, 1700 mm connection cable to starter set dimensions: 70 x 70 mm built-in depth: 9 mm, drill diameter: 55 mm. For mounting in plinth panels. No energy efficiency rating due to the low wattage. <i>For use as individual light - refer to accessories list, page Z 4.13.</i> | | | | | | | |
| <div>2700K-6500K</div> <div>G</div> |  | LED plinth light set 3 LED plinth lights (model 5980) 1 LED starter set with Emotion dimmer | | LSO-SET | | 5981 | 162 |
| | | | | | | | |
| | | LED plinth light Plastic profile, Grey, self-adhesive with integrated LED rope light, can be shortened every 75 mm (rope light is marked), LED - 12 V DC, 2700 - 6500 K, 2 x 1700 mm connection cable to starter set, height: 4 mm, depth: 20 mm Energy efficiency rating G <i>LED starter set LSET30/60(-F), LSETR30/60-F, LSET 60-4K and follow-up set LFSET30/60 are not included in the scope of delivery.</i> <i>Do not use beneath dishwashers!</i> | 2200 mm / 16 W | LSOP | 220 | 5932 | 101 |
| | | | 3350 mm / 24 W | LSOP | 335 | 5933 | 147 |

| Lighting | | Abbreviation | Width in cm | Order No. | Points | |
|------------------------|---|---|-------------|-----------|--------|-----|
| | | | | | | |
| Accessories for lights | | | | | | |
| |  | LED Power Supply Set LED converter 30 W /12 V DC 1800 mm long connection cable with AMP 6 input distributor 2000 mm power cable with plug | ESS6-LED | | 5401 | 42 |
| |  | LED extension cable, 1800 mm for extending the connection cable to the power supply | VK-LED | | 5273 | 10 |
| USA CAN |  | Triple distributor for 230 V 300 mm connection cable with Euro flat coupling, triple 1900 mm power cable with plug <i>Not suitable for LA* and LNAL*.</i> | LVT3 | | 5298 | 15 |
| USA CAN |  | Rocker switch for 230 V 1800 mm long connection cable with Euro flat coupler 1800 mm power cable with plug width: 40 mm, length: 35 mm, height: 15 mm | NK | | 7084 | 25 |
| USA CAN |  | Sensor switch for 220 V for touchless switching 1800 mm long connection cable for sensor 1800 mm long connection cable with Euro flat coupler 1800 mm power cable with plug <i>Lights and transformers up to 450 Watt can be switched.</i> | SEN220 | | 5299 | 76 |
| USA CAN |  | Remote control set for lights Sender and Receiver with Euro flat coupler and Euro flat plug | FUNK | | 5200 | 98 |
| |  LSET30 | LED starter set, comprised of: 1000 mm connection with Emotion dimmer LED converter 30 W / 12 V DC 2000 mm connection cable with 6 input distributor 2000 mm power cable with plug | LSET30 | | 5947 | 117 |
| |  LSET60 | as above, however for LED converter 60 W / 12 V DC 12 input distributor <i>The splash-proof safety box Glasgow SIBOX is required for use in bathrooms!</i> <i>Required for MP-LA, MP-LED, MP-WOGL, MP-LNP-O/U, MP-LMP-O/U, MP-LAN, MP-LLIN, MP-WBL, MP-NGML, MP-RLA, MP-NVLA, MP-LWV, MP-LWH.</i> | LSET60 | | 5948 | 152 |
| |  LSET30-F LSET60-F | LED starter set with Emotion radio remote control, comprising of: LED control unit 30 W / 12 V DC includes radio receiver and 6 input distributor 2000 mm power cable with plug 1 Emotion radio remote control | LSET30-F | | 15002 | 140 |
| | | as above, however LED control unit 60 W / 12 V DC <i>The splash-proof safety box Glasgow SIBOX is required for use in bathrooms!</i> <i>Required for MP-LA, MP-LED, MP-WOGL, MP-LNP-O/U, MP-LMP-O/U, MP-LAN, MP-LLIN, MP-WBL, MP-NGML, MP-RLA, MP-NVLA, MP-LWV, MP-LWH.</i> | LSET60-F | | 15086 | 147 |


| Lighting | | | Abbreviation | Width in cm | Order No. | Points |
|------------|--|---|--------------|-------------|-----------|--------|
| | | | | | | |
| USA CAN |  LSETR30-F LSETR60-F | LED starter set with round Emotion radio remote control, consisting of: LED control unit 30 W / 12 V DC includes radio receiver and 6 input distributor 2000 mm power cable with plug 1 round Emotion radio remote control | LSETR30-F | | 15083 | 128 |
| | | as above, however LED control unit 60 W / 12 V DC <i>The splash-proof safety box Glasgow SIBOX is required for use in bathrooms!</i> <i>Required for MP-LA, MP-LED, MP-WOGL, MP-LNP-O/U, MP-LMP-O/U, MP-LAN, MP-LLIN, MP-WBL, MP-NGML, MP-RLA, MP-NVLA, MP-LWV, MP-LWH.</i> | LSETR60-F | | 15084 | 143 |
| USA CAN |  LSET60-4K | LED starter set with 4 channel Emotion radio remote control, consisting of: 4 channel light scenario control with 4 x 6 input distributors 4 LED extension cable 1800 mm LED converter 60 W / 12 V DC 2000 mm power cable with plug 4-channel Emotion radio-controlled remote operation with manual toggling of the 4th channel for the plant light Once the 4th channel has been activated, it can no longer be dimmed and the light colour can no longer be changed. It switches off automatically after 8 hours. <i>The splash-proof safety box Glasgow SIBOX is required for use in bathrooms!</i> <i>Required for MP-LA, MP-LED, MP-WOGL, MP-LNP-O/U, MP-LMP-O/U, MP-LAN, MP-LLIN, MP-WBL, MP-NGML, MP-RLA, MP-NVLA, MP-LWV, MP-LWH.</i> | LSET60-4K | | 15004 | 231 |
| |  LFSET30 | LED follow-up set, comprised of: LED converter 30 W / 12 V DC with repeater for synchronous operation 450 mm connection cable with 6 input distributor 2000 mm power cable with plug | LFSET30 | | 5949 | 110 |
| |  LFSET60 | as above, however for LED converter 60 W / 12 V DC 12 input distributor <i>The splash-proof safety box Glasgow SIBOX is required for use in bathrooms!</i> <i>To supplement the LED starter set LSET30(60), LSET30(60)-F, LSET60-4K and follow-up set LFSET30 with more than 6 lights or for exceeding the wattage of the starter set.</i> | LFSET60 | | 5996 | 143 |
| USA CAN |  LMWS | LED microwave sensor 500 mm line with Euro coupler 2000 mm power cable with plug Sensor range: 0 - 8000 mm Coverage angle: 130° Maximum runtime: 10 sec - 10 min <i>Motion sensor for LED starter sets LSET30/60-F, LSETR30/60-F, LSET60-4K, follow-up set LFSET30/60 and LED power supply set ESS65-LED.</i> <i>Not possible behind mirrored doors.</i> | LMWS | | 15081 | 61 |
| |  | Safety box Glasgow aluminium housing in black, includes end caps, Splash-proof rating IP 44, dimensions (H x W x D): 19 x 453 x 103 mm <i>For LED converters for use in bathrooms, in the pole-mounted shelving system or in the Smartcube shelving system.</i> <i>Max. 1 converter per box.</i> | SIBOX | | 15195 | 23 |

| Lighting | | Abbreviation | Width in cm | Order No. | Points |
|---|--|--------------|-------------|-----------|--------|
| | | | | | |
|  |  <p>Gateway Control of all Emotion lighting via smart phones or tablets. <i>To supplement the 4 channel Emotion radio remote control.</i></p> | GATE | | 15005 | 178 |
| |  <p>Emotion home base Gateway for connecting LED starter sets with Emotion radio remote control LSET30/60-F, LSETR30/60-F to smart home networks. Control via voice command, App or remote control, voice control only in conjunction with a Zigbee hub and a smart speaker, controls up to 4 groups of lights. Existing lighting controls can easily be retrofitted. Input voltage: 230 V AC Operating voltage: 5 V Radio frequency: 2.4 GHz Radio standard: Zigbee 3.0 Protection rating: IP 20 Material: plastic / White Connection: Wall power supply Cable length: 1000 mm</p> | EMHB | | 15080 | 201 |


| Lighting | | Abbreviation | | Order No. | Points |
|----------|--|--------------|--|-----------|--------|
| | | Width in cm | | | |
| | <p>Wattage for LED lighted designs in wall units and wall shelves</p> <p>MP-LA and MP-LAN: unit width 300 mm: 2.31 W unit width 350 mm: 3.00 W unit width 400 mm: 3.86 W unit width 450 mm: 4.64 W unit width 500 mm: 5.41 W unit width 550 mm: 6.19 W unit width 600 mm: 6.96 W unit width 800 mm: 10.06 W unit width 900 mm: 11.61 W unit width 1000 mm: 13.16 W unit width 1200 mm: 15.87 W</p> <p>MP-WOGL and MP-LLIN : unit width 300 mm: 5.83 W unit width 350 mm: 7.04 W unit width 400 mm: 8.16 W unit width 450 mm: 9.32 W unit width 500 mm: 10.49 W unit width 550 mm: 11.65 W unit width 600 mm: 12.82 W unit width 800 mm: 17.48 W unit width 900 mm: 19.81 W unit width 1000 mm: 22.14 W unit width 1200 mm: 26.80 W</p> <p>MP-LED: unit width 300 mm: 3.49 W unit width 350 mm: 4.60 W unit width 400 mm: 5.04 W unit width 450 mm: 5.81 W unit width 500 mm: 6.59 W unit width 550 mm: 7.36 W unit width 600 mm: 8.14 W unit width 800 mm: 11.24 W unit width 900 mm: 12.79 W unit width 1000 mm: 14.34 W unit width 1200 mm: 17.50 W</p> <p>MP-LNP: unit width 200 - 600 mm: 3.0 W unit width 800 - 1200 mm: 2 x 3.0 W</p> <p>MP-LMP and MP-WBL: unit / shelf width 300 / 400 mm: 3.1 W unit / shelf width 450 / 500 mm: 4.65 W unit / shelf width 550 / 600 / 650 mm: 6.2 W unit / shelf width 800 mm: 9.3 W unit / shelf width 900 mm: 10.85 W unit / shelf width 1000 mm: 12.4 W unit / shelf width 1200 mm: 15.5 W</p> <p>MP-LP and MP-WBLP: unit / shelf width 300 / 400 mm: 3 W unit / shelf width 450 / 500 mm: 4.5 W unit / shelf width 550 / 600 / 650 mm: 6 W unit / shelf width 800 mm: 9 W unit / shelf width 900 mm: 10.5 W unit / shelf width 1000 mm: 12 W unit / shelf width 1200 mm: 15 W</p> | | | | |

| Lighting | | Abbreviation | | Order No. | Points |
|----------|--|--------------|--|-----------|--------|
| | | Width in cm | | | |
| | <p>Wattage for LED lighted designs in shelf units, niche claddings and upright panels</p> <p>MP-RLA: shelf width 150 mm: 0.78 W shelf width 200 mm: 1.17 W shelf width 300 mm: 1.95 W shelf width 400 mm: 2.73 W shelf width 450 mm: 3.12 W shelf width 500 mm: 3.51 W shelf width 600 mm: 4.29 W</p> <p>MP-NGML and NGMLB: per every 1000 mm length: 7.8 W</p> <p>MP-NVLA and NKPL: per every 1000 mm length: 12 W</p> <p>MP-RSBLP: shelf width 300 / 400 mm: 3 W shelf width 450 / 500 mm: 4.5 W shelf width 600 mm: 6 W shelf width 800 mm: 9 W shelf width 900 mm: 10.5 W</p> <p>MP-RSBL: shelf width 300 / 400 mm: 3.1 W shelf width 450 / 500 mm: 4.65 W shelf width 600 mm: 6.2 W shelf width 800 mm: 9.3 W shelf width 900 mm: 10.85 W</p> <p>MP-LWV: upright panel height 288 mm: 2.25 W upright panel height 360 mm: 2.80 W upright panel height 432 mm: 3.37 W upright panel height 554 mm: 4.32 W upright panel height 576 mm: 4.49 W upright panel height 720 mm: 5.60 W upright panel height 754 mm: 5.88 W upright panel height 792 mm: 6.18 W upright panel height 864 mm: 6.74 W upright panel height 1152 mm: 8.98 W upright panel height 1239 mm: 9.66 W upright panel height 1247 mm: 9.73 W upright panel height 1296 mm: 10.12 W upright panel height 1330 mm: 10.37 W upright panel height 1402 mm: 10.93 W upright panel height 1485 mm: 11.58 W upright panel height 1584 mm: 12.35 W upright panel height 1997 mm: 15.57 W upright panel height 2069 mm: 16.14 W upright panel height 2088 mm: 16.29 W upright panel height 2160 mm: 16.85 W</p> <p>MP-SRL: highboard height, 1485 mm: 18.5 W highboard height XL, 1584 mm: 19.4 W tall unit height 1, 1997 mm: 24.6 W tall unit height 1 XL, 2069 mm: 25.5 W dresser unit height 1, 1239 mm: 14.8 W</p> <p>MP-LWSP: end upright: 8.52 W</p> <p>MP-LADB: top shelf width 600 - 636 mm: 6.2 W top shelf width 800 - 836 mm: 9.3 W top shelf width 900 - 936 mm: 10.58 W top shelf width 1000 - 1036 mm: 12.4 W top shelf width 1200 - 1236 mm: 15.5 W</p> | | | | |

LED lighting with Emotion technology

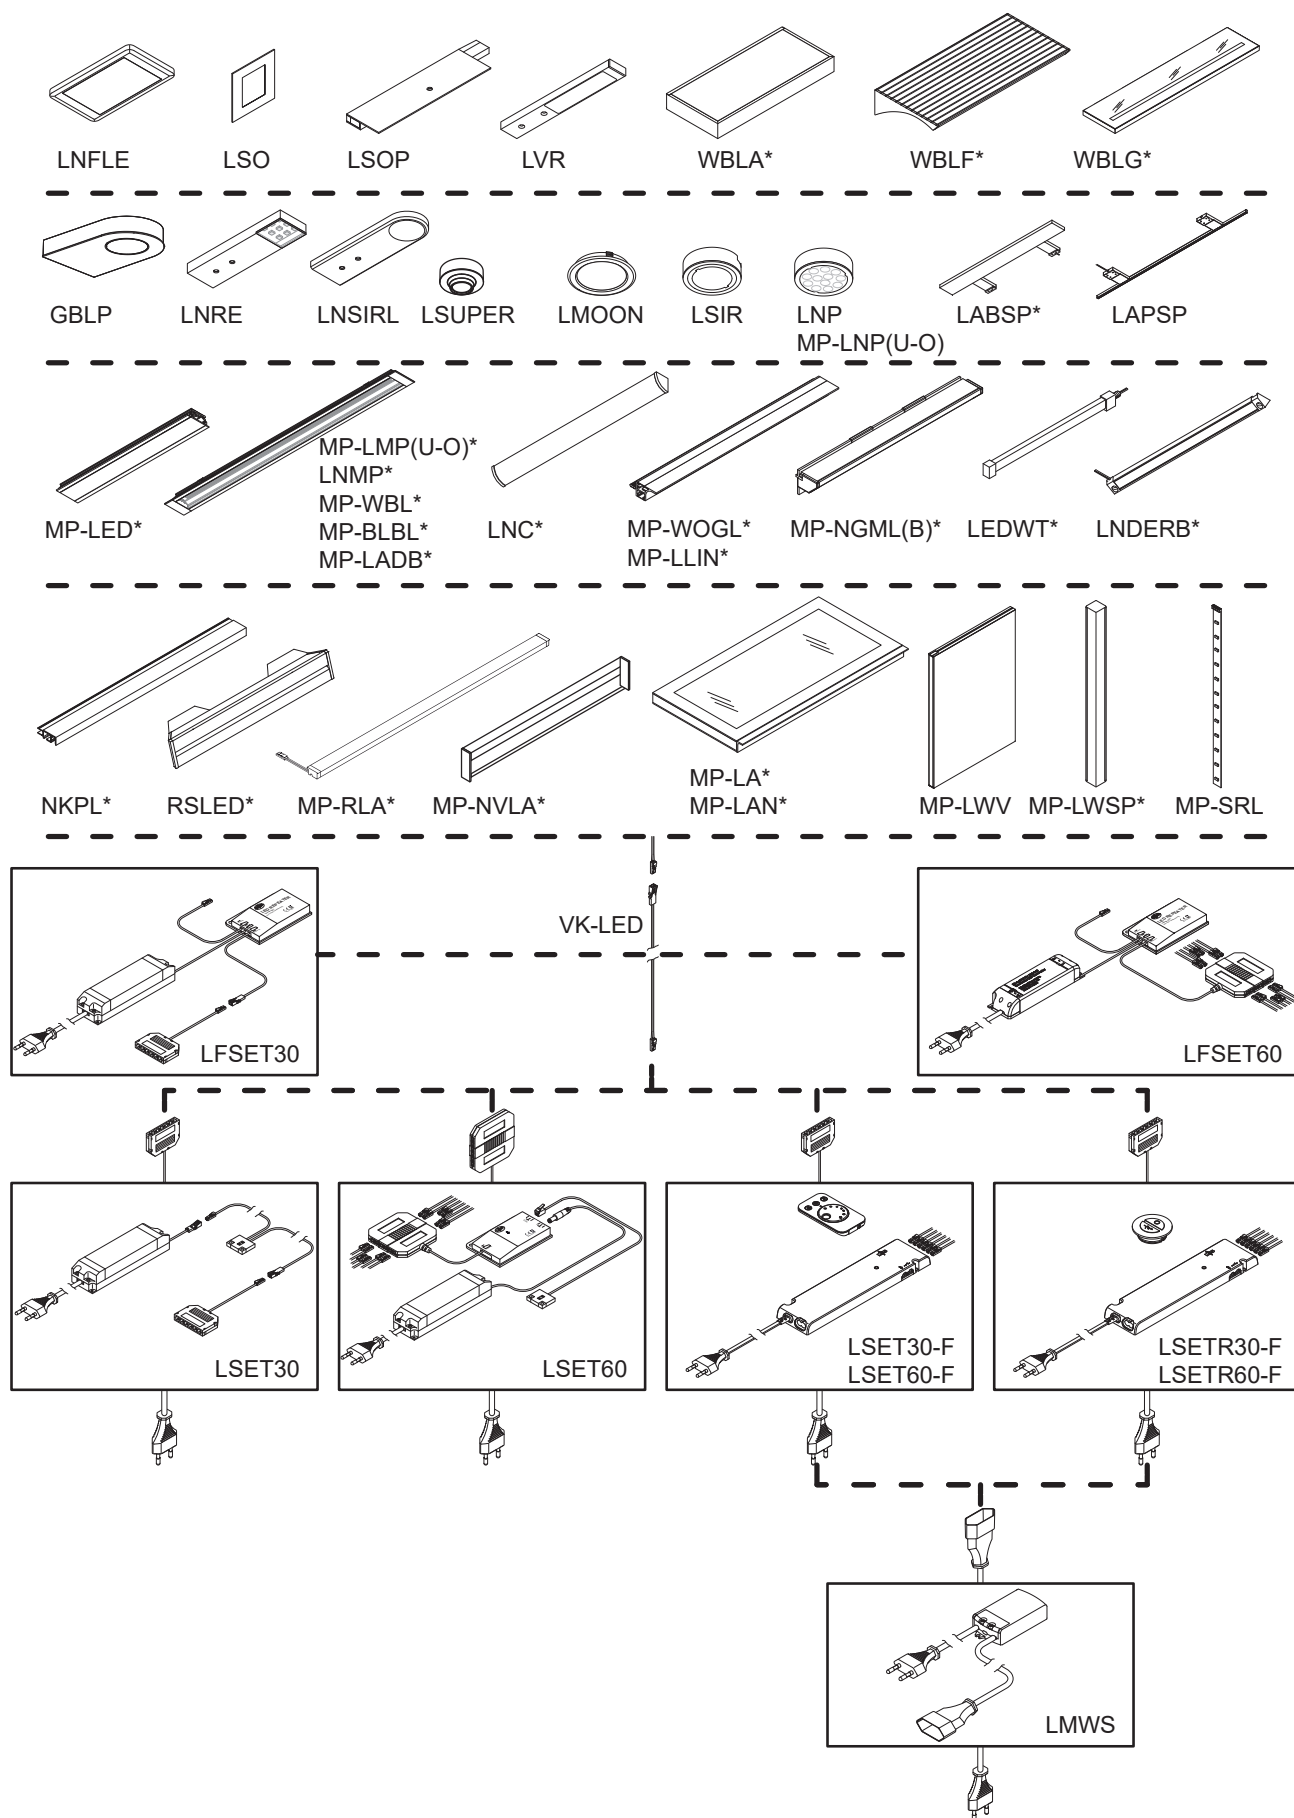


LED lighting without Emotion technology

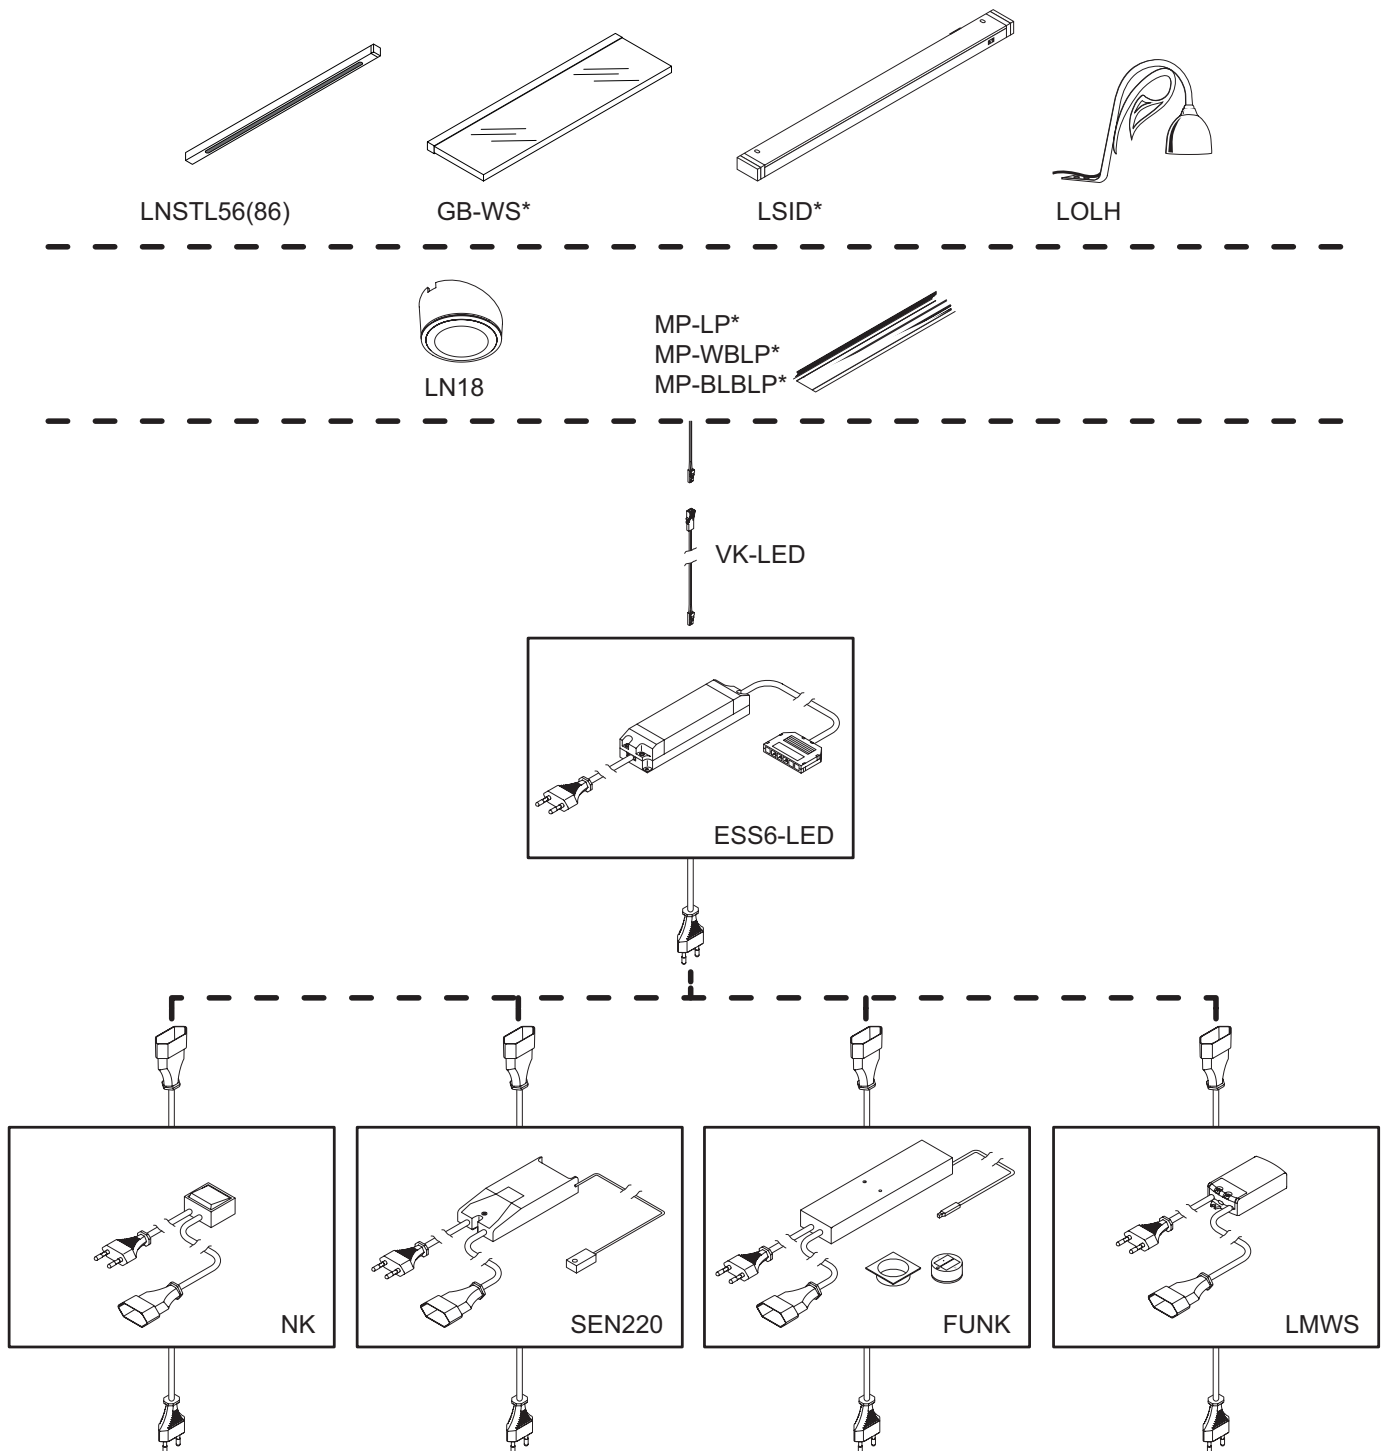

Country approval for electrified accessories


Electrified accessories / furniture items are generally approved for the EU or European Economic Area EEA (= EU + Norway, Liechtenstein, Iceland).

Sockets overview




Sockets - model F

for Bulgaria, Germany, Estonia, Finland, Greece, Iceland, Croatia, Latvia, Lithuania, Luxembourg, Netherlands, Norway, Austria, Portugal, Romania, Sweden, Slovenia, Spain, Hungary




Sockets - model E

for Belgium, France, Poland, Slovakia, the Czech Republic, French Guiana, French Polynesia, New Caledonia, Réunion




Sockets - model G

for Great Britain, Ireland, Malta, Cyprus




Sockets - model K

for Denmark




Sockets - model L

for Italy



Sockets - model I


for Australia, New Zealand



16A - T23

Sockets - model J





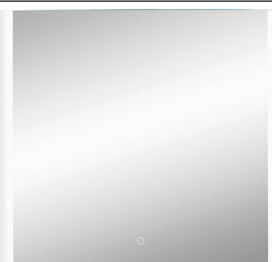
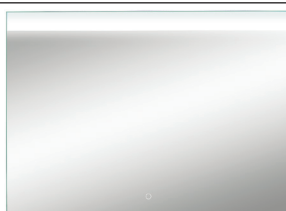
for Liechtenstein, Switzerland


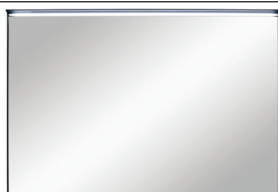



Sockets - model B

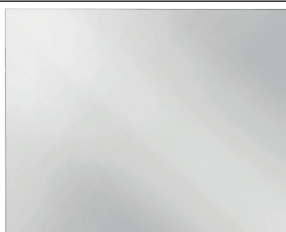

for Canada, Taiwan, USA






An updated overview of additional country approvals can be found in the nobilia Extranet.

| Mirror / Bathroom accessories | | | | Abbreviation | | | | |
|--------------------------------|---|--|----------|--------------|-------|-------|-----|--|
| | | | | | | | | |
| Mirror | | | | | | | | |
| NEW |  | Mirror with side bevel 720 mm high, 40 mm deep, on backing material, all around with polymer edge in carcase colour, with side bevel. As optional lighting we recommend the LED attachment light LAPSP. The LED starter set can be stored behind the mirror. <i>Please specify carcase colour.</i> | SPL-FAC | 40 | 15244 | 110 | | |
| | | | SPL-FAC | 60 | 15246 | 123 | | |
| | | | SPL-FAC | 80 | 15248 | 131 | | |
| | | | SPL-FAC | 90 | 15249 | 140 | | |
| | | | SPL-FAC | 100 | 15250 | 150 | | |
| | | | SPL-FAC | 120 | 15252 | 164 | | |
| NEW |  | Mirror with side bevel 1584 mm high, 40 mm deep, on backing material, all around with polymer edge in carcase colour, with side bevel. As optional lighting we recommend the LED attachment light LAPSP. The LED starter set can be stored behind the mirror. <i>Please specify carcase colour.</i> | SPLG-FAC | 40 | 15254 | 155 | | |
| | | | SPLG-FAC | 60 | 15256 | 175 | | |
| | | | SPLG-FAC | 80 | 15258 | 204 | | |
| USA CAN 2700K-6500K G |  | Mirror with vertical LED lights 850 mm high, 24 mm deep, 2 sandblasted vertical LED lights, LED 18 W / 12 V DC, 2700 - 6500 K, 1 Emotion touch control dimmer, 1 LED converter 30 W / 12 V DC IP 44 Energy efficiency rating G | SPLV | 60 | 15171 | 441 | | |
| | | | SPLV | 80 | 15172 | 438 | | |
| | | | SPLV | 90 | 15173 | 447 | | |
| | | | SPLV | 100 | 15174 | 456 | | |
| | | | SPLV | 120 | 15175 | 467 | | |
| USA CAN 2700K-6500K G |  | Mirror with horizontal LED lights 850 mm high, 24 mm deep, 1 sandblasted LED light, LED 12 V DC, 2700 - 6500 K, 1 Emotion touch control dimmer, 1 LED converter 15 W / 12 V DC IP 44 Energy efficiency rating G | 6 watts | SPLH | 60 | 15176 | 317 | |
| | | | 8 watts | SPLH | 80 | 15177 | 343 | |
| | | | 10 watts | SPLH | 90 | 15178 | 355 | |
| | | | 11 watts | SPLH | 100 | 15179 | 369 | |
| | | | 13 watts | SPLH | 120 | 15180 | 399 | |
| USA CAN F |  | Mirror EMMA TOUCH with LED lights 720 mm high, 25 mm deep, 2 sandblasted LED light windows, 40 mm wide, LED - 22 W, 5700 K, protection class IP 44, 1 aluminium frame, 1 touch sensor, 1 connection cable / 230 - 240 V Energy efficiency rating F | SP-EMMA | 41 | 15204 | 242 | | |
| | | | SP-EMMA | 60 | 15206 | 248 | | |
| | | | SP-EMMA | 80 | 15208 | 257 | | |
| | | | SP-EMMA | 90 | 15209 | 263 | | |
| | | | SP-EMMA | 100 | 15210 | 269 | | |
| | | | SP-EMMA | 120 | 15212 | 241 | | |
| USA CAN F |  | Mirror DEVA TOUCH with LED lights 720 mm high, 25 mm deep, 1 sandblasted LED light window, 70 mm wide, LED - 12 V DC, 5700 K, protection class IP 44, 1 aluminium frame, 1 touch sensor, 1 connection cable / 230 - 240 V Energy efficiency rating F | 7 watts | SP-DEVA | 41 | 15214 | 203 | |
| | | | 10 watts | SP-DEVA | 60 | 15216 | 207 | |
| | | | 12 watts | SP-DEVA | 80 | 15218 | 222 | |
| | | | 13 watts | SP-DEVA | 90 | 15219 | 237 | |
| | | | 15 watts | SP-DEVA | 100 | 15220 | 242 | |
| | | | 16 watts | SP-DEVA | 120 | 15222 | 257 | |

| Mirror / Bathroom accessories | | | | Abbreviation | | Width in cm | Order No. | Points |
|--|--|--|-----------|--------------|-------|-------------|-----------|--------|
| | | | | | | | | |
| <div><div>USA</div><div>CAN</div></div> <div>F</div> |  | Mirror SOFIA with LED lights | 12 watts | SP-SOFIA | 60 | 15201 | 201 | |
| | | diameter 600/750 mm, 25 mm deep, 1 circumferential sandblasted LED light window, 40 mm wide, LED - 12 V DC, 5700 K, protection rating IP 44, 1 touch sensor, 1 LED converter 12 V DC Energy efficiency rating F | 20 watts | SP-SOFIA | 75 | 15202 | 245 | |
| <div><div>USA</div><div>CAN</div></div> <div>G</div> |  | Mirror with LED light | 5,7 watts | SPLAR | 40 | 15224 | 410 | |
| | | 720 mm high, 146 mm deep, aluminium frame, 1 shelf 111 mm, LED lights top and bottom, LED - 24 V DC / 2700-6400 K, protection class IP 44, 1 sensor dimmer 1000x DIM, on right side, 1 LED converter 24 V DC Energy efficiency rating G | 9 watts | SPLAR | 60 | 15226 | 448 | |
| | | 12,3 watts | SPLAR | 80 | 15228 | 489 | | |
| | | 13,8 watts | SPLAR | 90 | 15229 | 524 | | |
| | | 15,3 watts | SPLAR | 100 | 15230 | 558 | | |
| | | 18,6 watts | SPLAR | 120 | 15232 | 602 | | |
| <div><div>USA</div><div>CAN</div></div> <div>G</div> |  | Mirror with LED light | 5,7 watts | SPLARG | 40 | 15234 | 634 | |
| | | 1584 mm high, 146 mm deep, aluminium frame, 1 shelf 111 mm, LED - light top and bottom, LED - 24 V DC / 2700-6400 K, protection class IP 44, 1 sensor dimmer 1000x DIM, on right side, 1 LED converter 24 V DC Energy efficiency rating G | 9 watts | SPLARG | 60 | 15236 | 698 | |
| | | 12,3 watts | SPLARG | 80 | 15238 | 756 | | |
| | | as above, however without light | SPARA | 40 | 15240 | 511 | | |
| | | Available in: 010 Black 193 Alpine white | SPARA | 60 | 15241 | 566 | | |
| | | | SPARA | 80 | 15242 | 628 | | |

Accessories for mirrored cabinets WBSP* and mirrors

| | | | | | | | | |
|---|--|---|--------------------|-------|-----|--|-------|-----|
| <div>USA</div> <div>CAN</div> <div>2700K-6500K</div> <div>F</div> |  | LED attachment light Lilium Big Emotion, for planning on mirrored bathroom cabinets WBSP* aluminium housing in stainless steel appearance, Plexiglas cover in satin finish, LED 12 V DC, 2700 - 6500 K 1700 mm connection cable to starter set, Energy efficiency rating F / Protection rating IP 44 <i>LED starter sets LSET30/60(-F), LSETR30/60-F, LSET60-4K and follow-up set LFSET30/60 are not included in the scope of delivery.</i> | 500 mm / 10 watts | LABSP | 50 | | 15196 | 96 |
| | | | 700 mm / 14 watts | LABSP | 70 | | 15197 | 108 |
| | | | 800 mm / 16 watts | LABSP | 80 | | 15198 | 118 |
| | | | 900 mm / 18 watts | LABSP | 90 | | 15199 | 126 |
| | | | 1100 mm / 22 watts | LABSP | 110 | | 15200 | 140 |
| | | | | | | | | |
| <div>USA</div> <div>CAN</div> <div>2700K-6500K</div> <div>G</div> |  | LED attachment light aluminium housing, height: 10 mm, depth: 86.4 mm, Plexiglas cover in satin finish, LED - 12 V DC, 2700 - 6500 K, 1700 mm connection cable to starter set, Energy efficiency rating G / Protection rating IP 44 Available in: 014 Stainless steel appearance, 010 Black <i>LED starter sets LSET30/60(-F), LSETR30/60-F, LSET60-4K and follow-up set LFSET30/60 are not included in the scope of delivery.</i> | 5 watts | LAPSP | 50 | | 15181 | 67 |
| | | | 7 watts | LAPSP | 70 | | 15182 | 79 |
| | | | 8 watts | LAPSP | 80 | | 15183 | 89 |
| | | | 9 watts | LAPSP | 90 | | 15184 | 93 |
| | | | 11 watts | LAPSP | 110 | | 15185 | 101 |
| | | | | | | | | |

| Mirrors / accessories for mirrored cabinets and mirrors | | | | | Abbreviation | Width in cm | Order No. | Points |
|---|---|--|------------|---------|--------------|-------------|-----------|--------|
| | | | | | | | | |
| <div>2700K-6500K</div> <div>G</div> |  | LED recess light Derby II | 6,6 watts | LNDERB | 56 | 15056 | 53 | |
| | | Aluminium profile Stainless steel appearance or Black with integrated LED light strip | 8,7 watts | LNDERB | 74 | 15057 | 58 | |
| | | LED 12 V DC, 2700 - 6500 K | 10,5 watts | LNDERB | 88 | 15058 | 61 | |
| | | 2000 mm connection cable to starter set | 12,2 watts | LNDERB | 102 | 15059 | 67 | |
| | | Energy efficiency rating G / Protection rating IP44 for mounting beneath mirrored bathroom cabinets. Available in: 014 Stainless steel appearance, 010 Black <i>LED starter sets LSET30/60(-F), LSETR30/60-F, LSET60-4K and follow-up set LFSET30/60 are not included in the scope of delivery.</i> <i>If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.</i> | | | | | | |
| |  | Double socket for mounting in mirrored bathroom cabinets WBSP* Double socket with contact protection, plastic housing silver colour, 1600 mm power cable without plug, Protection rating IP 44 Sockets - model F | | DSDSP-F | | 33318 | 51 | |
| | | Sockets - model E | | DSDSP-E | | 33319 | 51 | |
| | | Sockets - model J without contact protection | | DSDSP-J | | 33321 | 58 | |
| Towel rails | | | | | | | | |
| |  | Towel rail matches bow handle no. 190 For mounting on the sides of bathroom furniture in 461 mm side depth, drill spacing: 320 mm, dimensions (H x W x D): 50 x 18 x 329 mm. Screws for mounting are included in the scope of delivery. Available colours: 044 Brilliant chrome | | HTHS190 | | 3319 | 22 | |
| |  | Towel rail matches railing handle no. 650 For mounting on the sides of bathroom furniture in 461 mm side depth, drill spacing: 320 mm, 50 mm high, 340 mm wide, Screws for mounting are included in the scope of delivery. Available colours: 014 Stainless steel finish | | HTHS650 | | 3320 | 44 | |
| |  | Towel rail matches railing handle no. 620 For mounting on the sides of bathroom furniture in 461 mm side depth, drill spacing: 320 mm, 50 mm high, 340 mm wide, Screws for mounting are included in the scope of delivery. Available colours: 010 Black | | HTHS620 | | 3321 | 47 | |


Bathroom accessories

| Abbreviation |
|--------------|
| Width in cm |

Order No.

| Points |
|--------|
|--------|

NEW

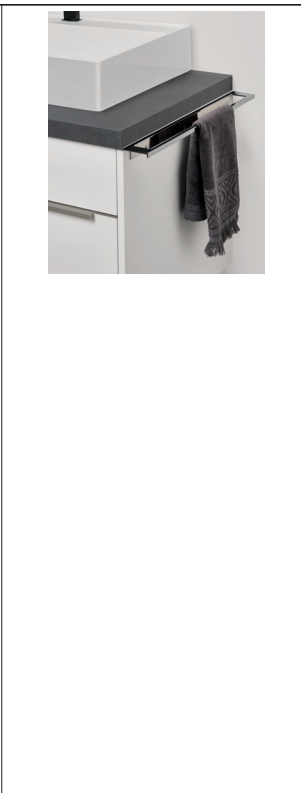

WKON

-46

3313

241

NEW













WKON






-46

3313

241



| Bathroom accessories | | | Abbreviation | | Width in cm | Order No. | Points |
|---------------------------------------|---|---|---|----------------------------|-------------------|----------------------|-------------------|
| | | | | | | | |
| |  | Towel rail, stainless steel finish 2 pieces with mounting plate, 2 knurled screws drill spacing: 392 mm dimensions: 457 x 40 mm, 12 mm Ø | DTH | | | 9412 | 20 |
| Accessories and interior organisation | | | | | | | |
| NEW |  | Steel plinth sled frame 2 pieces, 550 mm deep, for planning beneath bathroom base units in 561 mm side depth | 156 mm high 300 mm high 444 mm high | SOKU16 SOKU30 SOKU44 | -56 -56 -56 | 3325 3326 3328 | 190 200 210 |
| | | Plinth sled frame as above, but 2 pcs., 450 mm deep for planning beneath bathroom base units in 461 mm side depth | 156 mm high 300 mm high 444 mm high | SOKU16 SOKU30 SOKU44 | -46 -46 -46 | 3410 3411 3412 | 175 187 197 |
| | | Plinth sled frame as above, however 2 pieces, 340 mm deep, for planning beneath bathroom sideboards and Midi units with 350 mm side depth | 156 mm high 300 mm high 444 mm high | SOKU16 SOKU30 SOKU44 | -35 -35 -35 | 3342 3343 3344 | 147 159 171 |
| | | Available colours: 010 Black 044 Brilliant chrome | | | | | |
| | | Sled frame heights and unit heights can be freely combined. DIN 68935 stipulates a height between 850 and 950 mm for hand basin top edges. | | | | | |
| | | Thus, the proper sled frame height for hand basin solutions is calculated as follows: sled frame height + unit height + cover panel height + hand basin height | | | | | |
| | | <i>The plinth sled frames are not load-bearing and are thus only suitable for wall-mounted furniture.</i> | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| |  | Steel plinth feet, 2 pieces for planning beneath bathroom base units | 156 mm high 300 mm high 444 mm high | SOFU16 SOFU30 SOFU44 | | 3402 3403 3404 | 114 117 118 |
| | | Available colours: 010 Black 044 Brilliant chrome | | | | | |
| | | Plinth foot heights and unit heights can be freely combined. DIN 68935 stipulates a height between 850 and 950 mm for hand basin top edges. | | | | | |
| | | Thus, the proper plinth foot height for hand basin solutions is calculated as follows: plinth foot height + unit height + cover panel height + hand basin height | | | | | |
| | | <i>The plinth sled frames are not load-bearing and are thus only suitable for wall-mounted furniture.</i> | | | | | |

| Bathroom accessories | | | | Abbreviation | | Width in cm | Order No. | Points | | | | | |
|-------------------------------------|--|---|--|--------------|------|-------------|-----------|-----------------------|------|-------|-----|------|-----|
| | | | | | | | | | | | | | |
| NEW |   | Steel plinth feet, 20 mm thick, for planning beneath bathroom base units up to 461 mm side depth. dimensions (H x W x D): 144 x 20 x 20 mm height adjustment: + 10 mm 4 corner feet are required for a continuous design. Available colours: 010 Black 044 Brilliant chrome <i>1 additional centre foot (SOFM) must be ordered for a unit depth of 800 mm or more and for each carcass side connection!</i> | 4 corner feet | SOFE-SET | SOFM | | 3340 | 112 | | | | | |
| | | | centre plinth | | | | 3341 | 35 | | | | | |
| NEW |   | Built-in waste collector Separate Bathroom, fits bathroom pull-out units 220 mm high, for pull-out depth 400 mm, consisting of: 1 x inner bin 6.5 litres, 1 x lid for inner bin, 2 x utensil holders, 1 x compartment divider for Orgaschacht, 1 x bin holder, metal 1 x side cover, metal for fixing when used in larger drawer widths <i>Not available with glass or steel side panelling MP-SVS (7978) or MP-SVG (7979) and unit interior lighting LSID.</i> | for 300 mm wide units | ASSB | ASSB | 30 | 40 | 3310 | 117 | | | | |
| | | | for 400 mm wide units | | | | | 3311 | 136 | | | | |
| | | | as above but, | | | | | for 300 mm wide units | ASSB | 30 | -56 | 3308 | 126 |
| | | | with 2 additional holders for hair dryers, Ø 65/80 mm for pull-out depth 500 mm <i>Not available with glass or steel side panelling MP-SVS (7978) or MP-SVG (7979) and unit interior lighting LSID.</i> | | | | | for 400 mm wide units | ASSB | 40 | -56 | 3309 | 145 |
| Bathroom lighting | | | | | | | | | | | | | |
| USA CAN 2700K-6500K F G |   | LED hand basin light for hand basin Marmite MEGX* LED rope light of translucent plastic, LED 12 V DC, 2700 - 6500 K 1700 mm connection cable to starter set LEDWT 160 / 180 Energy efficiency rating G LEDWT 200 / 220 Energy efficiency rating F Protection rating IP 67 LEDWT160: 1600 mm long / 16 watts LEDWT180: 1800 mm long / 18 watts LEDWT200: 2000 mm long / 20 watts LEDWT220: 2200 mm long / 22 watts <i>LED starter sets LSET30/60(-F), LSETR30/60-F, LSET60-4K and follow-up set LFSET30/60 are not included in the scope of delivery.</i> | für MEGX 600C ICC | LEDWT | 160 | 15060 | 72 | | | | | | |
| | | | für MEGX 800C ICC | | | | | LEDWT | 180 | 15061 | 79 | | |
| | | | für MEGX 1000C ICC | | | | | LEDWT | 200 | 15062 | 85 | | |
| | | | für MEGX 1200C ICC / D | | | | | LEDWT | 220 | 15063 | 92 | | |
| | | | | | | | | | | | | | |
| |  | Safety box Glasgow aluminium housing in black, includes end caps, Splash-proof rating IP 44, dimensions (H x W x D): 19 x 453 x 103 mm <i>For LED converters for use in bathrooms, in the pole-mounted shelving system or in the Smartcube shelving system.</i> <i>Max. 1 converter per box.</i> | | SIBOX | | 15195 | 23 | | | | | | |

| Bathroom accessories | | | Abbreviation | Width in cm | Order No. | Points |
|--|--|---|--------------|-------------|-----------|--------|
| | | | | | | |
| Additional lighting products can be found in chapter 4 lighting. | | | | | | |
| |  LSET30 | LED starter set, comprised of: 1000 mm connection with Emotion dimmer LED converter 30 W / 12 V DC 2000 mm connection cable with 6 input distributor 2000 mm power cable with plug | LSET30 | | 5947 | 117 |
| |  LSET60 | as above, however for LED converter 60 W / 12 V DC 12 input distributor <i>The splash-proof safety box Glasgow SIBOX is required for use in bathrooms!</i> <i>Required for MP-LA, MP-LED, MP-WOGL, MP-LNP-O/U, MP-LMP-O/U, MP-LAN, MP-LLIN, MP-WBL, MP-NGML, MP-RLA, MP-NVLA, MP-LWV, MP-LWH.</i> | LSET60 | | 5948 | 152 |
| |  LSET30-F LSET60-F | LED starter set with Emotion radio remote control, comprising of: LED control unit 30 W / 12 V DC includes radio receiver and 6 input distributor 2000 mm power cable with plug 1 Emotion radio remote control | LSET30-F | | 15002 | 140 |
| | | as above, however LED control unit 60 W / 12 V DC <i>The splash-proof safety box Glasgow SIBOX is required for use in bathrooms!</i> <i>Required for MP-LA, MP-LED, MP-WOGL, MP-LNP-O/U, MP-LMP-O/U, MP-LAN, MP-LLIN, MP-WBL, MP-NGML, MP-RLA, MP-NVLA, MP-LWV, MP-LWH.</i> | LSET60-F | | 15086 | 147 |
| USA CAN |  LSETR30-F LSETR60-F | LED starter set with round Emotion radio remote control, consisting of: LED control unit 30 W / 12 V DC includes radio receiver and 6 input distributor 2000 mm power cable with plug 1 round Emotion radio remote control | LSETR30-F | | 15083 | 128 |
| | | as above, however LED control unit 60 W / 12 V DC <i>The splash-proof safety box Glasgow SIBOX is required for use in bathrooms!</i> <i>Required for MP-LA, MP-LED, MP-WOGL, MP-LNP-O/U, MP-LMP-O/U, MP-LAN, MP-LLIN, MP-WBL, MP-NGML, MP-RLA, MP-NVLA, MP-LWV, MP-LWH.</i> | LSETR60-F | | 15084 | 143 |
| AUS NZL |  LSET60-4K | LED starter set with 4 channel Emotion radio remote control, consisting of: 4 channel light scenario control with 4 x 6 input distributors 4 LED extension cable 1800 mm LED converter 60 W / 12 V DC 2000 mm power cable with plug 4-channel Emotion radio-controlled remote operation with manual toggling of the 4th channel for the plant light Once the 4th channel has been activated, it can no longer be dimmed and the light colour can no longer be changed. It switches off automatically after 8 hours. <i>The splash-proof safety box Glasgow SIBOX is required for use in bathrooms!</i> <i>Required for MP-LA, MP-LED, MP-WOGL, MP-LNP-O/U, MP-LMP-O/U, MP-LAN, MP-LLIN, MP-WBL, MP-NGML, MP-RLA, MP-NVLA, MP-LWV, MP-LWH.</i> | LSET60-4K | | 15004 | 231 |

Bathroom accessories

Additional lighting products can be found in chapter 4 lighting.

| | | | Abbreviation | Width in cm | Order No. | Points |
|--|---|--|--------------|-------------|-----------|--------|
| | | | | | | |
|  LFSET30 | LED follow-up set, comprised of: LED converter 30 W / 12 V DC with repeater for synchronous operation 450 mm connection cable with 6 input distributor 2000 mm power cable with plug | | LFSET30 | | 5949 | 110 |
| | as above , however for LED converter 60 W / 12 V DC 12 input distributor <i>The splash-proof safety box Glasgow SIBOX is required for use in bathrooms!</i> <i>To supplement the LED starter set LSET30(60), LSET30(60)-F, LSET60-4K and follow-up set LFSET30 with more than 6 lights or for exceeding the wattage of the starter set.</i> | | LFSET60 | | 5996 | 143 |
| |  LMWS | LED microwave sensor 500 mm line with Euro coupler 2000 mm power cable with plug Sensor range: 0 - 8000 mm Coverage angle: 130° Maximum runtime: 10 sec - 10 min <i>Motion sensor for LED starter sets LSET30/60-F, LSETR30/60-F, LSET60-4K, follow-up set LFSET30/60 and LED power supply set ESS65-LED.</i> <i>Not possible behind mirrored doors.</i> | LMWS | | 15081 | 61 |

Additional lighting products can be found in chapter 4 lighting.

Wattage for LED lighted designs in wall units and wall shelves

MP-LA:

unit width 300 mm: 2.31 W
unit width 400 mm: 3.86 W
unit width 450 mm: 4.64 W
unit width 500 mm: 5.41 W
unit width 550 mm: 6.19 W
unit width 600 mm: 6.96 W
unit width 800 mm: 10.06 W
unit width 900 mm: 11.61 W
unit width 1000 mm: 13.16 W
unit width 1200 mm: 15.87 W

MP-WOGL:

unit width 300 mm: 5.83 W
unit width 400 mm: 8.16 W
unit width 450 mm: 9.32 W
unit width 500 mm: 10.49 W
unit width 550 mm: 11.65 W
unit width 600 mm: 12.82 W
unit width 800 mm: 17.48 W
unit width 900 mm: 19.81 W
unit width 1000 mm: 22.14 W
unit width 1200 mm: 26.80 W

MP-LED:

unit width 300 mm: 3.49 W
unit width 400 mm: 5.04 W
unit width 450 mm: 5.81 W
unit width 500 mm: 6.59 W
unit width 550 mm: 7.36 W
unit width 600 mm: 8.14 W
unit width 800 mm: 11.24 W
unit width 900 mm: 12.79 W
unit width 1000 mm: 14.34 W
unit width 1200 mm: 17.50 W

MP-LNP:

unit width 200 - 600 mm: 3.0 W
unit width 800 - 1200 mm: 2 x 3.0 W

MP-LMP and MP-WBL:

unit / shelf width 300 / 400 mm: 3.1 W
unit / shelf width 450 / 500 mm: 4.65 W
unit / shelf width 550 / 600 / 650 mm: 6.2 W
unit / shelf width 800 mm: 9.3 W
unit / shelf width 900 mm: 10.85 W
unit / shelf width 1000 mm: 12.4 W
unit / shelf width 1200 mm: 15.5 W

MP-LP and MP-WBLP:

unit / shelf width 300 / 400 mm: 3 W
unit / shelf width 450 / 500 mm: 4.5 W
unit / shelf width 550 / 600 / 650 mm: 6 W
unit / shelf width 800 mm: 9 W
unit / shelf width 900 mm: 10.5 W
unit / shelf width 1000 mm: 12 W
unit / shelf width 1200 mm: 15 W

Additional lighting products can be found in chapter 4 lighting.

| Bathroom accessories | | Abbreviation | | Order No. | Points |
|--|---|--------------|--|-----------|--------|
| | | Width in cm | | | |
| Additional lighting products can be found in chapter 4 lighting. | | | | | |
| | <p>Wattage for LED lighted designs:</p> <p>MP-RLA: shelf width 150 mm: 0.78 W shelf width 200 mm: 1.17 W shelf width 300 mm: 1.95 W shelf width 400 mm: 2.73 W shelf width 450 mm: 3.12 W shelf width 500 mm: 3.51 W shelf width 600 mm: 4.29 W</p> <p>MP-NGMLB: per every 1000 mm length: 7.8 W</p> <p>MP-NVLA and NKPL: per every 1000 mm length: 12 W</p> <p>MP-LWSP: Upright panel: 8,52 W</p> <p>MP-LADB: Top shelf width 600 - 636 mm = 6,2 W Top shelf width 800 - 836 mm = 9,3 W Top shelf width 900 - 936 mm = 10,58 W Top shelf width 1000 - 1036 mm = 12,4 W Top shelf width 1200 - 1236 mm = 15,5 W</p> | | | | |

Key



Suitable for a unit depth of 350 mm.



Suitable for a unit depth of 460 mm.



Not available in: USA and Canada.

Product Information

Hand basins / Material Description



| | |
|--------------------------|---|
| Mineral Composite | <p>Mineral composite is a natural, environmentally friendly material that is composed of approx. 75% dolomite rock and a mixture of liquid synthetic resin and gelcoat.</p> <p>The advantages of gelcoat are well-known in the construction of yachts and wind turbines.</p> <p>The resistance to UV light, water, wind, salt and dirt ensures a flawless surface of the highest quality.</p> <p>Mineral composite is unique as a material in the entire sanitary industry.</p> <p>The outstanding characteristics of mineral composite far exceed the properties of other materials, which is why it is commonly referred to as the "ceramic of the 21st century."</p> |
| Duratek | <p>Duratek® is the innovative, fully acrylic composite material for bathroom washbasins. Quartz, ceramic nanoparticles and a blend of innovative acrylic resins make the washbasin surface compact, resistant and with an incomparable aesthetics. Matt surface opens up a whole new world of design options: opaque slabs, which give a material sensation, silky to the touch. This velvety finish recreates refined environments of sober elegance and creates contrasts with glossy individual pieces or colored areas.</p> <p>The main features are:</p> <ul style="list-style-type: none">• Ultra-compact surface• "Velvet" touch surface• Extremely easy to clean• Matt colours extremely stable over time• Particularly resistant to impacts and shocks |

Hand basins for bathroom designs

MARMITE: Surface-mounted hand basin WB 0002 W 520C ICC, Mineral composite



87727

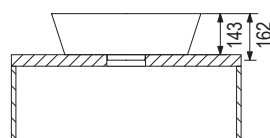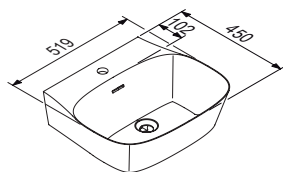

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87727 | white high gloss | 87727 | 337 |

Equipment

- 1 sink 475 x 310 x 115 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 519 x 450 mm
- Height: 162 mm
- Cut-out dimensions: 180 x 365 mm



Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

MARMITE: Surface-mounted hand basin WB 0517 C 600C, Mineral composite



87726



| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87726 | white high gloss | 87726 | 282 |

Equipment

- 1 sink 570 x 335 x 100 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 600 x 470 mm
- Height: 144 mm
- Cut-out dimensions: 180 x 365 mm


Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*



Hand basins for bathroom designs

MARMITE: Surface-mounted hand basin WB 0517 C 600C ICC, Mineral composite, without overflow

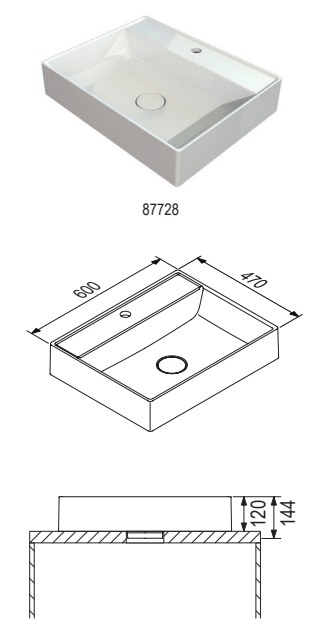

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87728 | white high gloss | 87728 | 277 |

Equipment

- 1 sink 570 x 335 x 100 mm
- 1 tap hole

Dimensions


- Overall dimensions: 600 x 470 mm
- Height: 144 mm
- Cut-out dimensions: 180 x 365 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW* / NBW*.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste.

MARMITE: Surface-mounted hand basin WB 0517 C 800C, Mineral composite

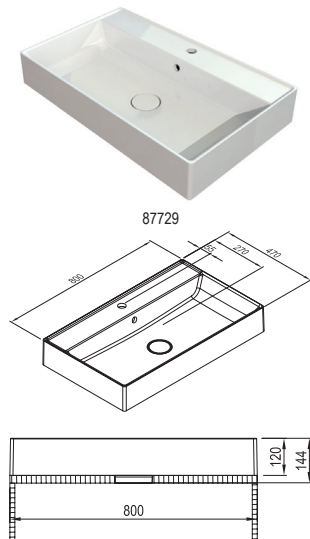

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87729 | white high gloss | 87729 | 310 |

Equipment

- 1 sink 770 x 335 x 100 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 800 x 470 mm
- Height: 144 mm
- Cut-out dimensions: 180 x 365 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW* / NBW*.

NEW



Hand basins for bathroom designs

TURKUAZ: Surface-mounted hand basin CANAK 45, ceramic



| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87732 | white high gloss | 87732 | 185 |
| 87734 | black matt | 87734 | 260 |

Equipment

- 1 sink 431 x 312 x 103 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 450 mm
- Height: 150 mm
- Cut-out dimensions: 120 x 265 mm


Order odour-stop separately.

Suitable for installation in bathroom vanity units BW* / NBW*.

NEW



TURKUAZ: Surface-mounted hand basin AQUA 55, ceramic

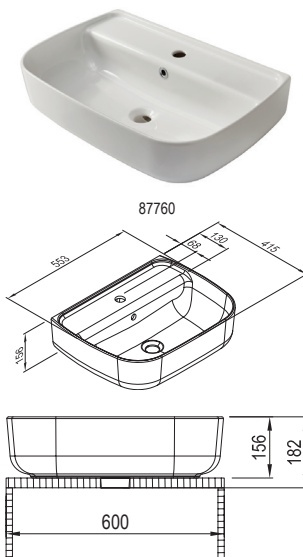

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87760 | white high gloss | 87760 | 258 |

Equipment

- 1 sink 553 x 274 x 126 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 553 x 415 mm
- Height: 182 mm
- Cut-out dimensions: 120 x 265 mm

Order odour-stop separately.


Suitable for installation in bathroom vanity units BW* / NBW*.

NEW



Hand basins for bathroom designs

TURKUAZ: Surface-mounted hand basin AQUA 75, ceramic

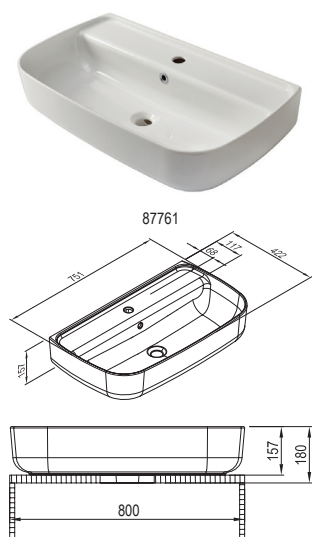

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87761 | white high gloss | 87761 | 269 |

Equipment

- 1 sink 731 x 295 x 135 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 751 x 422 mm
- Height: 157 mm
- Cut-out dimensions: 120 x 265 mm


Order odour-stop separately.

Suitable for installation in bathroom vanity units BW* / NBW*.

NEW

USA
CAN

TURKUAZ: Surface-mounted hand basin ONE, ceramic, without overflow

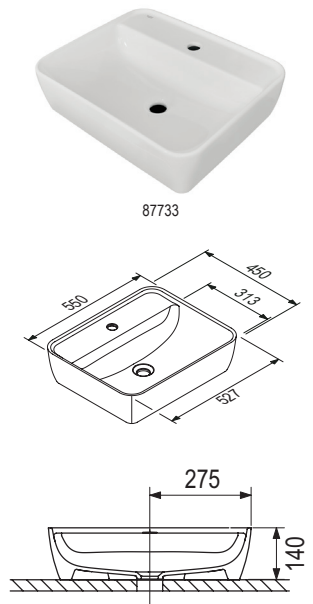

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87733 | white high gloss | 87733 | 178 |

Equipment

- 1 sink 530 x 320 x 120 mm
- 1 tap hole

Dimensions

- Overall dimensions: 550 x 450 mm
- Height: 140 mm
- Cut-out dimensions: 120 x 237,5 mm

Order odour-stop separately.


Suitable for installation in bathroom vanity units BW* / NBW*.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710).

USA
CAN

Hand basins for bathroom designs

TURKUAZ: Furniture hand basin CUBO 43, ceramic

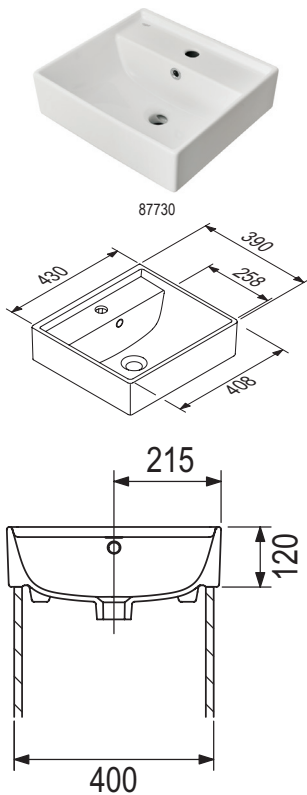

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87730 | white high gloss | 87730 | 204 |

Equipment

- 1 sink 404 x 254 x 140 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 430 x 390 mm
- Height: 187 mm


Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

35

USA
CAN

TURKUAZ: Furniture hand basin CUBO 63, ceramic

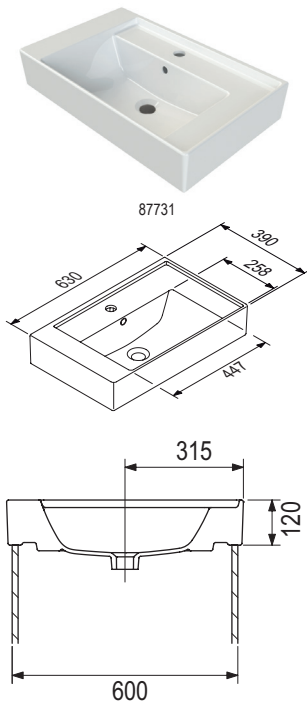

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87731 | white high gloss | 87731 | 238 |

Equipment

- 1 sink 450 x 270 x 142 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 630 x 390 mm
- Height: 188 mm

Order odour-stop separately.


Suitable for installation in bathroom vanity units BW / NBW*.*

35

USA
CAN

Hand basins for bathroom designs


MARMITE: Furniture hand basin MEGX 600C, Mineral composite

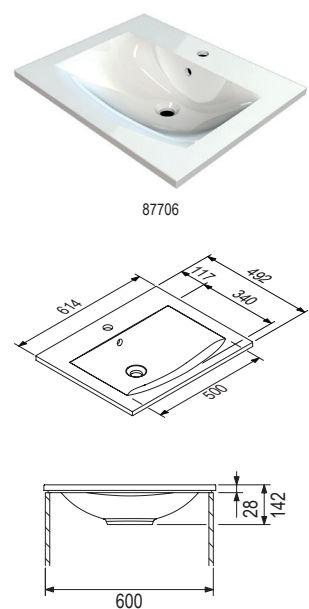

| Description | Colour | Order-no. | Points |
|---|------------------|-----------|--------|
| 87706 | white high gloss | 87706 | 231 |
| <div><div>Equipment<ul style="list-style-type: none">• 1 sink 500 x 340 x 120 mm• 1 tap hole• 1 overflow</div><div>Dimensions<ul style="list-style-type: none">• Overall dimensions: 614 x 492 mm• Height: 142 mm</div></div> <p><i>Order odour-stop separately.</i></p> <p><i>Suitable for installation in bathroom vanity units BW* / NBW*.</i></p> <p><i>Optionally available: LED light LEDWT160, refer to chapter 7 bathroom accessories.</i></p> <p><i>If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.</i></p> | | | |



MARMITE: Furniture hand basin MEGX 600C ICC, Mineral composite, without overflow

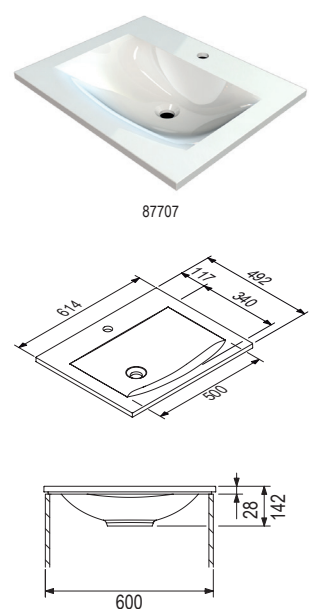


| Description | Colour | Order-no. | Points |
|---|------------------|-----------|--------|
| 87707 | white high gloss | 87707 | 226 |
| <div><div>Equipment<ul style="list-style-type: none">• 1 sink 500 x 340 x 120 mm• 1 tap hole</div><div>Dimensions<ul style="list-style-type: none">• Overall dimensions: 614 x 492 mm• Height: 142 mm</div></div> <p><i>Order odour-stop separately.</i></p> <p><i>Suitable for installation in bathroom vanity units BW* / NBW*.</i></p> <p><i>Optionally available: LED light LEDWT160, refer to chapter 7 bathroom accessories.</i></p> <p><i>If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.</i></p> <p><i>This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).</i></p> | | | |



Hand basins for bathroom designs


MARMITE: Furniture hand basin MEGX 800C, Mineral composite

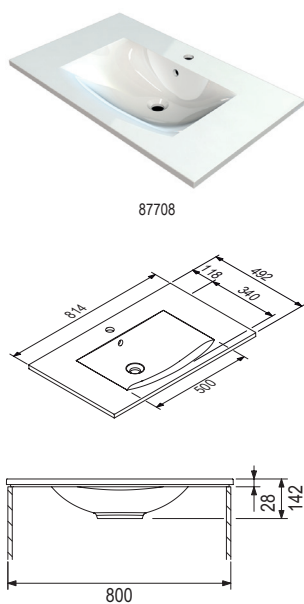

| Description | Colour | Order-no. | Points |
|---|------------------|-----------|--------|
| 87708 | white high gloss | 87708 | 253 |
| <div> <div> Equipment <ul style="list-style-type: none"> • 1 sink 500 x 340 x 120 mm • 1 tap hole • 1 overflow </div> <div> Dimensions <ul style="list-style-type: none"> • Overall dimensions: 814 x 492 mm • Height: 142 mm </div> </div> <p><i>Order odour-stop separately.</i></p> <p><i>Suitable for installation in bathroom vanity units BW* / NBW*.</i></p> <p><i>Optionally available: LED light LEDWT180, refer to chapter 7 bathroom accessories.</i></p> <p><i>If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.</i></p> | | | |



MARMITE: Furniture hand basin MEGX 800C ICC, Mineral composite, without overflow

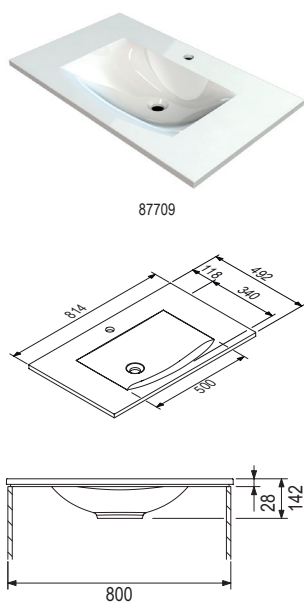


| Description | Colour | Order-no. | Points |
|--|------------------|-----------|--------|
| 87709 | white high gloss | 87709 | 250 |
| <div> <div> Equipment <ul style="list-style-type: none"> • 1 sink 500 x 340 x 120 mm • 1 tap hole </div> <div> Dimensions <ul style="list-style-type: none"> • Overall dimensions: 814 x 492 mm • Height: 142 mm </div> </div> <p><i>Order odour-stop separately.</i></p> <p><i>Suitable for installation in bathroom vanity units BW* / NBW*.</i></p> <p><i>Optionally available: LED light LEDWT180, refer to chapter 7 bathroom accessories.</i></p> <p><i>If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.</i></p> <p><i>This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).</i></p> | | | |



Hand basins for bathroom designs


MARMITE: Furniture hand basin MEGX 1000C, Mineral composite

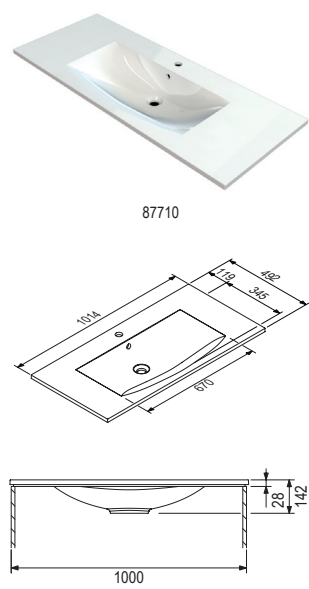

| Description | Colour | Order-no. | Points |
|--|------------------|-----------|--------|
| 87710 | white high gloss | 87710 | 291 |
| <div><div>Equipment<ul style="list-style-type: none">• 1 sink 670 x 345 x 120 mm• 1 tap hole• 1 overflow</div><div>Dimensions<ul style="list-style-type: none">• Overall dimensions: 1014 x 492 mm• Height: 142 mm</div></div> <p><i>Order odour-stop separately.</i></p> <p><i>Suitable for installation in bathroom vanity units BW* / NBW*.</i></p> <p><i>Optionally available: LED light LEDWT*, refer to chapter 7 bathroom accessories.</i></p> <p><i>If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.</i></p> | | | |



MARMITE: Furniture hand basin MEGX 1000C ICC, Mineral composite, without overflow

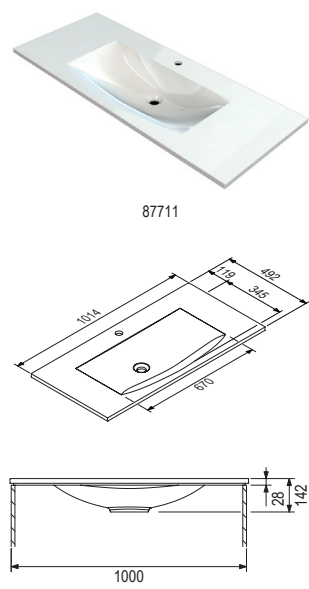

| Description | Colour | Order-no. | Points |
|--|------------------|-----------|--------|
| 87711 | white high gloss | 87711 | 286 |
| <div><div>Equipment<ul style="list-style-type: none">• 1 sink 670 x 345 x 120 mm• 1 tap hole</div><div>Dimensions<ul style="list-style-type: none">• Overall dimensions: 1014 x 492 mm• Height: 142 mm</div></div> <p><i>Order odour-stop separately.</i></p> <p><i>Suitable for installation in bathroom vanity units BW* / NBW*.</i></p> <p><i>Optionally available: LED light LEDWT*, refer to chapter 7 bathroom accessories.</i></p> <p><i>If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.</i></p> <p><i>This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).</i></p> | | | |





Hand basins for bathroom designs

MARMITE: Furniture hand basin MEGX 1200C, Mineral composite



87712



| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87712 | white high gloss | 87712 | 326 |

Equipment

- 1 sink 670 x 345 x 120 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 1214 x 492 mm
- Height: 142 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

Optionally available: LED light LEDWT220, refer to chapter 7 bathroom accessories.



If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.



MARMITE: Furniture hand basin MEGX 1200C ICC, Mineral composite, without overflow



87713



| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87713 | white high gloss | 87713 | 324 |

Equipment

- 1 sink 670 x 345 x 120 mm
- 1 tap hole

Dimensions

- Overall dimensions: 1214 x 492 mm
- Height: 142 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

Optionally available: LED light LEDWT220, refer to chapter 7 bathroom accessories.


If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).



Hand basins for bathroom designs

MARMITE: Furniture hand basin MEGX 1200D with 2 sinks, Mineral composite

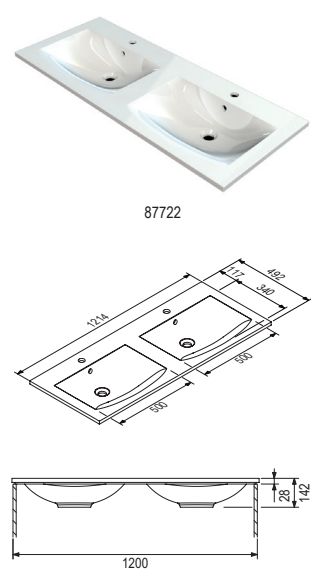

| Description | Colour | Order-no. | Points |
|---|------------------|--|--------|
| 87722 | white high gloss | 87722 | 343 |
| Equipment <ul style="list-style-type: none">• 2 sinks 500 x 340 x 120 mm• 2 tap holes• 2 overflows | | Dimensions <ul style="list-style-type: none">• Overall dimensions: 1214 x 492 mm• Height: 142 mm | |

Order odour-stop separately.


Suitable for installation in bathroom vanity units BW / NBW*.*

Optionally available: LED light LEDWT220, refer to chapter 7 bathroom accessories.

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.



MARMITE: Furniture hand basin MEGX 1200D ICC with 2 sinks, Mineral composite, without overflow

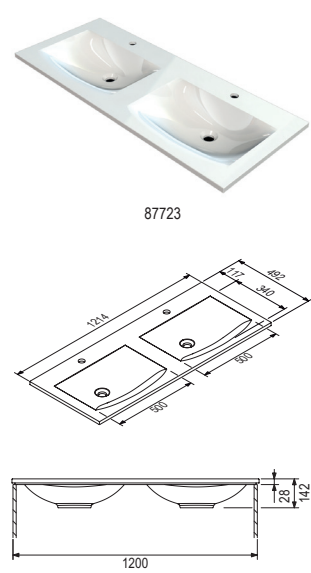

| Description | Colour | Order-no. | Points |
|---|------------------|--|--------|
| 87723 | white high gloss | 87723 | 337 |
| Equipment <ul style="list-style-type: none">• 2 sinks, each 500 x 340 x 120 mm• 2 tap holes | | Dimensions <ul style="list-style-type: none">• Overall dimensions: 1214 x 492 mm• Height: 142 mm | |

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*


Optionally available: LED light LEDWT220, refer to chapter 7 bathroom accessories.

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).



NICOS INTERNATIONAL: Furniture hand basin MAX 610, Mineral composite

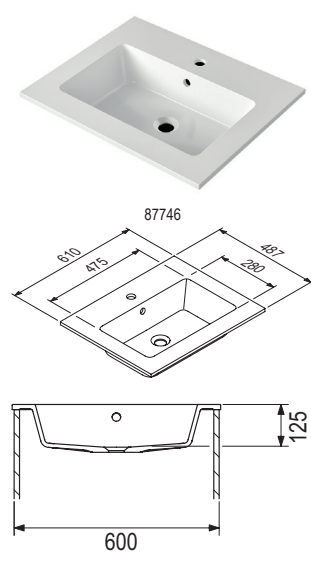

| Description | Colour | Order-no. | Points |
|--|------------------|---|--------|
| 87746 | white high gloss | 87746 | 188 |
| Equipment <ul style="list-style-type: none">• 1 sink 475 x 280 x 125 mm• 1 tap hole• 1 overflow | | Dimensions <ul style="list-style-type: none">• Overall dimensions: 610 x 487 mm• Height: 140 mm | |

Order odour-stop separately.


Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.



Hand basins for bathroom designs

NICOS INTERNATIONAL: Furniture hand basin MAX 810, Mineral composite

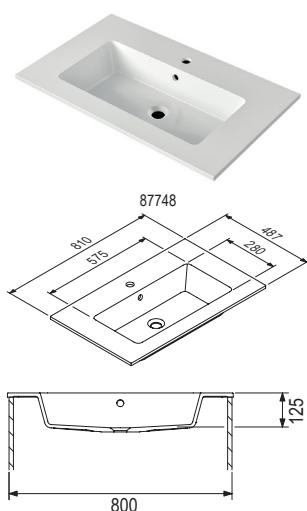

| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87748 | white high gloss | 87748 | 210 |

Equipment

- 1 sink 575 x 280 x 125 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 810 x 487 mm
- Height: 140 mm

Order odour-stop separately.


Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

46

USA
CAN

NICOS INTERNATIONAL: Furniture hand basin MAX 1010, Mineral composite

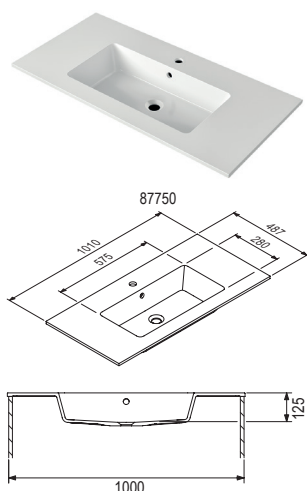

| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87750 | white high gloss | 87750 | 245 |

Equipment

- 1 sink 575 x 280 x 125 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 1010 x 487 mm
- Height: 140 mm

Order odour-stop separately.


Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

46

USA
CAN

NICOS INTERNATIONAL: Furniture hand basin MAX 1210, Mineral composite

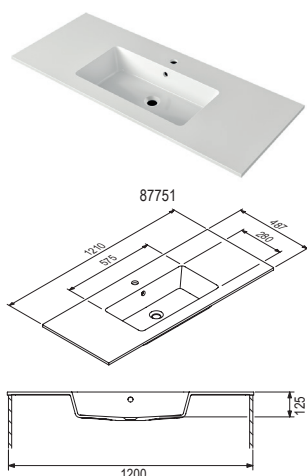

| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87751 | white high gloss | 87751 | 285 |

Equipment

- 1 sink 575 x 280 x 125 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 1210 x 487 mm
- Height: 140 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*


If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

46

USA
CAN

Hand basins for bathroom designs

NICOS INTERNATIONAL: Furniture hand basin **MAX 1210D** with 2 sinks, Mineral composite

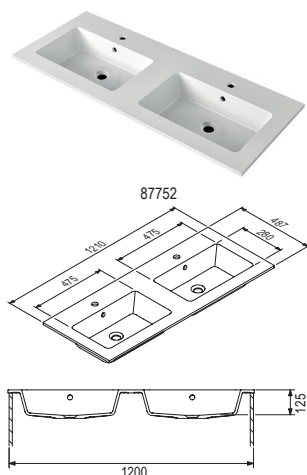

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87752 | white high gloss | 87752 | 304 |

Equipment

- 2 sinks 475 x 280 x 125 mm
- 2 tap holes
- 2 overflows

Dimensions

- Overall dimensions: 1210 x 487 mm
- Height: 140 mm


Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.



NICOS INTERNATIONAL: Furniture hand basin **MAX 1610D** with 2 sinks, Mineral composite

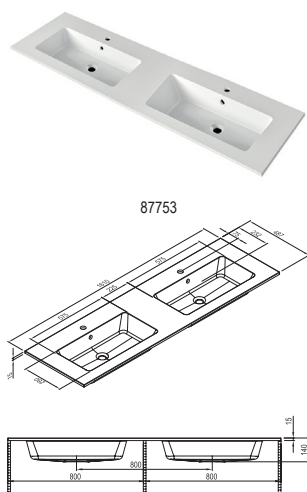

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87753 | white high gloss | 87753 | 390 |

Equipment

- 2 sinks 575 x 280 x 125 mm
- 2 tap holes
- 2 overflows

Dimensions

- Overall dimensions: 1610 x 487 mm
- Height: 140 mm


Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.



MARMITE: Furniture hand basin **NobX 660**, Mineral composite, without overflow

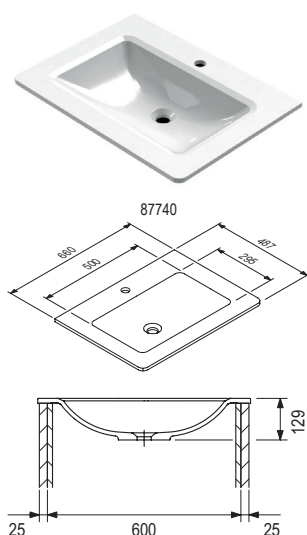

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87740 | white high gloss | 87740 | 219 |

Equipment

- 1 sink 500 x 295 x 107 mm
- 1 tap hole

Dimensions

- Overall dimensions: 660 x 487 mm
- Height: 129 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*



This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

Plan only in conjunction with rounded end uprights WAR25*!



Hand basins for bathroom designs

MARMITE: Furniture hand basin NobX 860, Mineral composite, without overflow



| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87741 | white high gloss | 87741 | 241 |

Equipment

- 1 sink 500 x 295 x 107 mm
- 1 tap hole

Dimensions

- Overall dimensions: 860 x 487 mm
- Height: 129 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*



This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

Plan only in conjunction with rounded end uprights WAR25!

46

USA
CAN

MARMITE: Furniture hand basin NobX 1060, Mineral composite, without overflow



| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87742 | white high gloss | 87742 | 277 |

Equipment

- 1 sink 670 x 295 x 107 mm
- 1 tap hole

Dimensions

- Overall dimensions: 1060 x 487 mm
- Height: 129 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*



This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

Plan only in conjunction with rounded end uprights WAR25!

46

USA
CAN

MARMITE: Furniture hand basin NobX 1260, Mineral composite, without overflow



| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87743 | white high gloss | 87743 | 312 |

Equipment

- 1 sink 670 x 295 x 107 mm
- 1 tap hole

Dimensions

- Overall dimensions: 1260 x 487 mm
- Height: 129 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).


Plan only in conjunction with rounded end uprights WAR25!

46

USA
CAN

Hand basins for bathroom designs


MARMITE: Furniture hand basin NobX 1260 D with 2 sinks, Mineral composite, without overflow

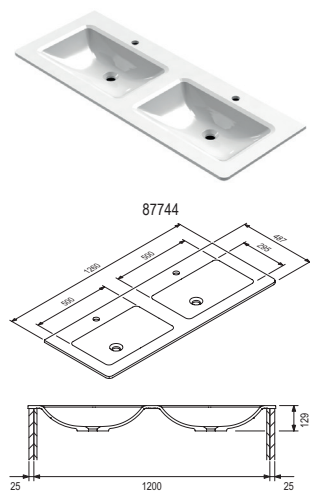

| Description | Colour | Order-no. | Points |
|--|------------------|-----------|--------|
| 87744 | white high gloss | 87744 | 327 |
| <div><div>Equipment<ul style="list-style-type: none">• 2 sinks 500 x 295 x 107 mm• 2 tap holes</div><div>Dimensions<ul style="list-style-type: none">• Overall dimensions: 1260 x 487 mm• Height: 129 mm</div></div> <p><i>Order odour-stop separately.</i></p> <p><i>Suitable for installation in bathroom vanity units BW* / NBW*.</i></p> <p><i>This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).</i></p> <p>Plan only in conjunction with rounded end uprights WAR25*!</p> | | | |



MARMITE: Furniture hand basin NobX 1660 D with 2 sinks, Mineral composite, without overflow

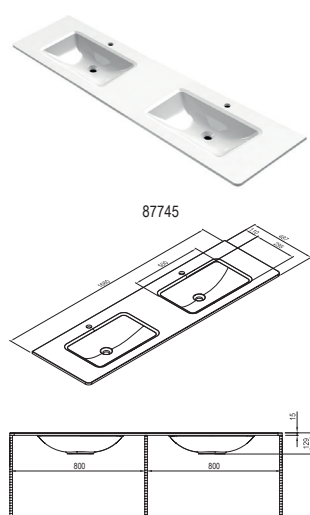


| Description | Colour | Order-no. | Points |
|--|------------------|-----------|--------|
| 87745 | white high gloss | 87745 | 439 |
| <div><div>Equipment<ul style="list-style-type: none">• 2 sinks 500 x 295 x 107 mm• 2 tap holes</div><div>Dimensions<ul style="list-style-type: none">• Overall dimensions: 1660 x 487 mm• Height: 129 mm</div></div> <p><i>Order odour-stop separately.</i></p> <p><i>Suitable for installation in bathroom vanity units BW* / NBW*.</i></p> <p><i>This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).</i></p> <p>Plan only in conjunction with rounded end uprights WAR25*!</p> | | | |



Hand basins for bathroom designs

MARMITE: Furniture hand basin RonX 410LR, Mineral composite, without overflow

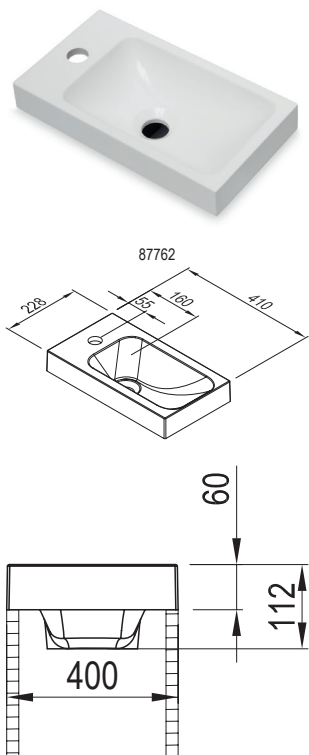

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87762 | white high gloss | 87762 | 133 |

Equipment

- 1 sink 308 x 168 x 90 mm
- 1 tap hole
- reversible

Dimensions

- Overall dimensions: 410 x 228 mm
- Height: 112 mm


Order odour-stop separately.

Suitable for installation in bathroom vanity unit BWG40-58.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710).

NEW

MARMITE: Furniture hand basin RonX 600C, Mineral composite, without overflow

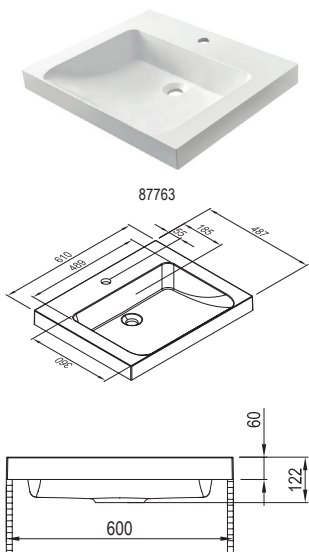

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87763 | white high gloss | 87763 | 254 |

Equipment

- 1 sink 489 x 360 x 100 mm
- 1 tap hole

Dimensions

- Overall dimensions: 610 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.


This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

NEW

46*

Hand basins for bathroom designs

MARMITE: Furniture hand basin RonX 800C, Mineral composite, without overflow

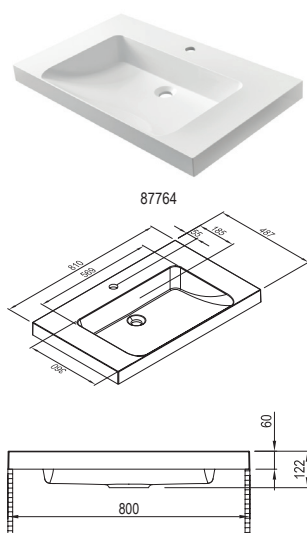

| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87764 | white high gloss | 87764 | 280 |

Equipment

- 1 sink 569 x 360 x 100 mm
- 1 tap hole

Dimensions

- Overall dimensions: 810 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*


If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

NEW

46

MARMITE: Furniture hand basin RonX 800C, Mineral Composite, without overflow and tap hole

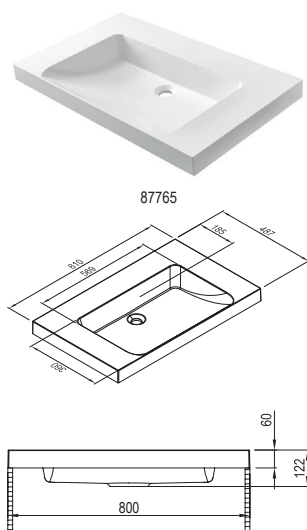

| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87765 | white high gloss | 87765 | 280 |

Equipment

- 1 sink 569 x 360 x 100 mm

Dimensions

- Overall dimensions: 810 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.


This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

NEW

46

**USA
CAN**

MARMITE: Furniture hand basin RonX 1000C, Mineral composite, without overflow

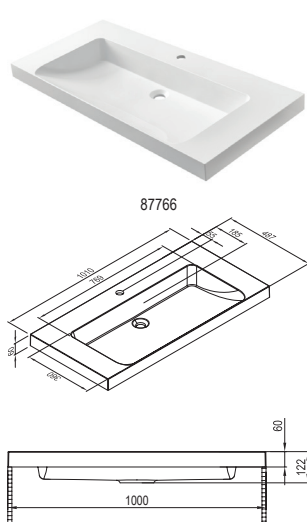

| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87766 | white high gloss | 87766 | 323 |

Equipment

- 1 sink 769 x 360 x 100 mm
- 1 tap hole

Dimensions

- Overall dimensions: 1010 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.


This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

NEW

46

Hand basins for bathroom designs

MARMITE: Furniture hand basin RonX 1000C, Mineral Composite, without overflow and tap hole

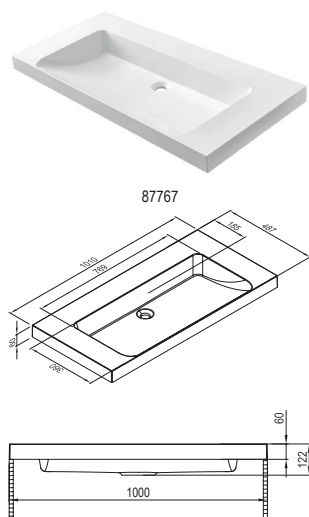

| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87767 | white high gloss | 87767 | 323 |

Equipment

- 1 sink 769 x 360 x 100 mm

Dimensions

- Overall dimensions: 1010 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*


If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

NEW

46

MARMITE: Furniture hand basin RonX 1200C, Mineral composite, without overflow

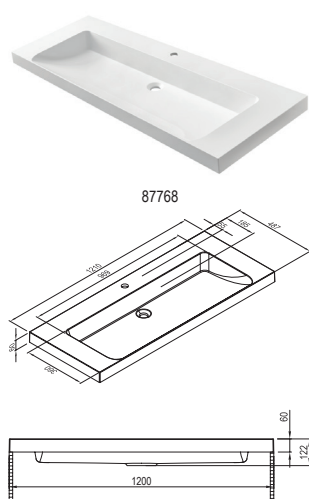

| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87768 | white high gloss | 87768 | 362 |

Equipment

- 1 sink 969 x 360 x 100 mm
- 1 tap hole

Dimensions

- Overall dimensions: 1210 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*


If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

NEW

46

MARMITE: Furniture hand basin RonX 1200C, Mineral Composite, without overflow and tap hole

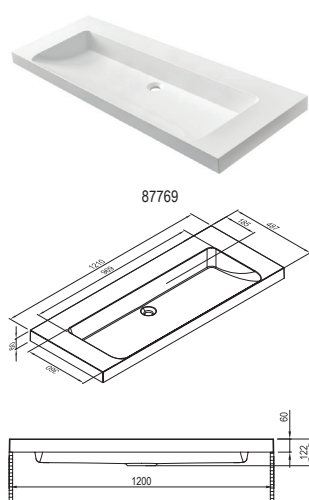

| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87769 | white high gloss | 87769 | 381 |

Equipment

- 1 sink 969 x 360 x 100 mm

Dimensions

- Overall dimensions: 1210 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).


NEW

46

USA
CAN

Hand basins for bathroom designs

MARMITE: Furniture hand basin RonX 1200D with 2 sinks, Mineral composite, without overflow

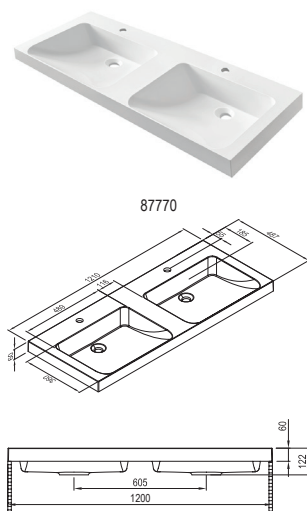

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87770 | white high gloss | 87770 | 381 |

Equipment

- 2 sinks 489 x 360 x 100 mm
- 2 tap holes

Dimensions

- Overall dimensions: 1210 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*


If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

NEW

46

MARMITE: Furniture hand basin RonX 1600D with 2 sinks, Mineral composite, without overflow

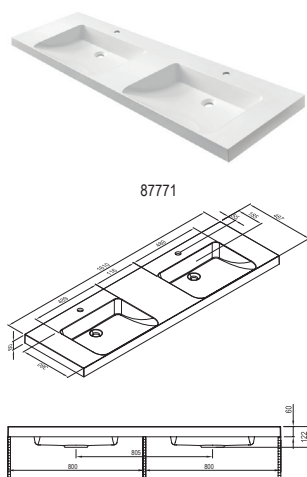

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87771 | white high gloss | 87771 | 472 |

Equipment

- 2 sinks 489 x 360 x 100 mm
- 2 tap holes

Dimensions

- Overall dimensions: 1610 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*


If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

NEW

46

DISEGNO CERAMICA: Furniture hand basin LAVABO BLOB 600, ceramic

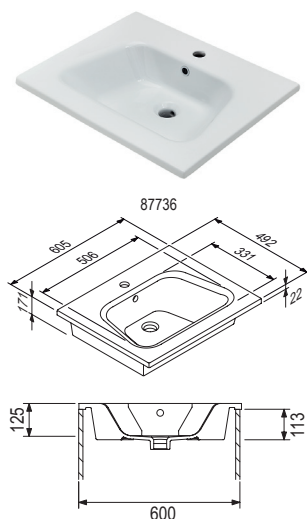

| Description | Colour | Order-no. | Points |
|-------------|------------------|-----------|--------|
| 87736 | white high gloss | 87736 | 258 |

Equipment

- 1 sink 506 x 331 x 125 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 605 x 492 mm
- Height: 171 mm

Order odour-stop separately.


Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

46

Hand basins for bathroom designs

DISEGNO CERAMICA: Furniture hand basin LAVABO BLOB 900, ceramic

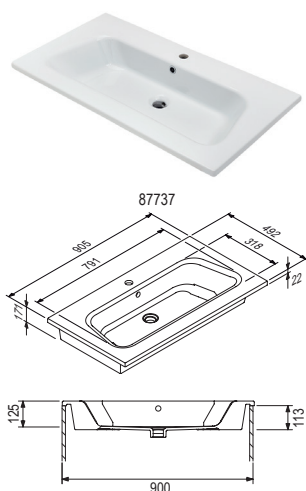

| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87737 | white high gloss | 87737 | 350 |

Equipment

- 1 sink 791 x 318 x 125 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 905 x 492 mm
- Height: 171 mm


Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

46

DISEGNO CERAMICA: Furniture hand basin LAVABO BLOB 1200, ceramic

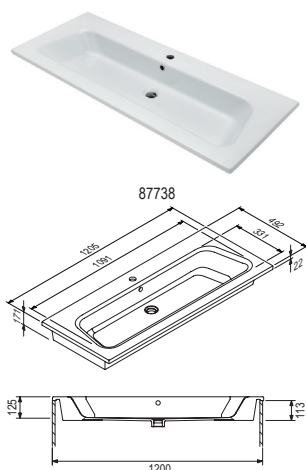

| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87738 | white high gloss | 87738 | 475 |

Equipment

- 1 sink 1091 x 331 x 125 mm
- 1 tap hole
- 1 overflow

Dimensions

- Overall dimensions: 1205 x 492 mm
- Height: 171 mm


Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

46

DISEGNO CERAMICA: Furniture hand basin LAVABO BLOB 1200 2 V with 2 sinks, ceramic

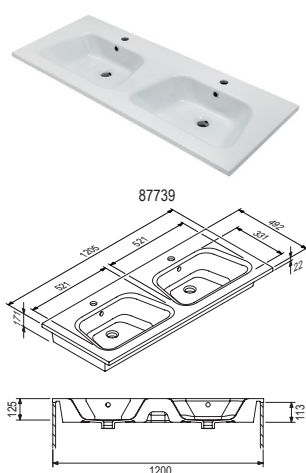

| Description | Colour | Order-no. | Points |
|--------------|------------------|-----------|--------|
| 87739 | white high gloss | 87739 | 491 |

Equipment

- 2 sinks 521 x 331 x 125 mm
- 2 tap holes
- 2 overflows

Dimensions

- Overall dimensions: 1205 x 492 mm
- Height: 171 mm

Order odour-stop separately.


Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

46

Hand basins for bathroom designs

ELLECI: Furniture hand basin VIVO 60, Duratek®, without overflow

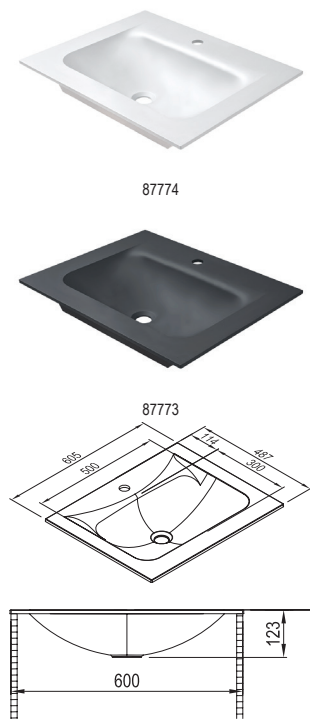

| Description | Colour | Order-no. | Points |
|-------------|-------------|-----------|--------|
| 87774 | honed white | 87774 | 276 |
| 87773 | black matt | 87773 | 276 |

Equipment

- 1 sink 500 x 300 x 110 mm
- 1 tap hole

Dimensions

- Overall dimensions: 605 x 487 mm
- Height: 122 mm

Order odour-stop separately.


Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).



ELLECI: Furniture hand basin VIVO 80, Duratek®, without overflow

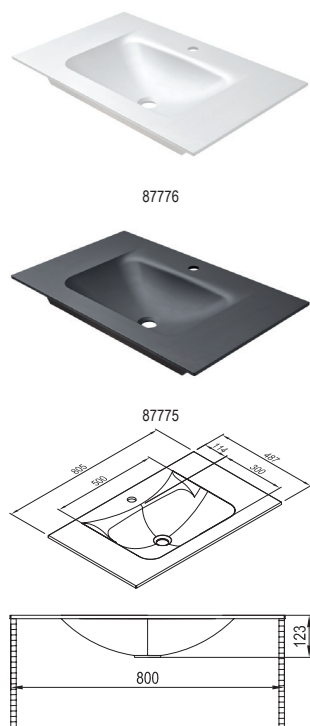

| Description | Colour | Order-no. | Points |
|-------------|-------------|-----------|--------|
| 87776 | honed white | 87776 | 299 |
| 87775 | black matt | 87775 | 299 |

Equipment

- 1 sink 500 x 300 x 110 mm
- 1 tap hole

Dimensions

- Overall dimensions: 805 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).



Hand basins for bathroom designs



ELLECI: Furniture hand basin VIVO 100, Duratek®, without overflow



87778



87777



| Description | Colour | Order-no. | Points |
|--------------|-------------|-----------|--------|
| 87778 | honed white | 87778 | 336 |
| 87777 | black matt | 87777 | 336 |

Equipment

- 1 sink 670 x 300 x 110 mm
- 1 tap hole

Dimensions

- Overall dimensions: 1005 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

NEW

46



ELLECI: Furniture hand basin VIVO 120, Duratek®, without overflow



87780



87779



| Description | Colour | Order-no. | Points |
|--------------|-------------|-----------|--------|
| 87780 | honed white | 87780 | 393 |
| 87779 | black matt | 87779 | 393 |

Equipment

- 1 sink 670 x 300 x 110 mm
- 1 tap hole

Dimensions

- Overall dimensions: 1205 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.

This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

NEW

46

Hand basins for bathroom designs



ELLECI: Furniture hand basin VIVO 122 with 2 sinks, Duratek®, without overflow



87782



87781



| Description | Colour | Order-no. | Points |
|-------------|-------------|-----------|--------|
| 87782 | honed white | 87782 | 425 |
| 87781 | black matt | 87781 | 425 |

Equipment

- 2 sinks 500 x 300 x 110 mm
- 2 tap holes

Dimensions

- Overall dimensions: 1205 x 487 mm
- Height: 122 mm

Order odour-stop separately.

Suitable for installation in bathroom vanity units BW / NBW*.*

If the hand basin is framed by 16 mm upright panels, we recommend using towel rail HTWH, refer to chapter 7 bathroom accessories.


This hand basin has no overflow, which could lead to water spilling over and could result in water damage to furniture or to the bathroom. For this hand basin please always use a FREE FLOW basin waste (17710) or the Clou drain and overflow (17715).

NEW

46

Hand basin accessories

Geberit dip tube odour stop



| Description | Colour | Order-no. | Points |
|-------------|--------|-----------|--------|
| 17713 | white | 17713 | 69 |

Equipment


- space-saving model, white plastic
- for space-saving connection of basins in bathroom furniture
- horizontal outlet, water trap height: 50 mm

Dimensions

- diameter: 32 mm
- G 1 1/4"



Geberit hand basin odour stop with dip tube, chrome



| Description | Colour | Order-no. | Points |
|-------------|--------|-----------|--------|
| 17714 | chrome | 17714 | 139 |

Equipment

- chromium-plated plastic
- wall rosette
- for space-saving connection of basins in bathroom furniture




Hand basin accessories

Free flow basin waste



17710



| Description | Colour | Order-no. | Points |
|---|--------|---|--------|
| 17710 | chrome | 17710 | 41 |
| Equipment <ul style="list-style-type: none">• stem valve stainless steel/plastic• plug cover, chrome-plated• with strainer insert• for hand basins without overflow | | Dimensions <ul style="list-style-type: none">• G 1 1/4" x 65 x 75 mm | |





Geberit Clou drain and overflow



17715



17715



| Description | Colour | Order-no. | Points |
|--|--------|---|--------|
| 17715 | | 17715 | 80 |
| Equipment <ul style="list-style-type: none">• for hand basins without visible overflow• quality monitoring according to EN 274-3• hygienic due to optimum flow behaviour• sealable drain• actuation via lever linkage• overflow function invisible• adapts to length and height of hand basin• chrome-plated top shelf | | Scope of delivery <ul style="list-style-type: none">• drain valve• control lever• plug• hand basin connection | |



Hand basin taps for bathroom designs

CARLO NOBILI: Single-lever basin mixer ACQUARIO, high-pressure

The image block contains three visual elements. At the top left is a chrome hand basin tap, model 17717, shown from a front-three-quarter perspective. Below it is a black hand basin tap, model 17718, also from a front-three-quarter perspective. At the bottom is a detailed technical line drawing of the tap assembly. This drawing includes side and top views with various dimension lines and labels. Key dimensions shown are 152 mm for the total height, 98 mm for the spout height above the worktop, 117 mm for the spout length, 49 mm for the tap body width, 36 mm for the handle width, 390 mm for the flexible hose length, 135 mm for the base width, 49 mm for the base height, 36 mm for the base width, and 63 mm for the tap hole diameter. Connection labels include 'G1-1/4' and 'G3/8'.

| Description | Colour | Order-no. | Points |
|-------------------------------------|---------------------|-----------|--------|
| 17717 Hand basin tap | chrome | 17717 | 136 |
| 17718 Hand basin tap | chrome + black matt | 17718 | 181 |
| 17733 Hand basin tap (for NZ/AU) | chrome | 17733 | 168 |
| 17734 Hand basin tap (for NZ/AU) | chrome + black matt | 17734 | 206 |
| 17735 Hand basin tap (for SA/AE) | chrome | 17735 | 153 |
| 17736 Hand basin tap (for SA/AE) | chrome + black matt | 17736 | 203 |

Equipment

- with pop-up basin waste
- connection for hot and cold water
- aerator 24 mm diameter
- flexible connection hoses


Dimensions

- tap hole 35 mm diameter
- height of spout above worktop 98 mm
- highest point above worktop 152 mm
- spout 117 mm

This image shows two small, red, circular buttons stacked vertically. The top button is labeled 'USA' and the bottom button is labeled 'CAN', both in white capital letters.

Hand basin taps for bathroom designs

CARLO NOBILI: Single-lever basin mixer ONE, high-pressure

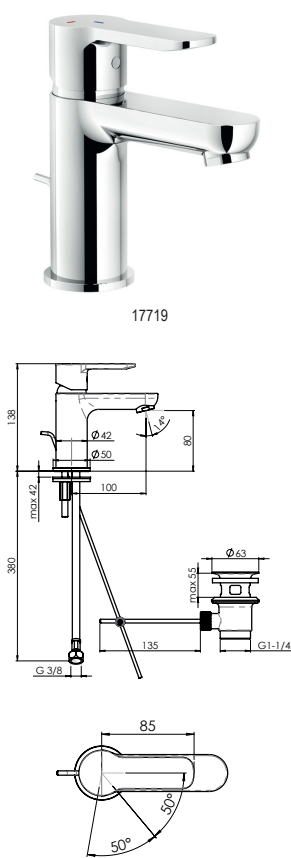


| Description | Colour | Order-no. | Points |
|-------------------------|--------|-----------|--------|
| 17719 Hand basin tap | chrome | 17719 | 121 |

| Equipment | Dimensions |
|--|---|
| <ul style="list-style-type: none">• with pop-up basin waste• connection for hot and cold water• aerator 24 mm diameter• flexible connection hoses | <ul style="list-style-type: none">• tap hole 35 mm diameter• height of spout above worktop 80 mm• highest point above worktop 138 mm• spout 100 mm |



GROHE: Single-lever basin mixer BauEdge S, high-pressure

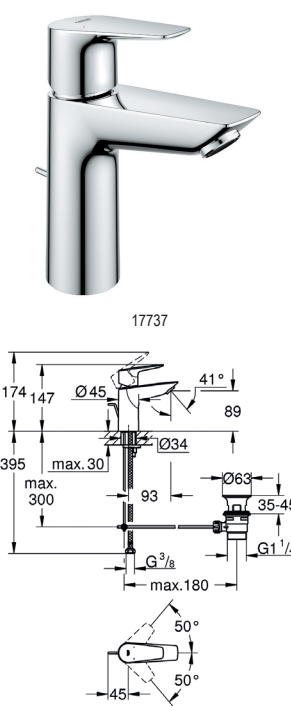

| Description | Colour | Order-no. | Points |
|-------------------------|--------|-----------|--------|
| 17737 Hand basin tap | chrome | 17737 | 121 |

| Equipment | Dimensions |
|---|--|
| <ul style="list-style-type: none">• with pop-up basin waste• connection for hot and cold water• flexible connection hoses | <ul style="list-style-type: none">• tap hole 34 mm diameter• height of spout above worktop 89 mm• highest point above worktop 174 mm• spout 93 mm |




Hand basin taps for bathroom designs

GROHE: Single-lever basin mixer BauEdge L, high-pressure



17739

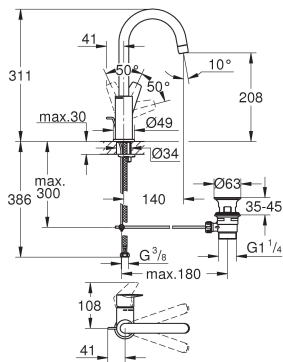

| Description | Colour | Order-no. | Points |
|-------------------------|--------|-----------|--------|
| 17739 Hand basin tap | chrome | 17739 | 156 |

Equipment

- with pop-up basin waste
- swivel spout, swivel range 360°
- connection for hot and cold water
- flexible connection hoses

Dimensions

- tap hole 34 mm diameter
- height of spout above worktop 208 mm
- highest point above worktop 311 mm
- spout 140 mm



Typen- / Zubehörliste - EN

92373

